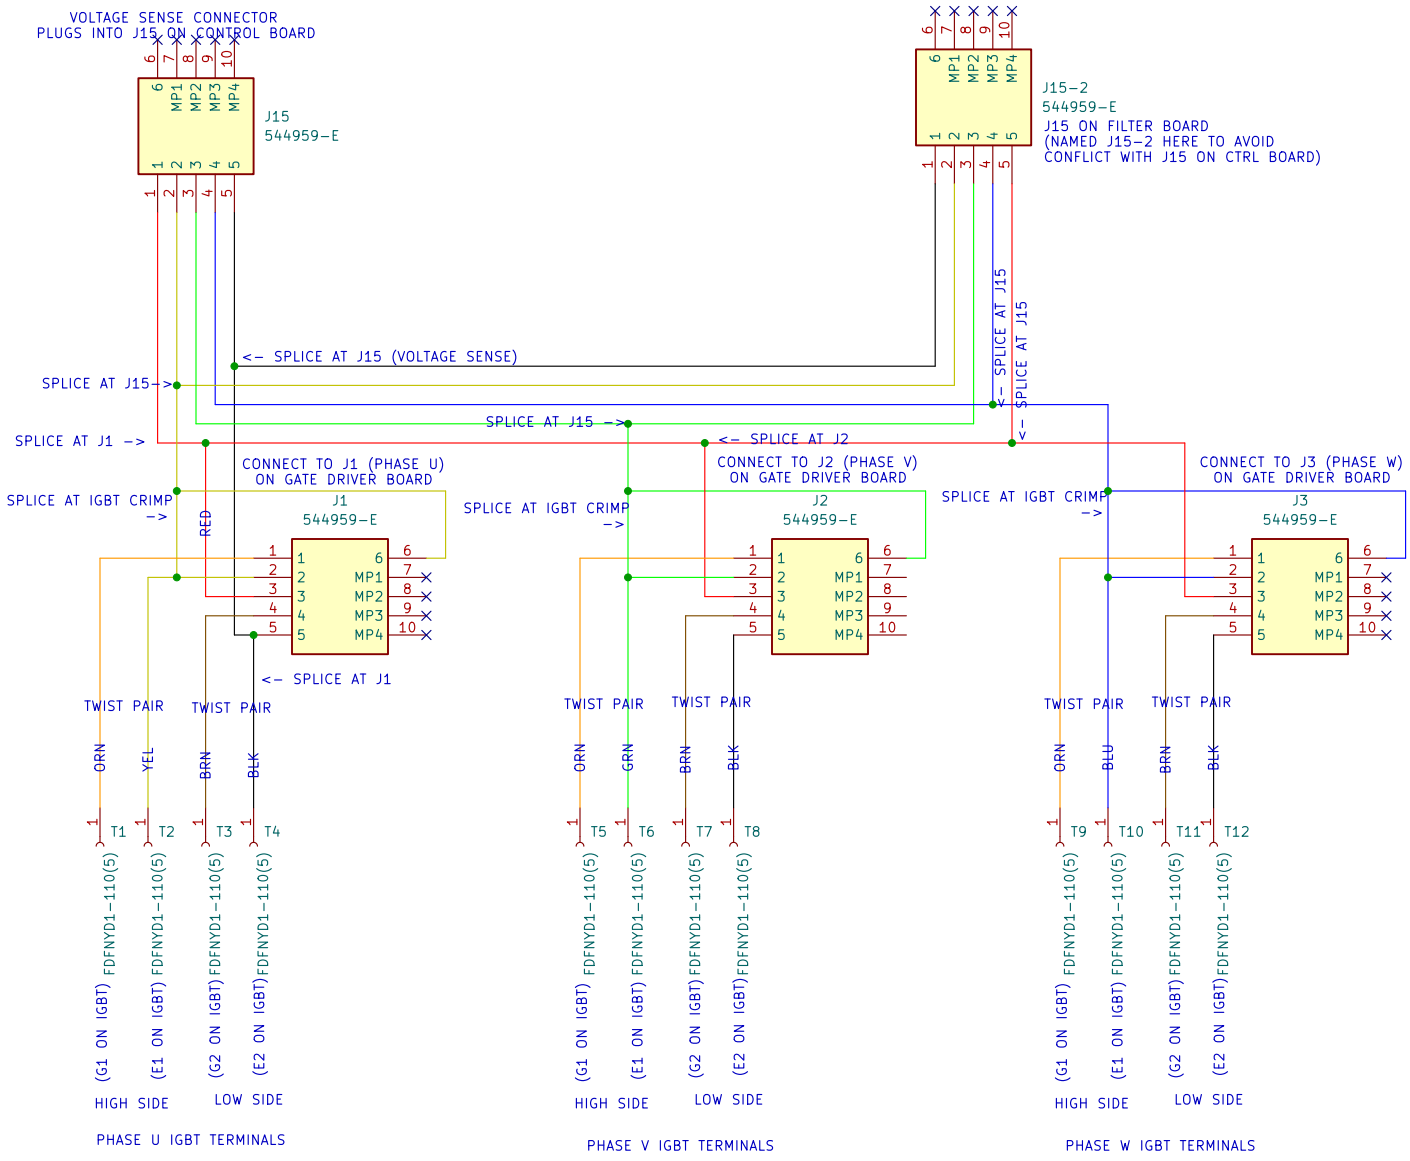


Wiring Harness Note

All harnesses shall be constructed using #22 AWG stranded conductor, 1kV rated, PVC insulated wire (or cross-linked polyolefin where higher temperature rating is required). Conductors shall be color-coded per MIL-STD-681D (see chart below). Terminations shall be crimped using approved tooling with pull-test verification per IPC/WHMA-A-620, Chapter 19. Harnesses shall be bundled with lacing cord or expandable braided sleeving; tie-wraps are acceptable only in non-vibration environments per drawing callout. All harnesses require 100% continuity and 500V DC hipot testing prior to release. RoHS compliance required unless otherwise specified.

COLOR CODE CHART (MIL-STD-681D)

Cond#	Color	Abbr
0	Black	BLK
1	Brown	BRN
2	Red	RED
3	Orange	ORG
4	Yellow	YEL
5	Green	GRN
6	Blue	BLU
7	Violet	VIO
8	Gray	GRY
9	White	WHT

PIN CRIMPS FOR CONNECTORS

PLACEHOLDER FOR BOM PIN1 464762-E
PLACEHOLDER FOR BOM PIN2 464762-E
PLACEHOLDER FOR BOM PIN3 464762-E
PLACEHOLDER FOR BOM PIN4 464762-E
PLACEHOLDER FOR BOM PIN5 464762-E
PLACEHOLDER FOR BOM PIN6 464762-E
PLACEHOLDER FOR BOM PIN7 464762-E
PLACEHOLDER FOR BOM PIN8 464762-E
PLACEHOLDER FOR BOM PIN9 464762-E
PLACEHOLDER FOR BOM PIN10 464762-E
PLACEHOLDER FOR BOM PIN11 464762-E
PLACEHOLDER FOR BOM PIN12 464762-E
PLACEHOLDER FOR BOM PIN13 464762-E
PLACEHOLDER FOR BOM PIN14 464762-E
PLACEHOLDER FOR BOM PIN15 464762-E
PLACEHOLDER FOR BOM PIN16 464762-E
PLACEHOLDER FOR BOM PIN17 464762-E
PLACEHOLDER FOR BOM PIN18 464762-E
PLACEHOLDER FOR BOM PIN19 464762-E
PLACEHOLDER FOR BOM PIN20 464762-E
PLACEHOLDER FOR BOM PIN21 464762-E
PLACEHOLDER FOR BOM PIN22 464762-E
PLACEHOLDER FOR BOM PIN23 464762-E
PLACEHOLDER FOR BOM PIN24 464762-E
PLACEHOLDER FOR BOM PIN25 464762-E

HW-C2-WH-GVDS
Prepared by Thomas Liao
Corzine Lab, University of California, Santa Cruz
Sheet: /
File: GDVSHarness.kicad_sch

Title: Open Inverter Platform – Gate Drive Wiring Harness

Size: USLetter | Date: 2026-07-16 | **Rev: A**
KiCad E.D.A. 10.0.3 | Id: 1/1