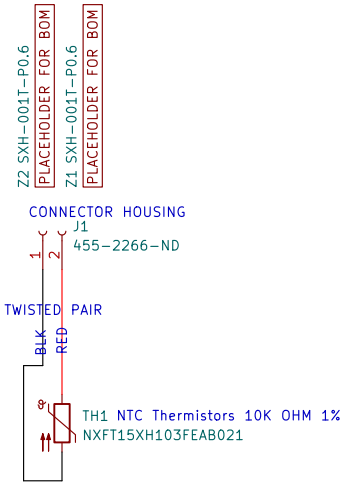

NOTE:
THERMISTOR SHOULD BE SECURELY PLACED INSIDE DC LINK CAPACITOR MODULE BETWEEN CAPACITORS AND ADHERED WITH THERMALLY CONDUCTIVE MATERIAL.

NOTE:
WHEN ASSEMBLING, USE HEAT-SHRINK TUBING AROUND THERMISTOR LEADS, AND ENSURE ELECTRICAL ISOLATION IS MAINTAINED BETWEN THERMISTOR AND DC LINK

Wiring Harness Note

All harnesses shall be constructed using #22 AWG stranded conductor, 1kV rated, PVC insulated wire (or cross-linked polyolefin where higher temperature rating is required).
Conductors shall be color-coded per MIL-STD-681D (see chart below). Terminations shall be crimped using approved tooling with pull-test verification per IPC/WHMA-A-620, Chapter 19.
Harnesses shall be bundled with lacing cord or expandable braided sleeving; tie-wraps are acceptable only in non-vibration environments per drawing callout.
All harnesses require 100% continuity and 500V DC hipot testing prior to release. RoHS compliance required unless otherwise specified.

COLOR CODE CHART (MIL-STD-681D)

Cond#	Color	Abbr
0	Black	BLK
1	Brown	BRN
2	Red	RED
3	Orange	ORG
4	Yellow	YEL
5	Green	GRN
6	Blue	BLU
7	Violet	VIO
8	Gray	GRY
9	White	WHT

HW-C2-WH-TSBCM
Prepared by Thomas Liao
Corzine Lab, University of California, Santa Cruz
Sheet: /
File: CapacitorTempSenseHarness.kicad_sch

Title: Open Inverter Platform – Capacitor Temp Sense Wiring Harness

Size: USLetter | Date: 2026-07-16 | **Rev: A**
KiCad E.D.A. 10.0.3 | Id: 1/1