
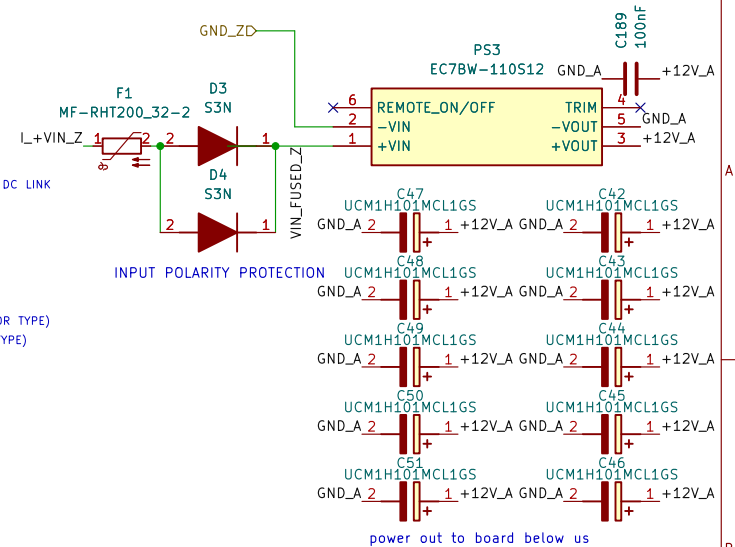




NOTE THIS IS NOT SEVCON PIN COMPATIBLE. DO NOT CONNEN THIS TO SEVCON
IT WILL BLOW UP

776231-1
J6

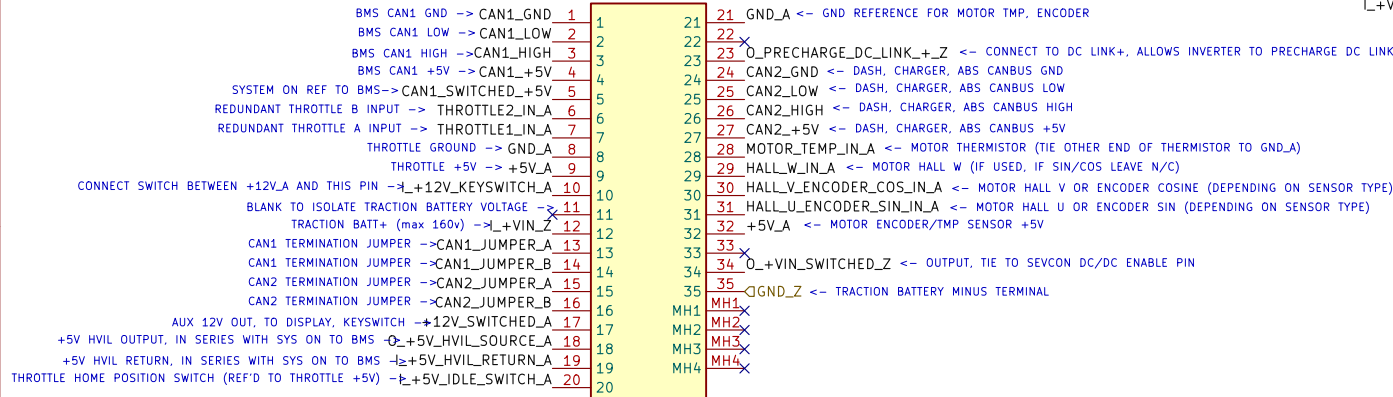


HVIL/BMS ENABLE CIRCUIT

THIS CIRCUIT HAS HVIL WIRED IN SERIES WITH BMS POWER, IF HVIL IS BROKEN, BMS ENTERS STANDBY AND OPENS CONTACTORS AUTOMATICALLY

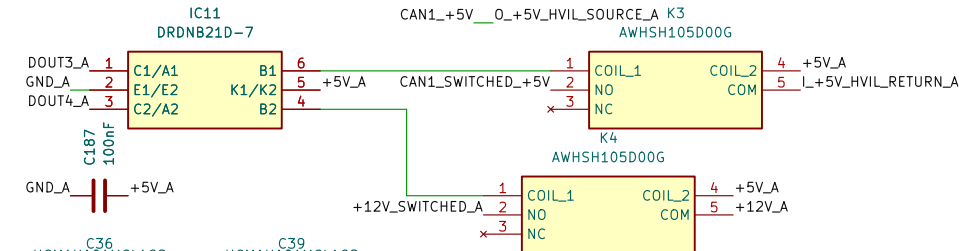


Connector to IO board

J12
Conn_02x08_Counter_Clockwise




Connector to IO board

J7
Conn_02x08_Counter_Clockwise

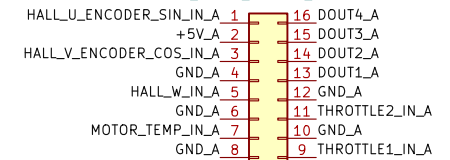


Connector to IO board

J13
Conn_02x03_Counter_Clockwise



J10
Conn_02x03_Counter_Clockwise




passthrough, leave above board below, we can simply add a female to male header with long pins here to make probing easier

SINGLE WIRE DEBUG / PROGRAMMING

J14
Conn_01x10



PRECHARGE CIRCUIT

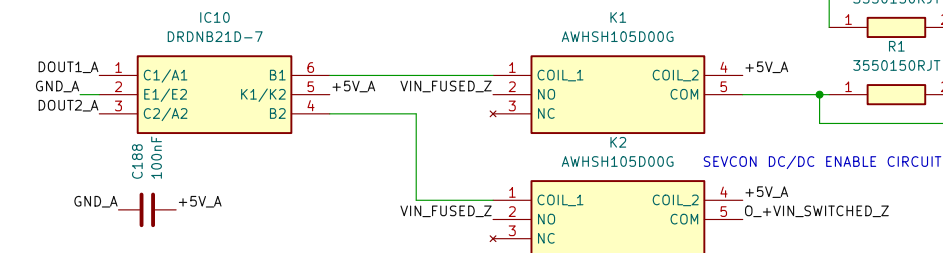

O_PRECHARGE_DC_LINK_+_Z

Sheet: /
File: MainBoard.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.3

Date:

Rev:

Id: 1/1