

CONTINUOUS BEAD OF URETHANE SEALANT  
 APPROPRIATE FIRESTONE FASTENER  
 12" (304.8mm) O.C. MAX.

CONTINUOUS BEAD OF URETHANE SEALANT  
 APPROPRIATE FIRESTONE FASTENER  
 12" (304.8mm) O.C. MAX.

REGLET FLASHING

FIRESTONE APPROVED  
 UNDERLAYMENT

HEADWALL FLASHING

TURN UP LEG AND SEAL  
 w/ URETHANE SEALANT

ZEE CLOSURE SET IN 3/16" x 7/8"  
 (4.8 mm x 63.5 mm) DOUBLE BEADED  
 BUTYL TAPE, FILL SPACE BETWEEN ZEE  
 AND PANEL SEAM w/ URETHANE SEALANT

**MASONRY AND CONCRETE  
 WALLS / CURBS MUST BE  
 WATERPROOFED AND  
 MAINTAINED IN ORDER  
 FOR ANY SURFACE  
 MOUNTED TERMINATION  
 TO BE EFFECTIVE.**

FIRESTONE INSULATION  
 (OPTIONAL)


SUBSTRATE

WALL / CURB  
 (MASONRY /  
 CONCRETE  
 SUBSTRATE  
 ONLY)

APPROPRIATE FIRESTONE  
 ANCHORING FASTENER

#### NOTES:

1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO TECHNICAL INFORMATION SHEETS FOR FASCIA SIZES, ACCESSORIES, AND FINISHES AVAILABLE.
3. REFER TO THE FIRESTONE TECHNICAL DATABASE FOR FASTENER COMPATIBILITY WITH METAL.
4. FIELD NOTCH ZEE CLOSURES. SET ZEE CLOSURE IN BUTYL TAPE AND SEAL AROUND REMAINING EDGES OF ZEE WITH URETHANE SEALANT.
5. APPLICATION DETAILS ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE APPROPRIATE FOR ALL BUILDING DESIGNS AND CONDITIONS.

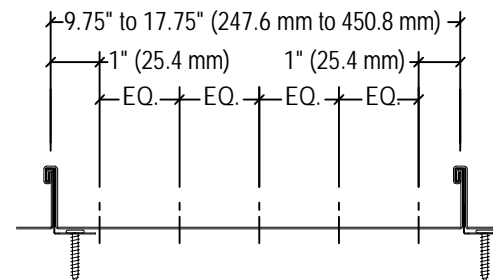

FASTENER SEQUENCE  
 FASTENER SPACING NOT TO EXCEED 4" (101.6 mm)

ANCHORING FASTENER PATTERN

FOR WARRANTY PERIODS GREATER THAN  
 20 YEARS REFER TO METAL QUICK SPECS  
 FOR MINIMUM REQUIREMENTS.

MAXIMUM WARRANTY: 20 YEARS

**Firestone**  
 BUILDING PRODUCTS  
 NOBODY COVERS YOU BETTER.™  
[www.firestonebpco.com](http://www.firestonebpco.com)

FIXED HEADWALL WITH Z-CLOSURE AT REGLET

UNA-CLAD®

ACCEPTABLE SYSTEMS: UC-4 RS

ISSUE / REVISION  
 DATE:

08/29/2013

NOT TO SCALE

DETAIL NO.

4-HW-1