


VENTED PARTS ARE ONLY AVAILABLE IN ANOKA DUE TO VENTING  
(PREFERRED TO BE ALUMINUM TO PREVENT PREMATURE RUSTING)

#### NOTES:

1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO TECHNICAL INFORMATION SHEETS FOR FASCIA SIZES, ACCESSORIES, AND FINISHES AVAILABLE.
3. REFER TO THE FIRESTONE TECHNICAL DATABASE FOR FASTENER/METAL COMPATIBILITY.
4. FIELD NOTCH ZEE CLOSURES. SET ZEE CLOSURE IN BUTYL TAPE AND SEAL AROUND REMAINING EDGES OF ZEE WITH URETHANE SEALANT.
5. APPLICATION DETAILS ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE APPROPRIATE FOR ALL BUILDING DESIGNS AND CONDITIONS.

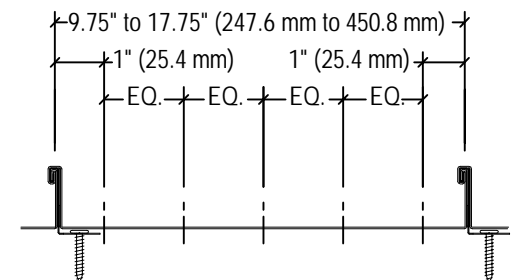

FASTENER SEQUENCE  
FASTENER SPACING NOT TO EXCEED 4" (101.6 mm)

ANCHORING FASTENER PATTERN

FOR WARRANTY PERIODS GREATER THAN  
20 YEARS REFER TO METAL QUICK SPECS  
FOR MINIMUM REQUIREMENTS.

MAXIMUM WARRANTY: **20 YEARS**

**Firestone**  
BUILDING PRODUCTS  
NOBODY COVERS YOU BETTER.™  
[www.firestonebpco.com](http://www.firestonebpco.com)

### VENTED FIXED RIDGE WITH Z-CLOSURE

UNA-CLAD®

ACCEPTABLE SYSTEMS: UC-4 RS

ISSUE / REVISION  
DATE:

08/30/2013

NOT TO SCALE

DETAIL NO.

**4-R-5**