

ZEE CLOSURE SET IN 3/16" x 7/8"
(5 mm x 22 mm) DOUBLE BEADED
BUTYL TAPE, FILL SPACE BETWEEN
ZEE & PANEL SEAM w/ URETHANE
SEALANT

APPROPRIATE FIRESTONE
ANCHORING FASTENER

APPROPRIATE FIRESTONE
FASTENER; 24" (610 mm)
O.C. MAX.


FIRESTONE APPROVED
UNDERLAYMENT

HIGH EAVE FLASHING

WOOD NAILER


HIGH EAVE CLEAT

APPROPRIATE FIRESTONE
FASTENER: 8" (203 mm)
O.C. MAX.

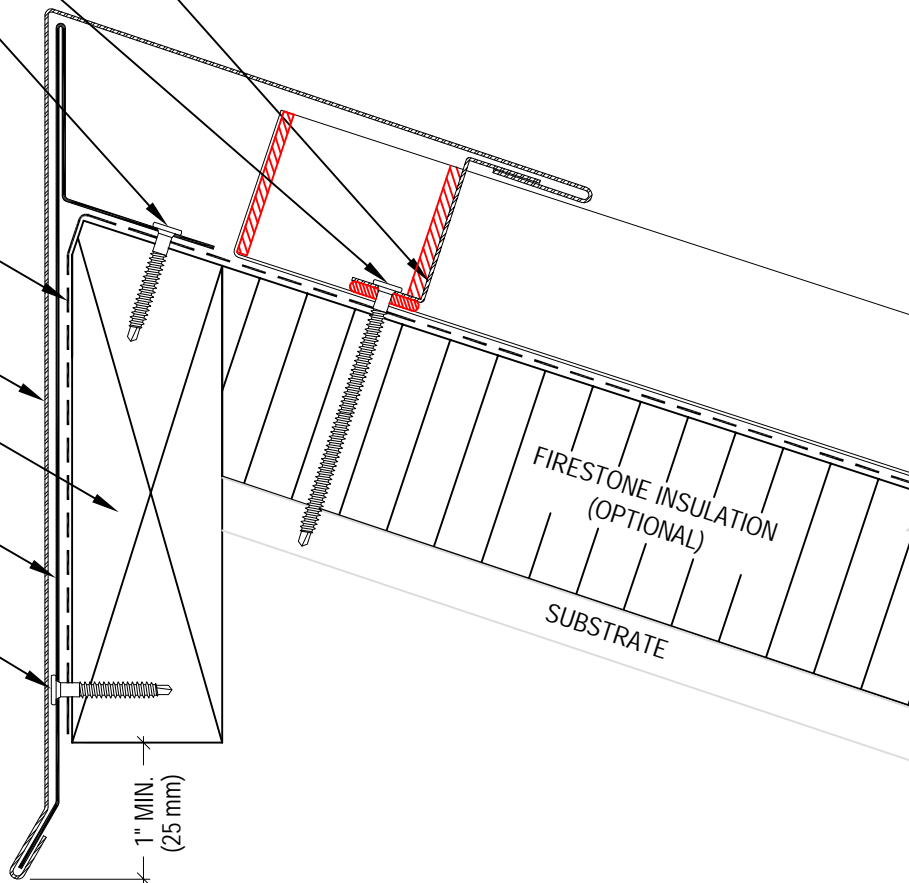

NOTES:

1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
2. REFER TO TECHNICAL INFORMATION SHEETS FOR FASCIA SIZES, ACCESSORIES, AND FINISHES AVAILABLE.
3. WOOD NAILER MUST BE INSTALLED TO MEET APPLICABLE BUILDING CODES OR 200 LBS PER LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
4. REFER TO THE FIRESTONE TECHNICAL DATABASE FOR FASTENER COMPATIBILITY WITH METAL.
5. APPLICATION DETAILS ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE APPROPRIATE FOR ALL BUILDING DESIGNS AND CONDITIONS.

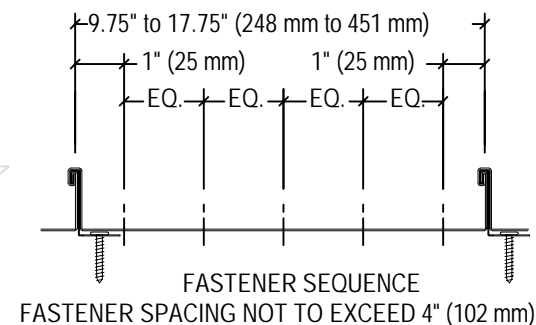

ANCHORING FASTENER PATTERN

FOR WARRANTY PERIODS GREATER THAN
20 YEARS REFER TO METAL QUICK SPECS
FOR MINIMUM REQUIREMENTS.

MAXIMUM WARRANTY: 20 YEARS

Firestone
BUILDING PRODUCTS
NOBODY COVERS YOU BETTER.™
www.firestonebpco.com

FIXED HIGH EAVE WITH Z-CLOSURE

UNA-CLAD®

ACCEPTABLE SYSTEMS: UC-4 RS

ISSUE / REVISION
DATE:

08/29/2013

NOT TO SCALE

DETAIL NO.

4-HE-1