


ASPHALT IS APPLIED UNIFORMLY TO EACH
PLY AT A RATE OF APPROXIMATELY 25 LBS
PER 100 SQ/FT OF ROOF SURFACE (±15%)

- NOTES:
- 1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION AT www.firestonebpco.com.
 - 2. REFER TO DETAILS MB-LS-1, MB-LS-2 & MB-LS-3 FOR APPROPRIATE LAP SEALING OPTIONS.

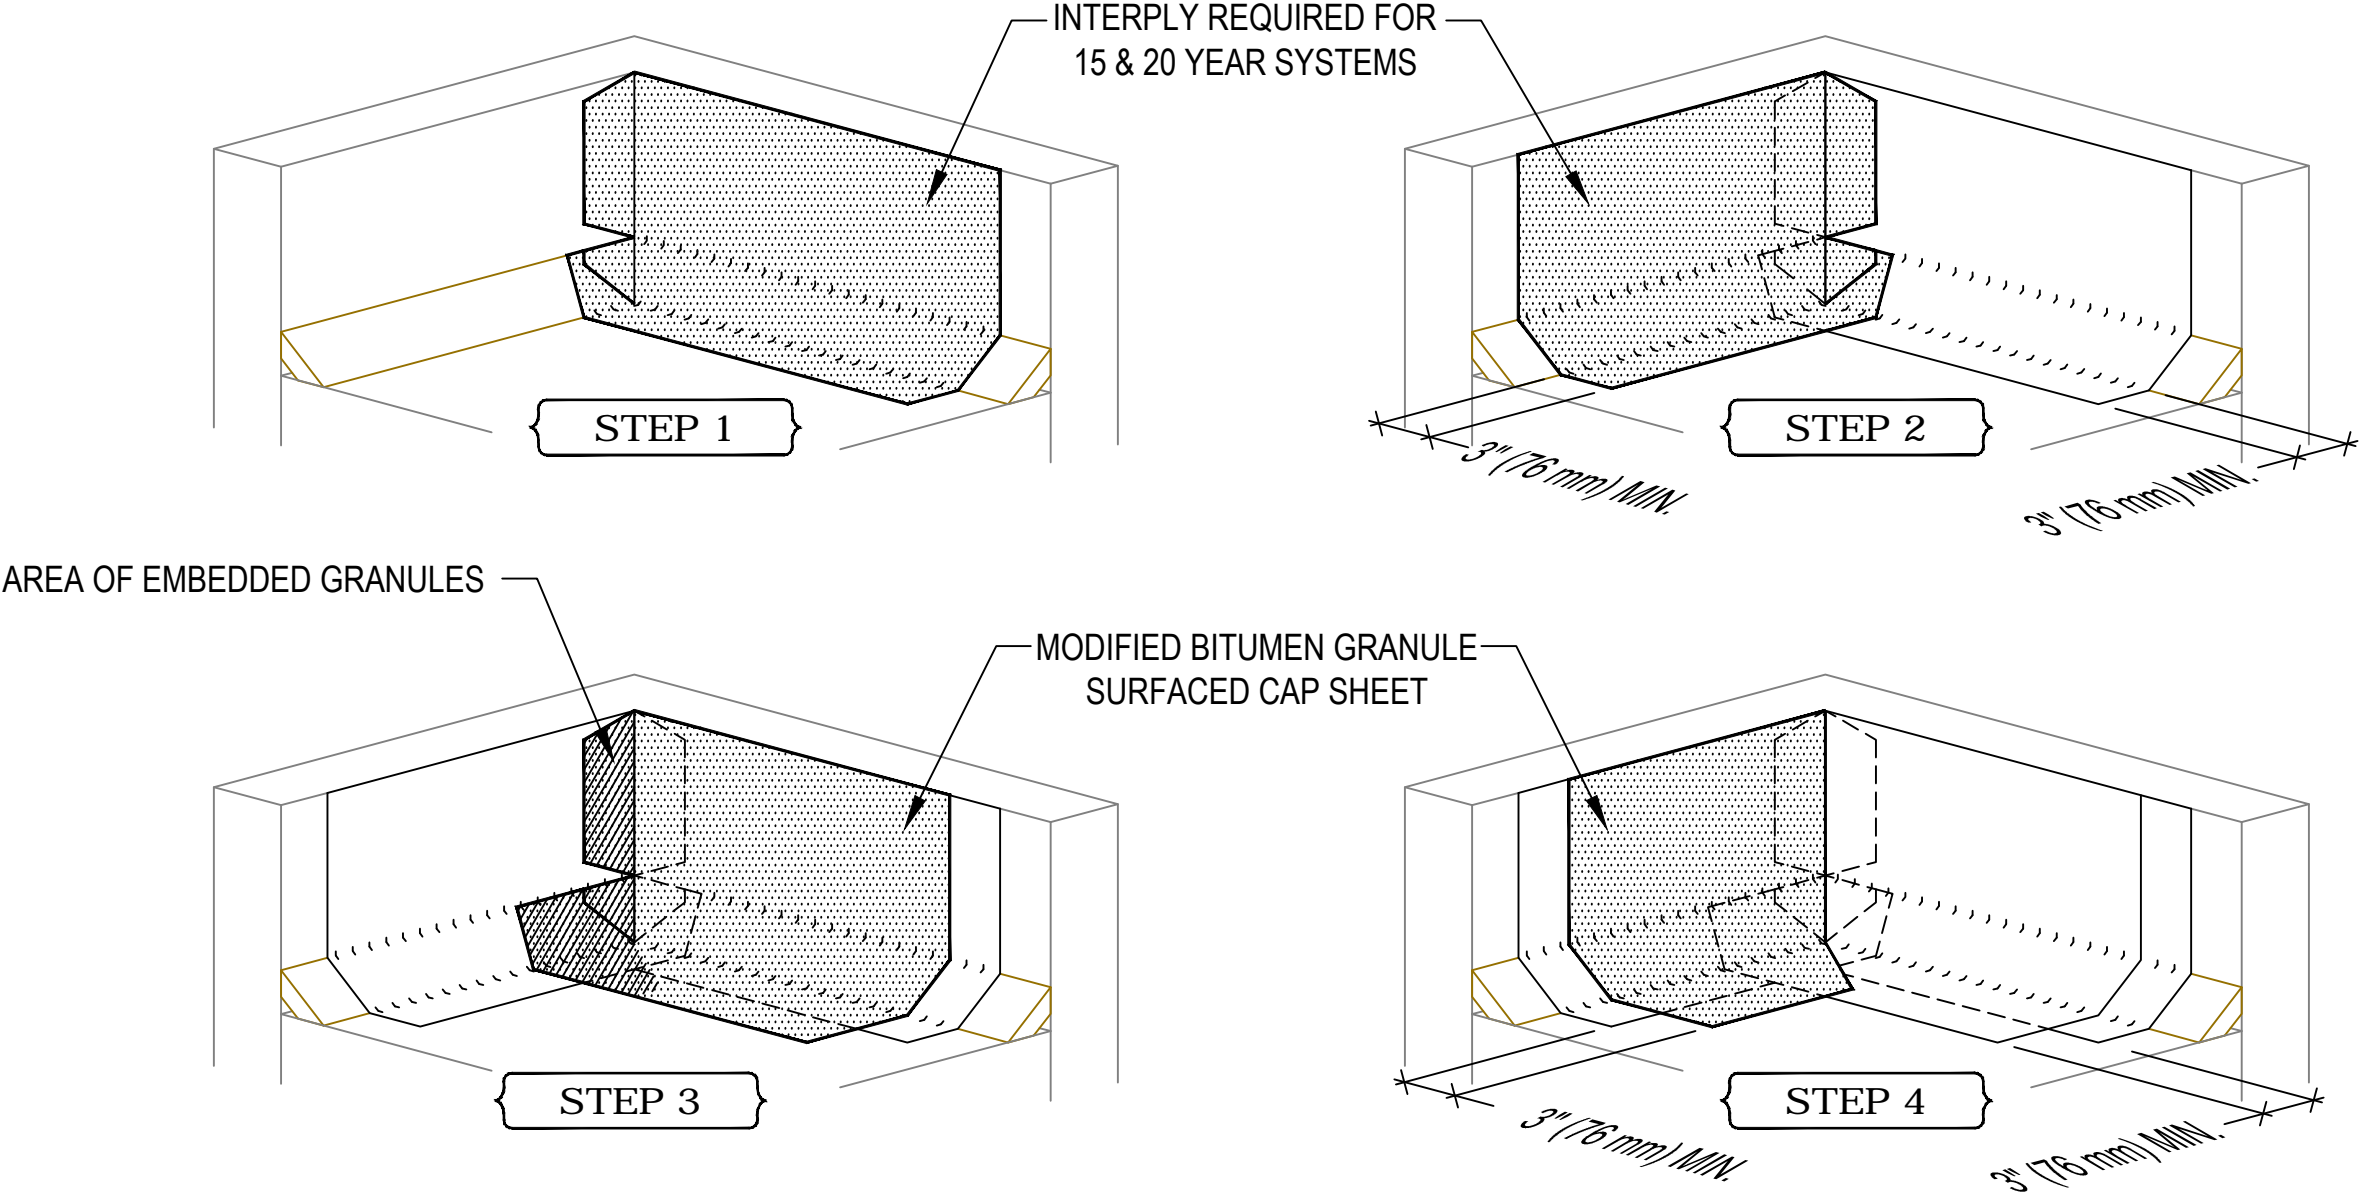

MAXIMUM WARRANTY: 20 YEARS

Firestone
BUILDING PRODUCTS
NOBODY COVERS YOU BETTER.™
www.firestonebpco.com

INSIDE CORNER

ASPHALT SYSTEMS

ACCEPTABLE SYSTEMS: BUR

ISSUE/REVISION
DATE:

01/17/2014

NOT TO SCALE

DETAIL NO.

BU-C-2