


**ASPHALT IS APPLIED UNIFORMLY TO EACH PLY AT A RATE OF APPROXIMATELY 25 LBS PER 100 SQ/FT OF ROOF SURFACE (±15%)**

**NOTES:**

1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
2. ALL SHEET METAL TO BE INSTALLED PER SMACNA GUIDELINES.
3. GRANULES MUST BE EMBEDDED WHEN USING TORCH APPLIED GRANULE SURFACED CAP SHEETS PRIOR TO COMPLETING SIDE LAPS, END LAPS, AND BASE FLASHING LAPS.
4. ATTACH NAILER TO DECK WITH SUITABLE FASTENER.

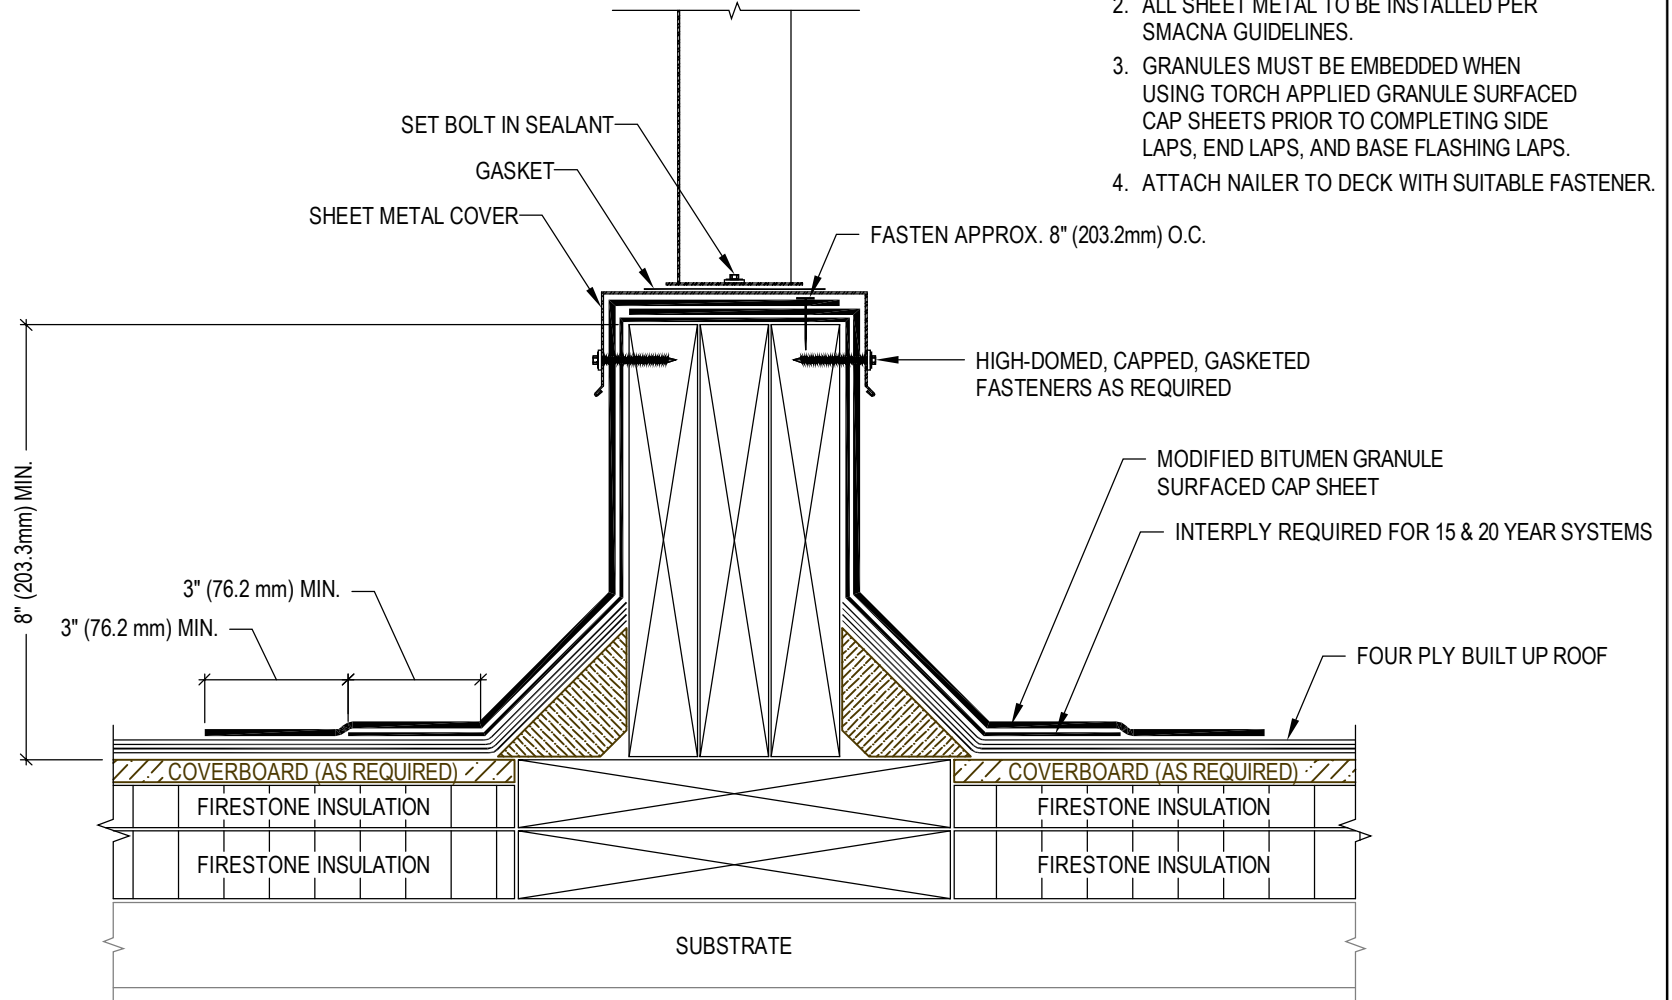

**MAXIMUM WARRANTY: 20 YEARS**

**Firestone**  
BUILDING PRODUCTS  
**NOBODY COVERS YOU BETTER.™**  
[www.firestonebpco.com](http://www.firestonebpco.com)

**EQUIPMENT SUPPORT CURB**

**ASPHALT SYSTEMS**

ACCEPTABLE SYSTEMS: BUR

ISSUE/REVISION  
DATE:  
1/1/2006

NOT TO SCALE

DETAIL NO.  
**BU-M-1**