


ASPHALT IS APPLIED UNIFORMLY TO EACH
PLY AT A RATE OF APPROXIMATELY 25 LBS
PER 100 SQ/FT OF ROOF SURFACE (±15%)

NOTES:

1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION
2. REFER TO DETAILS MB-LS-1, MB-LS-2, & MB-LS-3 APPROPRIATE LAP SEALING APPLICATIONS.

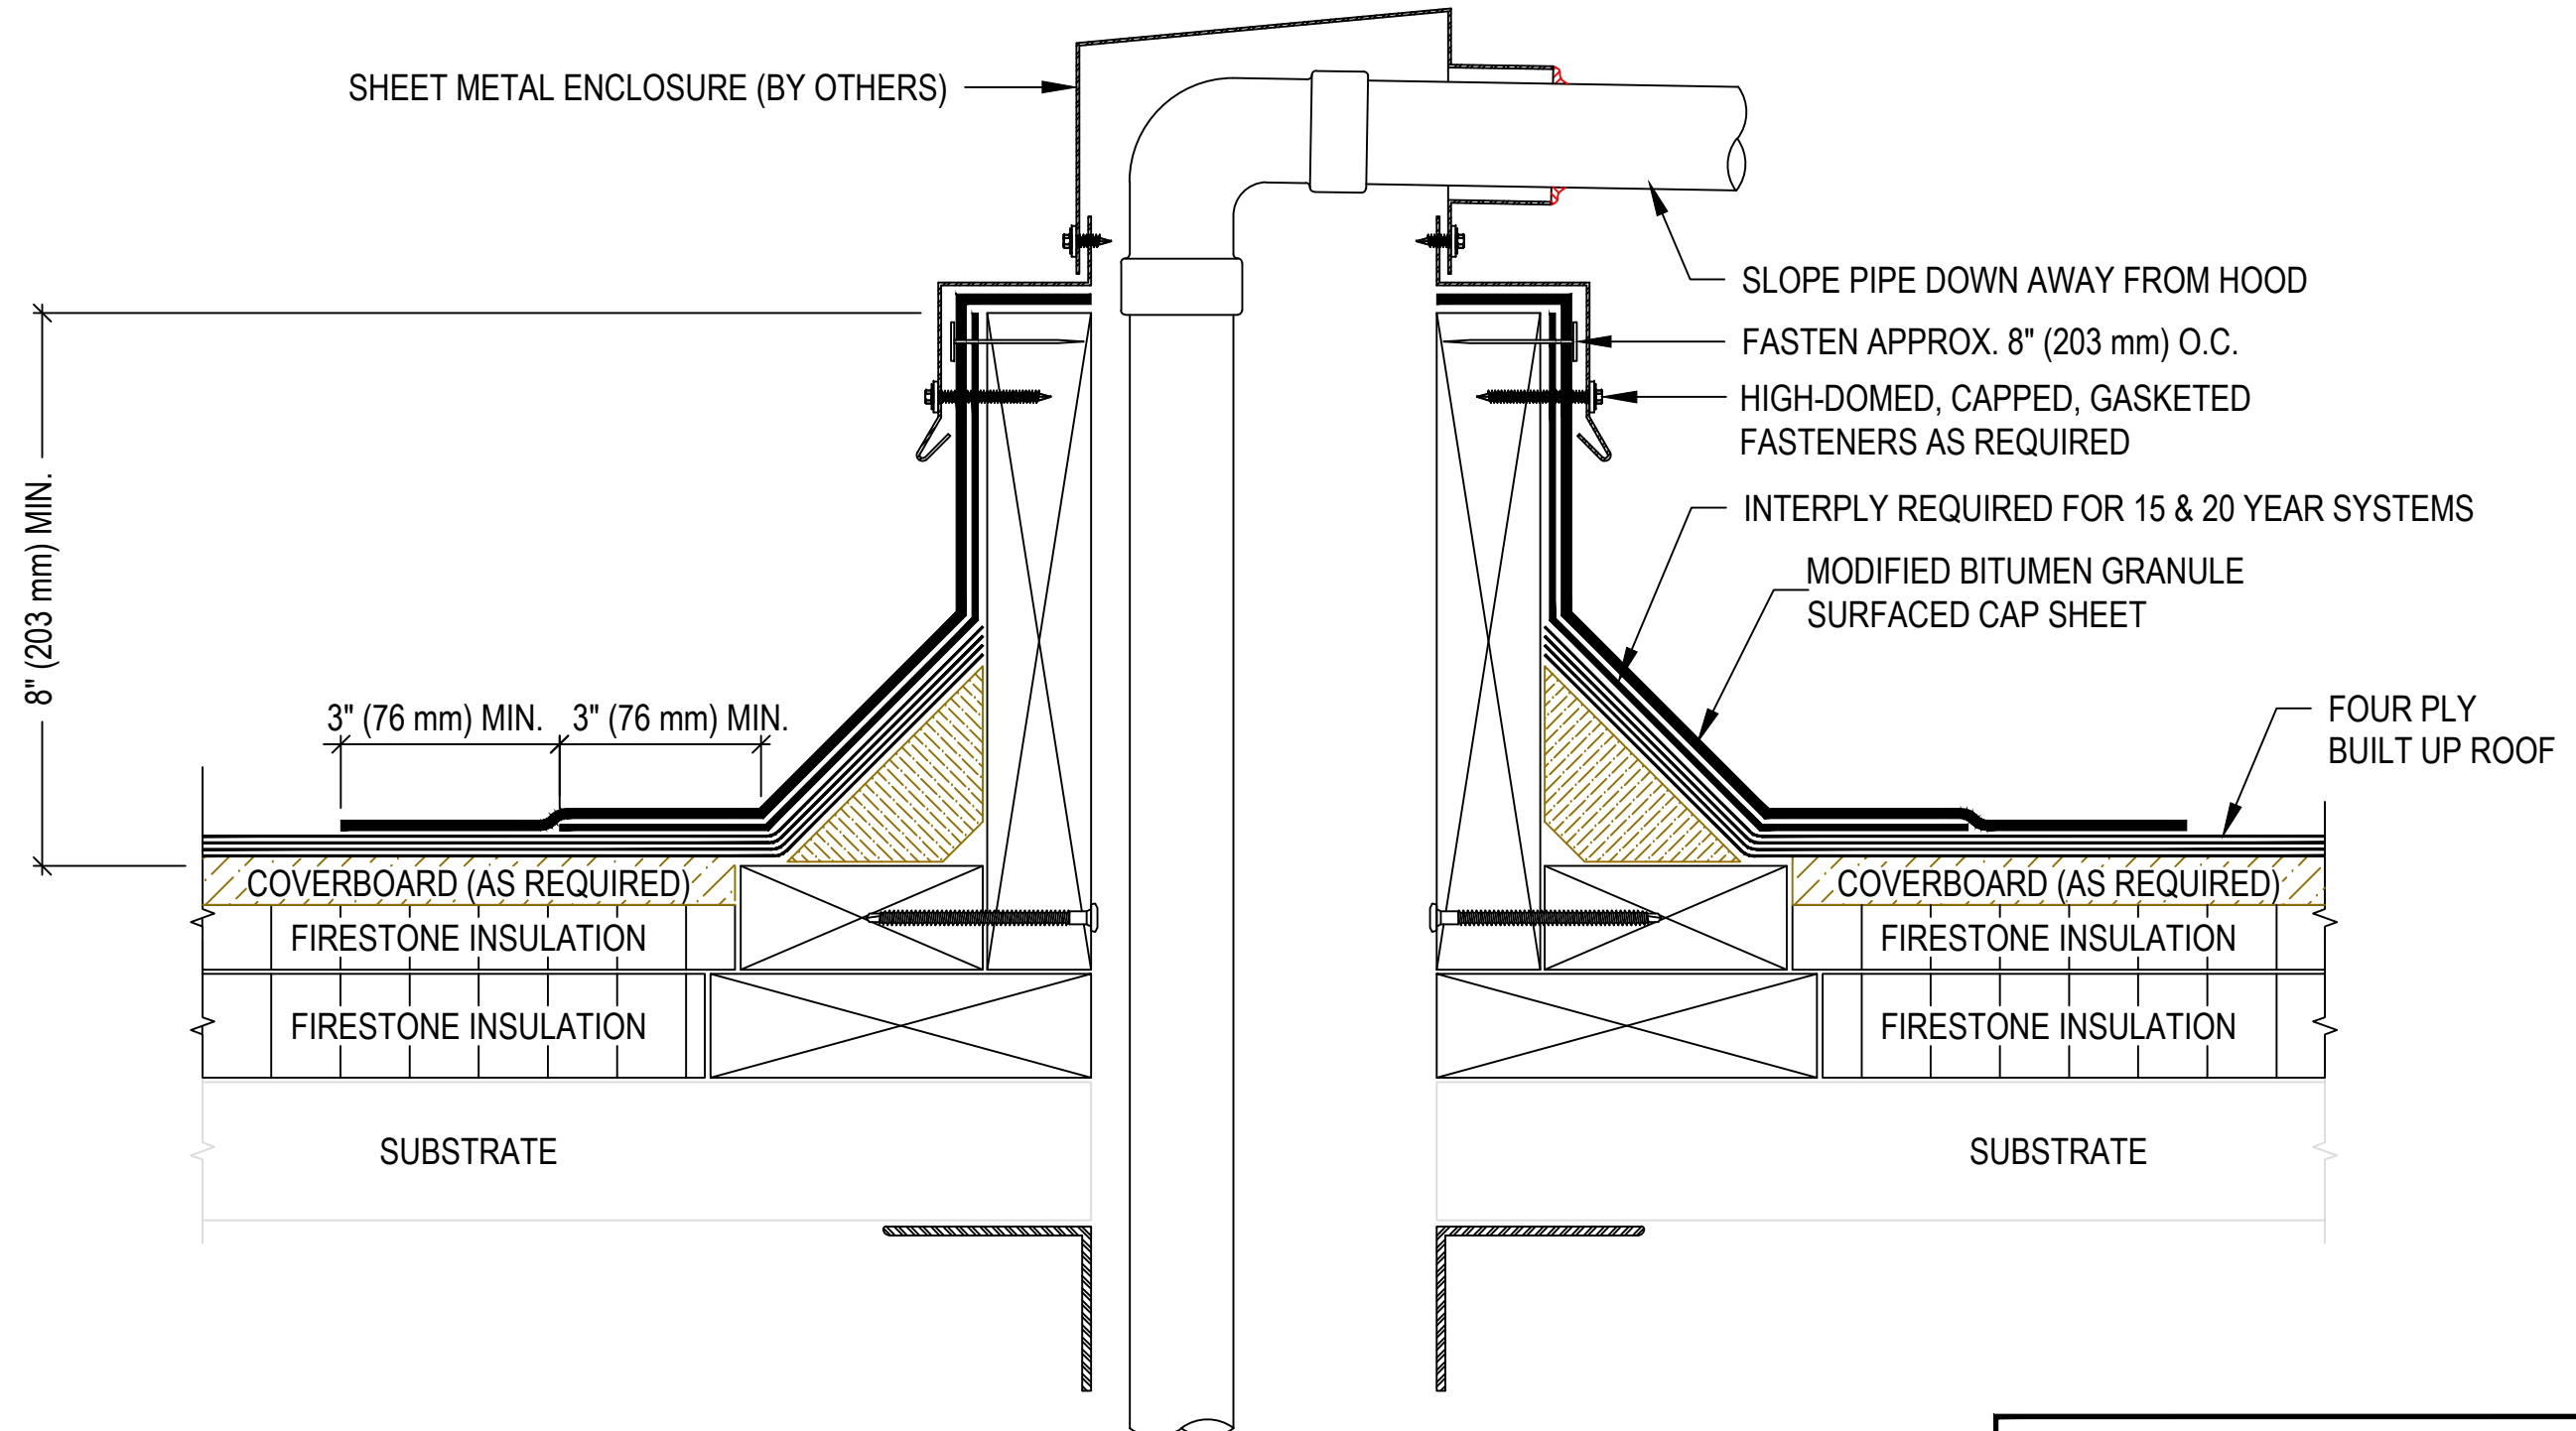

MAXIMUM WARRANTY: 20 YEARS

Firestone
BUILDING PRODUCTS
NOBODY COVERS YOU BETTER.™
www.firestonebpco.com

SHEET METAL ENCLOSURE FOR PIPING
THROUGH ROOF DECK

ASPHALT SYSTEMS

ACCEPTABLE SYSTEMS: BUR

ISSUE / REVISION
DATE:

01/17/2014

NOT TO SCALE

DETAIL NO.
BU-P-2