


MODIFIED BITUMEN GRANULE  
SURFACED FLASHING STRIP

INTERPLY REQUIRED FOR  
15 & 20 YEAR SYSTEMS


MULTI-PURPOSE  
MB FLASHING CEMENT

- NOTES:
- 1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION AT [firestonebpco.com](http://firestonebpco.com).
  - 2. REFER TO DETAILS MB-RE-10, MB-RE-11, OR MB-RE-12 FOR THE APPROPRIATE ATTACHMENT METHOD.

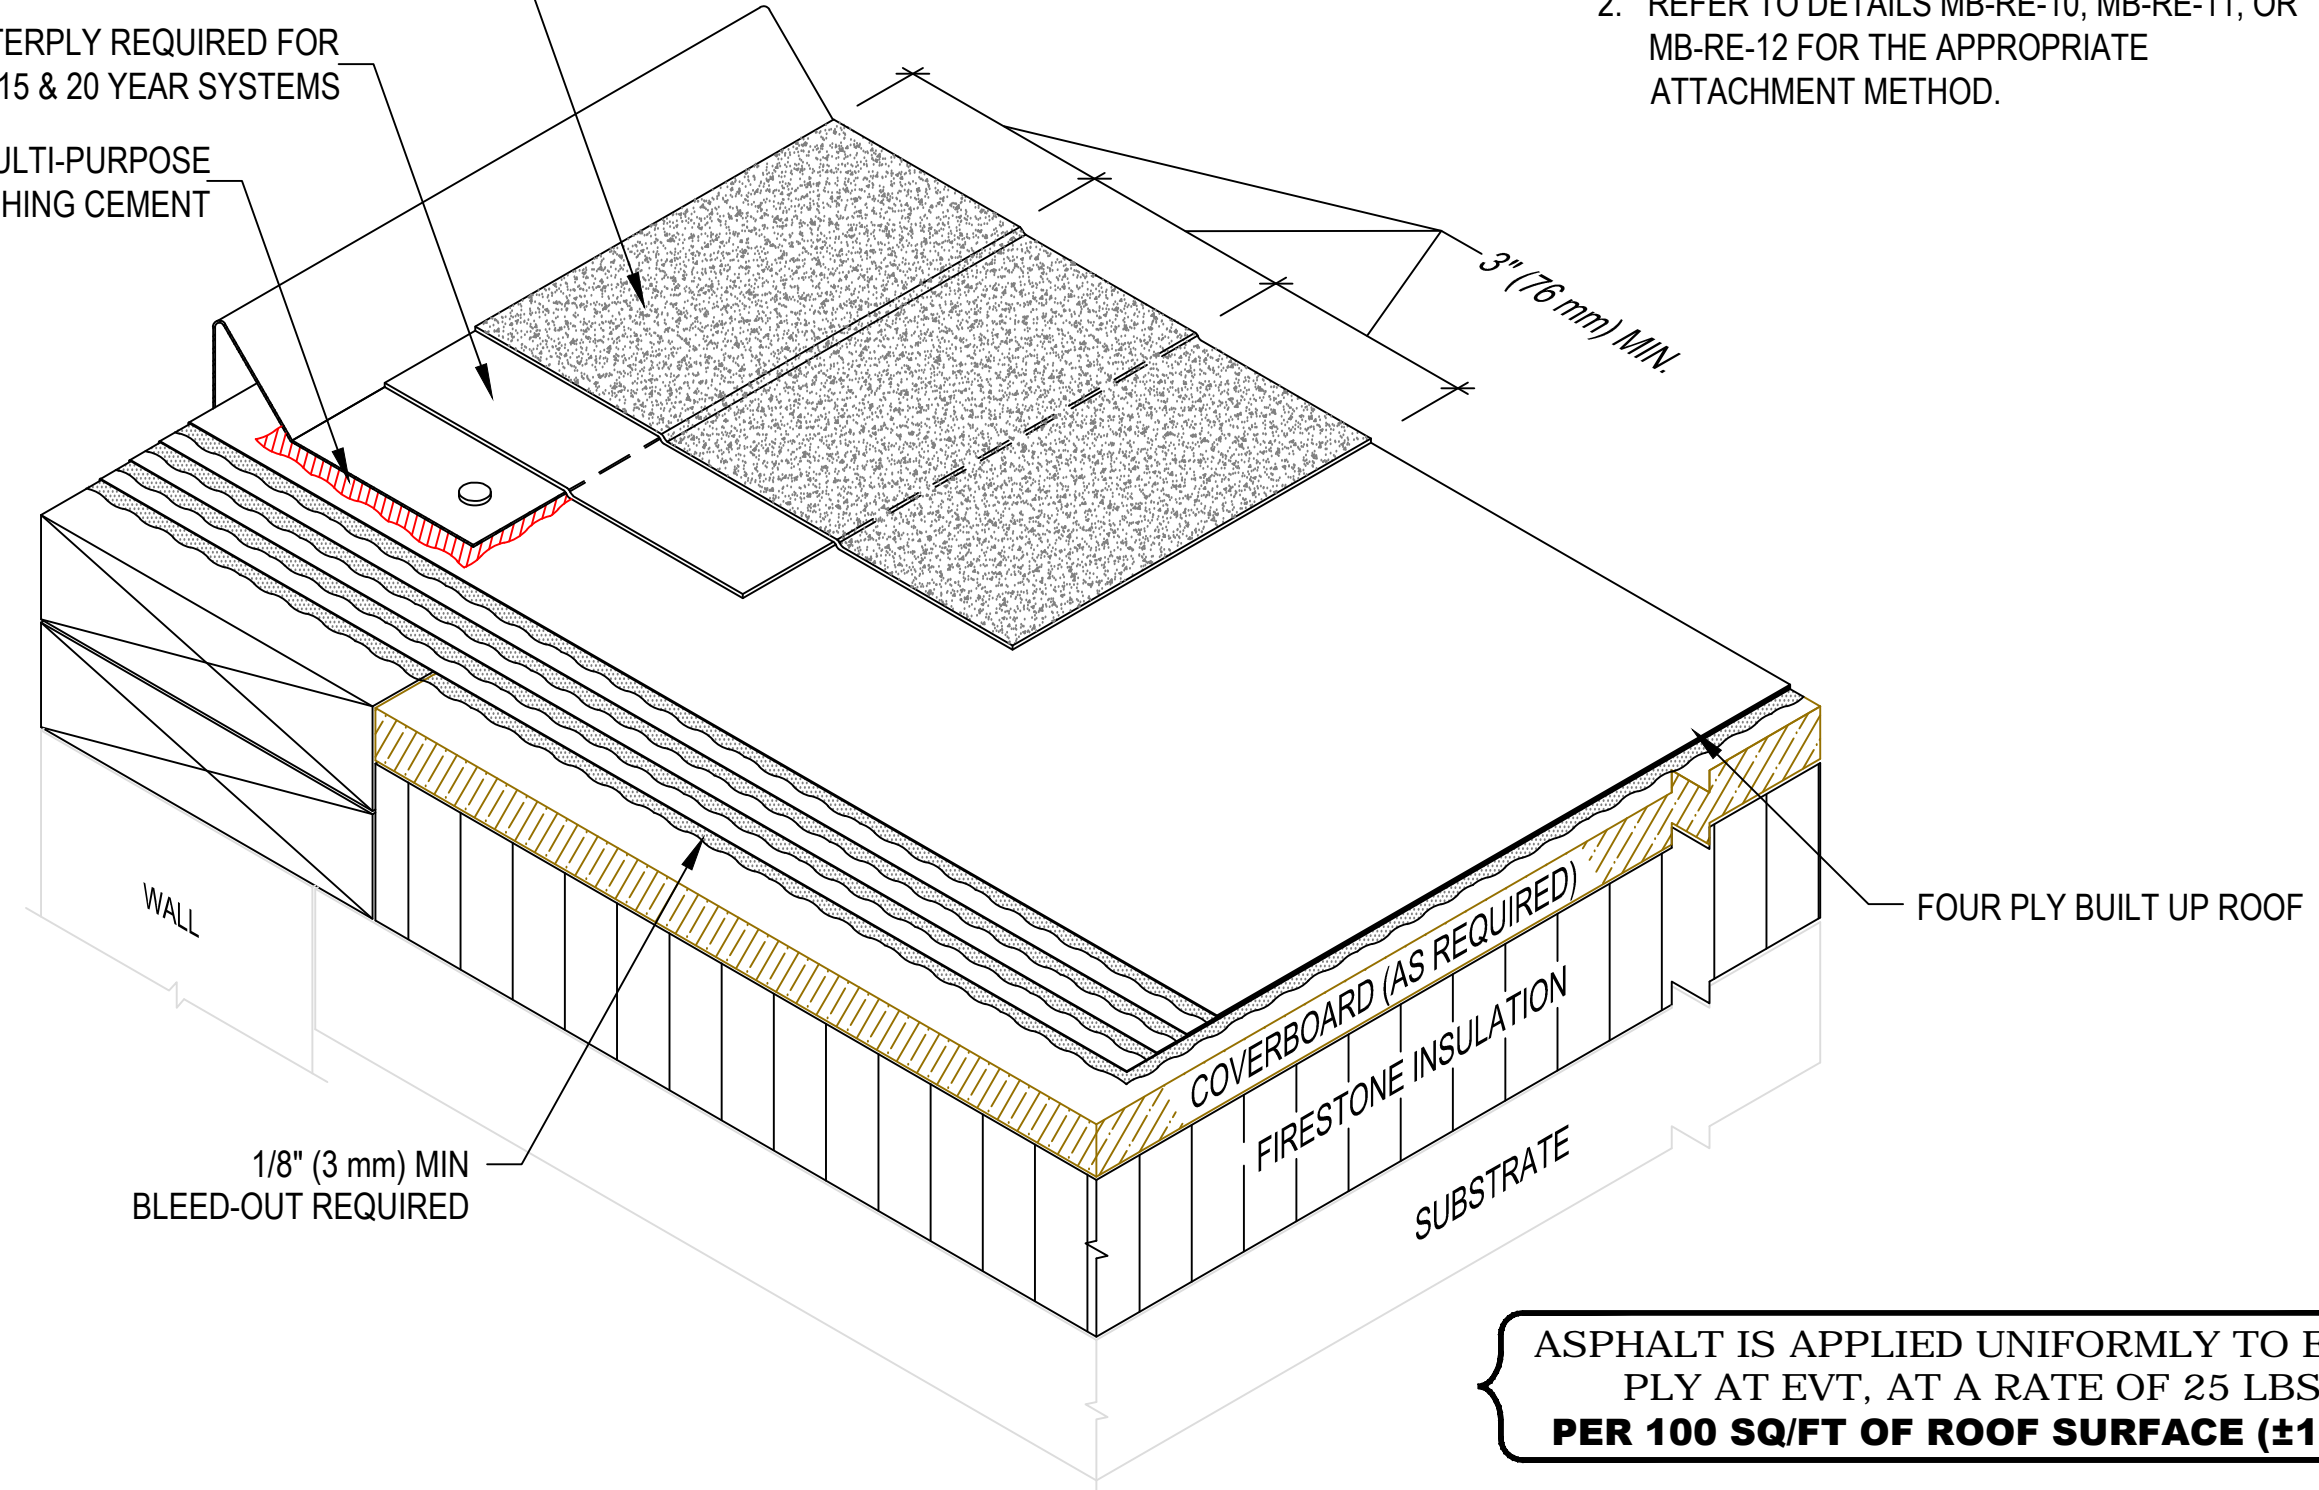

ASPHALT IS APPLIED UNIFORMLY TO EACH PLY AT EVT, AT A RATE OF 25 LBS PER 100 SQ/FT OF ROOF SURFACE (±15%)

MAXIMUM WARRANTY: 20 YEARS

 <p><b>Firestone</b> BUILDING PRODUCTS NOBODY COVERS YOU BETTER.™ <a href="http://www.firestonebpco.com">www.firestonebpco.com</a></p>	GRAVEL STOP EDGE USING STRIP FLASHING		ISSUE/REVISION DATE: 01/17/2014	DETAIL NO. <b>BU-RE-6</b>
	ASPHALT SYSTEMS	ACCEPTABLE SYSTEMS: BUR		
			NOT TO SCALE	