


ASPHALT IS APPLIED UNIFORMLY TO EACH PLY AT A RATE OF APPROXIMATELY 25 LBS PER 100 SQ/FT OF ROOF SURFACE (±15%)

- NOTES:
- 1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION
 - 2. REFER TO DETAILS MB-LS-1, MB-LS-2, & MB-LS-3 APPROPRIATE LAP SEALING APPLICATIONS.

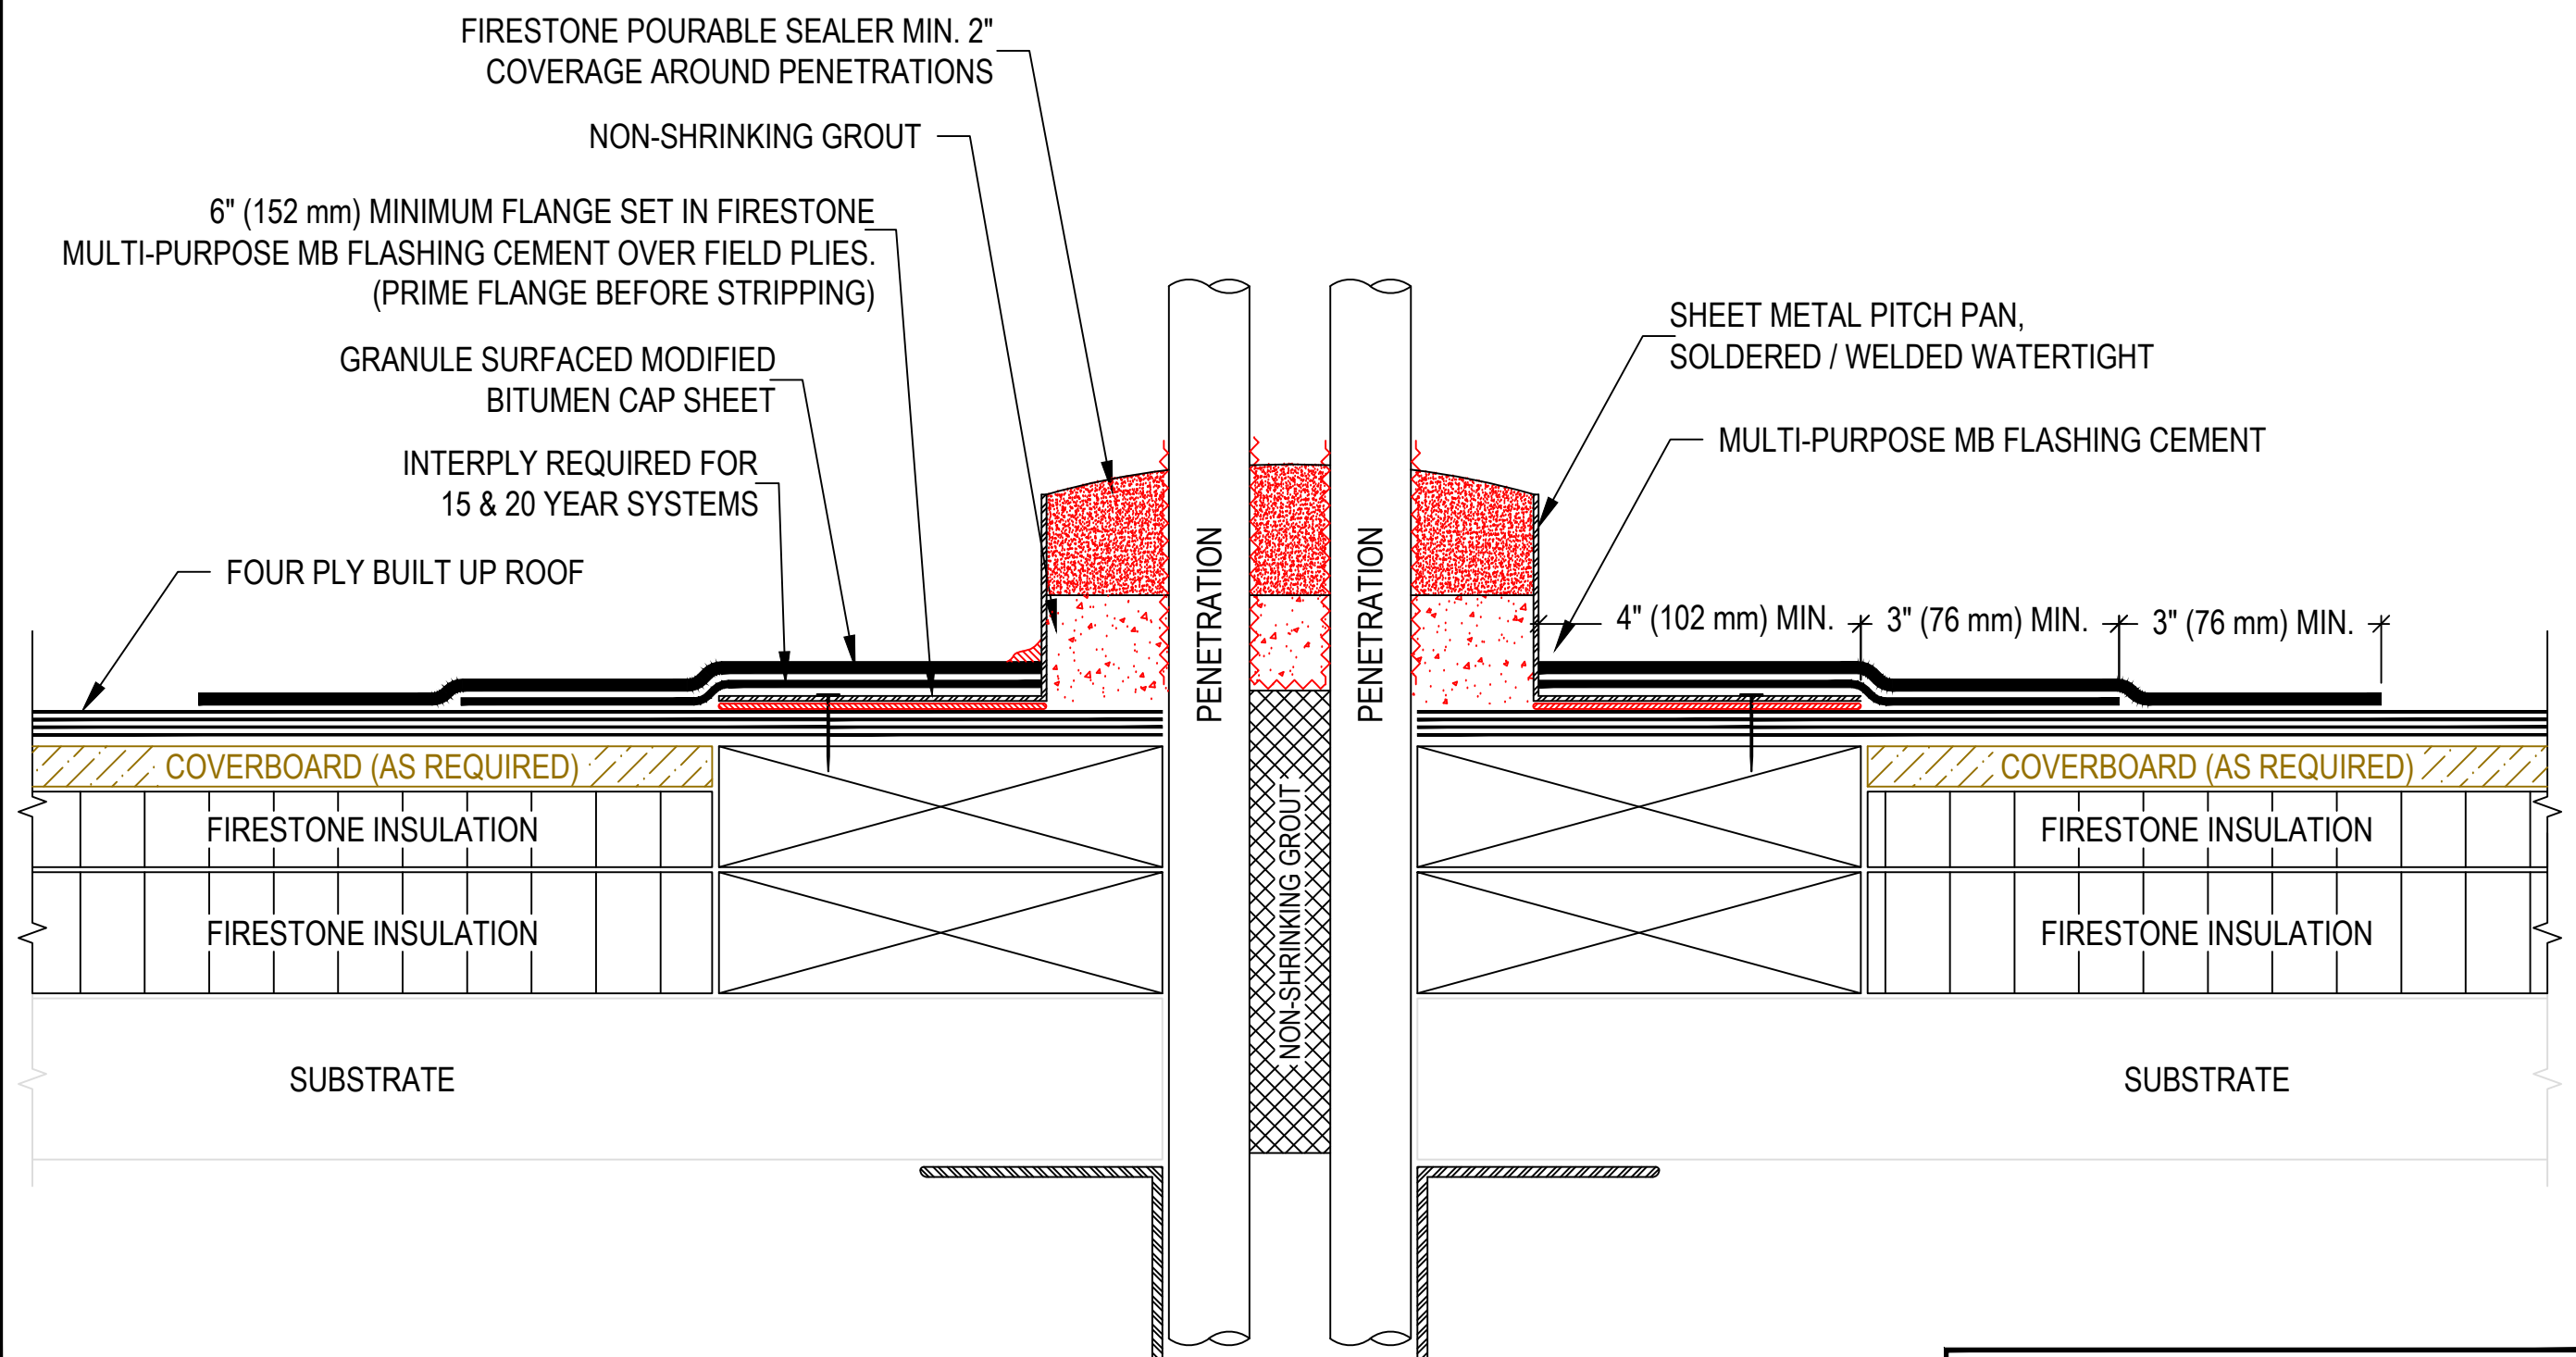

MAXIMUM WARRANTY: 20 YEARS

 Firestone BUILDING PRODUCTS NOBODY COVERS YOU BETTER.™ www.firestonebpco.com	PENETRATION POCKET		ISSUE/REVISION DATE: 01/17/2014	DETAIL NO. BU-P-4
	ASPHALT SYSTEMS	ACCEPTABLE SYSTEMS: BUR	NOT TO SCALE	