


ASPHALT IS APPLIED UNIFORMLY TO EACH
PLY AT A RATE OF APPROXIMATELY 25 LBS
PER 100 SQ/FT OF ROOF SURFACE (±15%)

NOTES:

1. REFER TO FIRESTONE WEBSITE FOR MOST
CURRENT INFORMATION AT www.firestonebpco.com.
2. REFER TO TECHNICAL INFORMATION SHEETS
FOR FASCIA SIZES, ACCESSORIES, AND FINISHES
AVAILABLE.
3. WOOD NAILER MUST BE INSTALLED TO MEET
APPLICABLE BUILDING CODES OR 200 LBS PER
LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
3. ATTACH WOOD NAILERS WITH SUITABLE FASTENERS.
4. ALL SHEET METAL IS TO BE INSTALLED PER SMACNA
GUIDELINES.

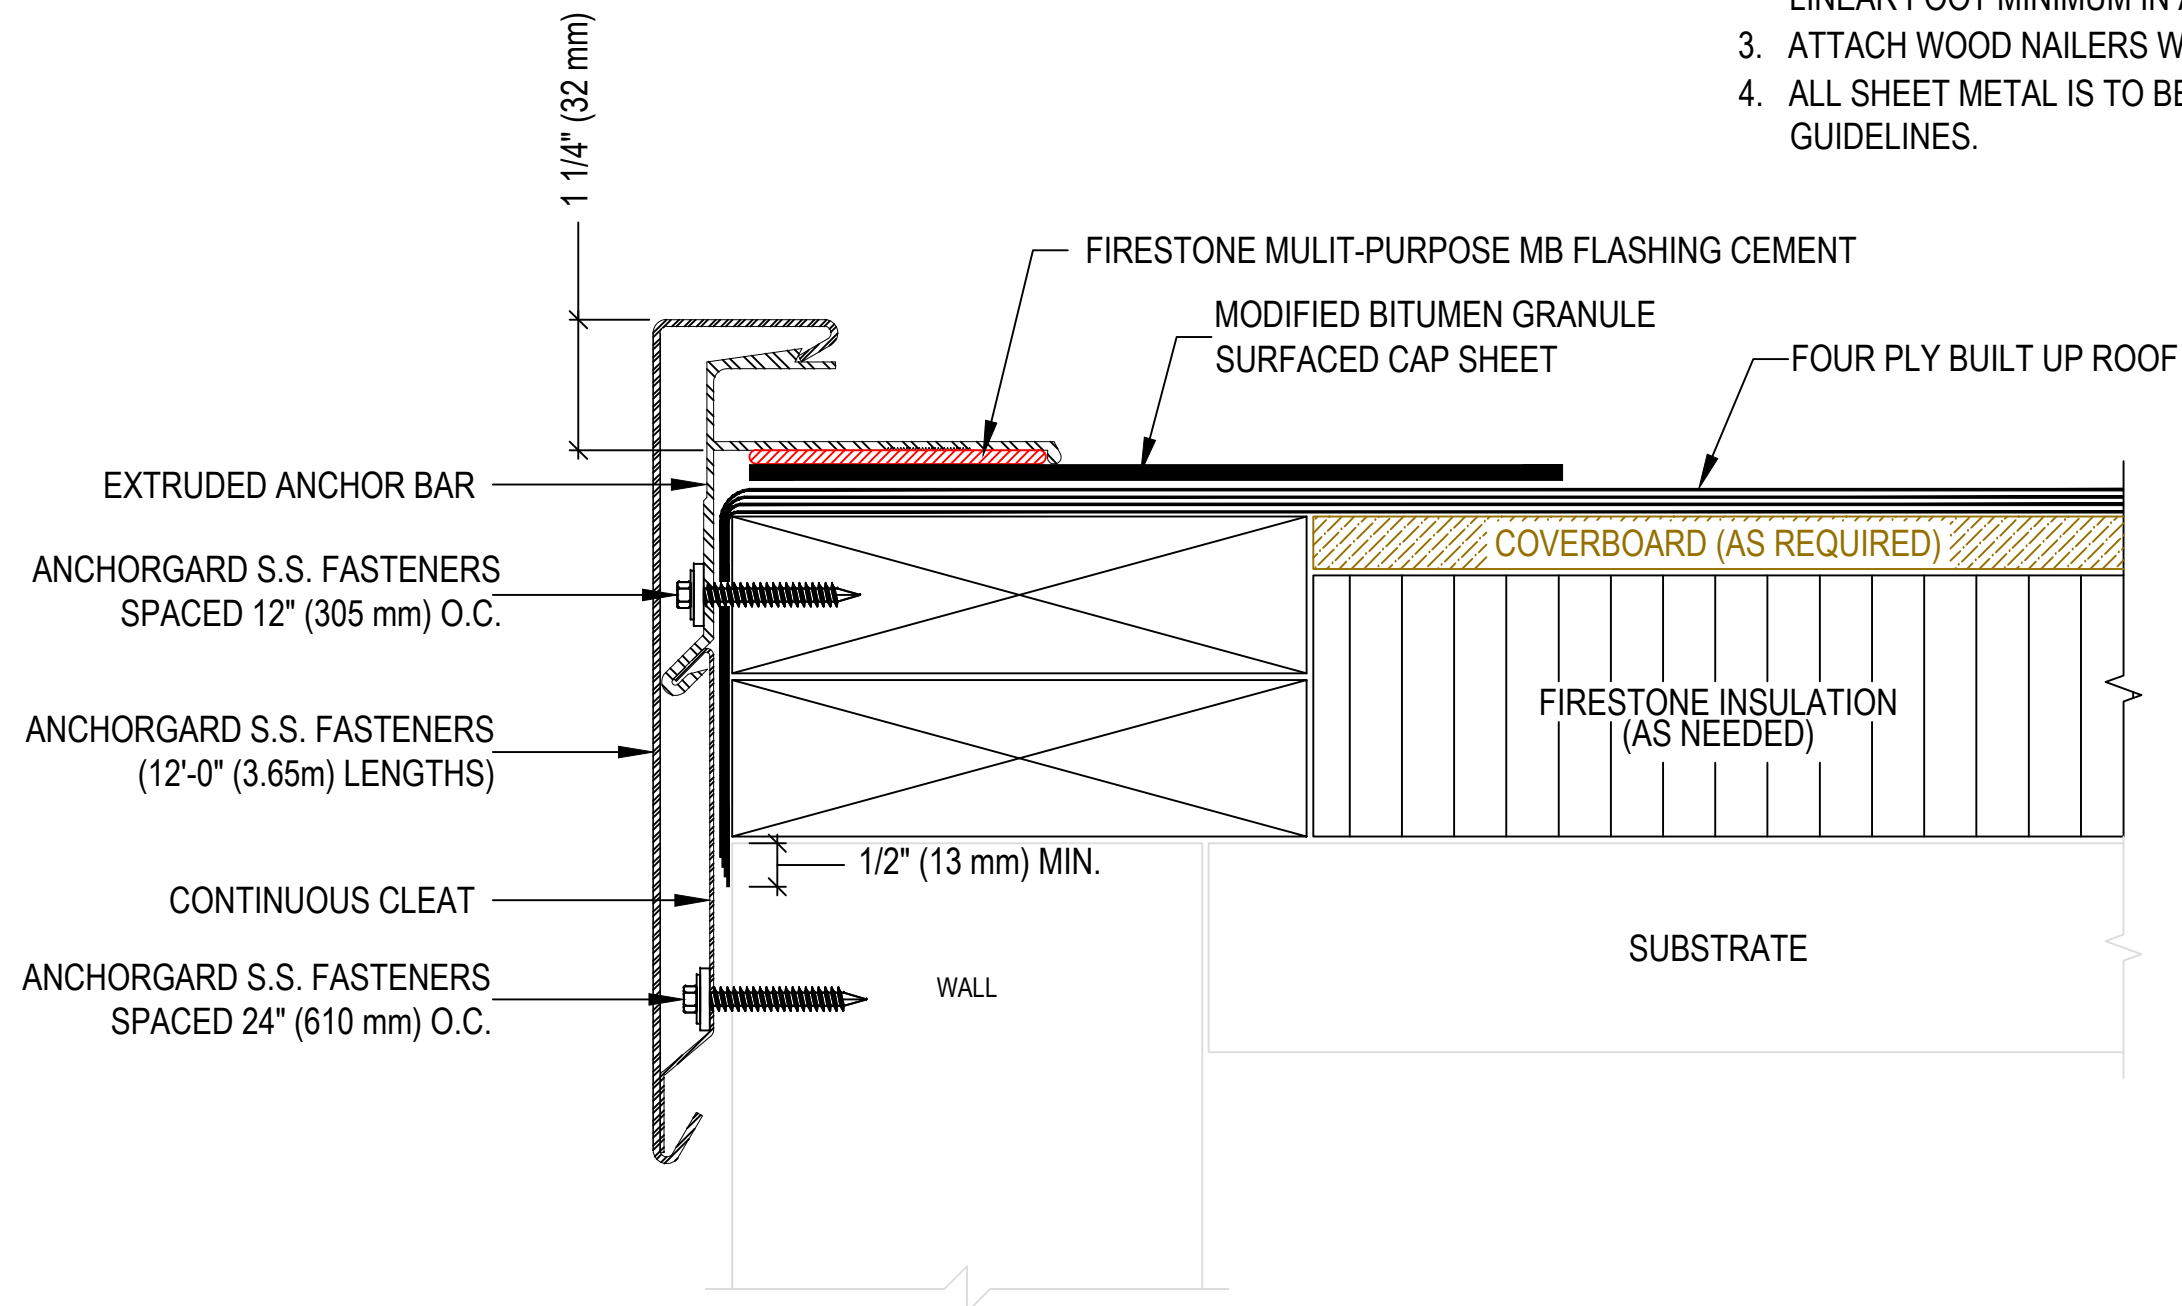

MAXIMUM WARRANTY: 20 YEARS

Firestone
BUILDING PRODUCTS
NOBODY COVERS YOU BETTER.™
www.firestonebpco.com

ANCHORGARD EXTENDED FACE ROOF EDGE

ASPHALT SYSTEMS

ACCEPTABLE SYSTEMS: BUR

ISSUE/REVISION
DATE:

01/17/2014

NOT TO SCALE

DETAIL NO.

BU-RE-5