


NOTCHED PATCH

NOTES:

1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION AT [www.firestonebpco.com](http://www.firestonebpco.com).
2. CUT MEMBRANE AND WRAP CORNERS AS SHOWN.
3. INSTALL NOTCHED PATCHES AS SHOWN TO INSURE WATER TIGHT CORNERS.
4. REFER TO DETAILS MB-LS-1, MB-LS-2 & MB-LS-3 FOR APPROPRIATE LAP SEALING OPTIONS.

ASPHALT IS APPLIED UNIFORMLY TO EACH PLY AT A RATE OF APPROXIMATELY 25 LBS PER 100 SQ/FT OF ROOF SURFACE ( $\pm 15\%$ )

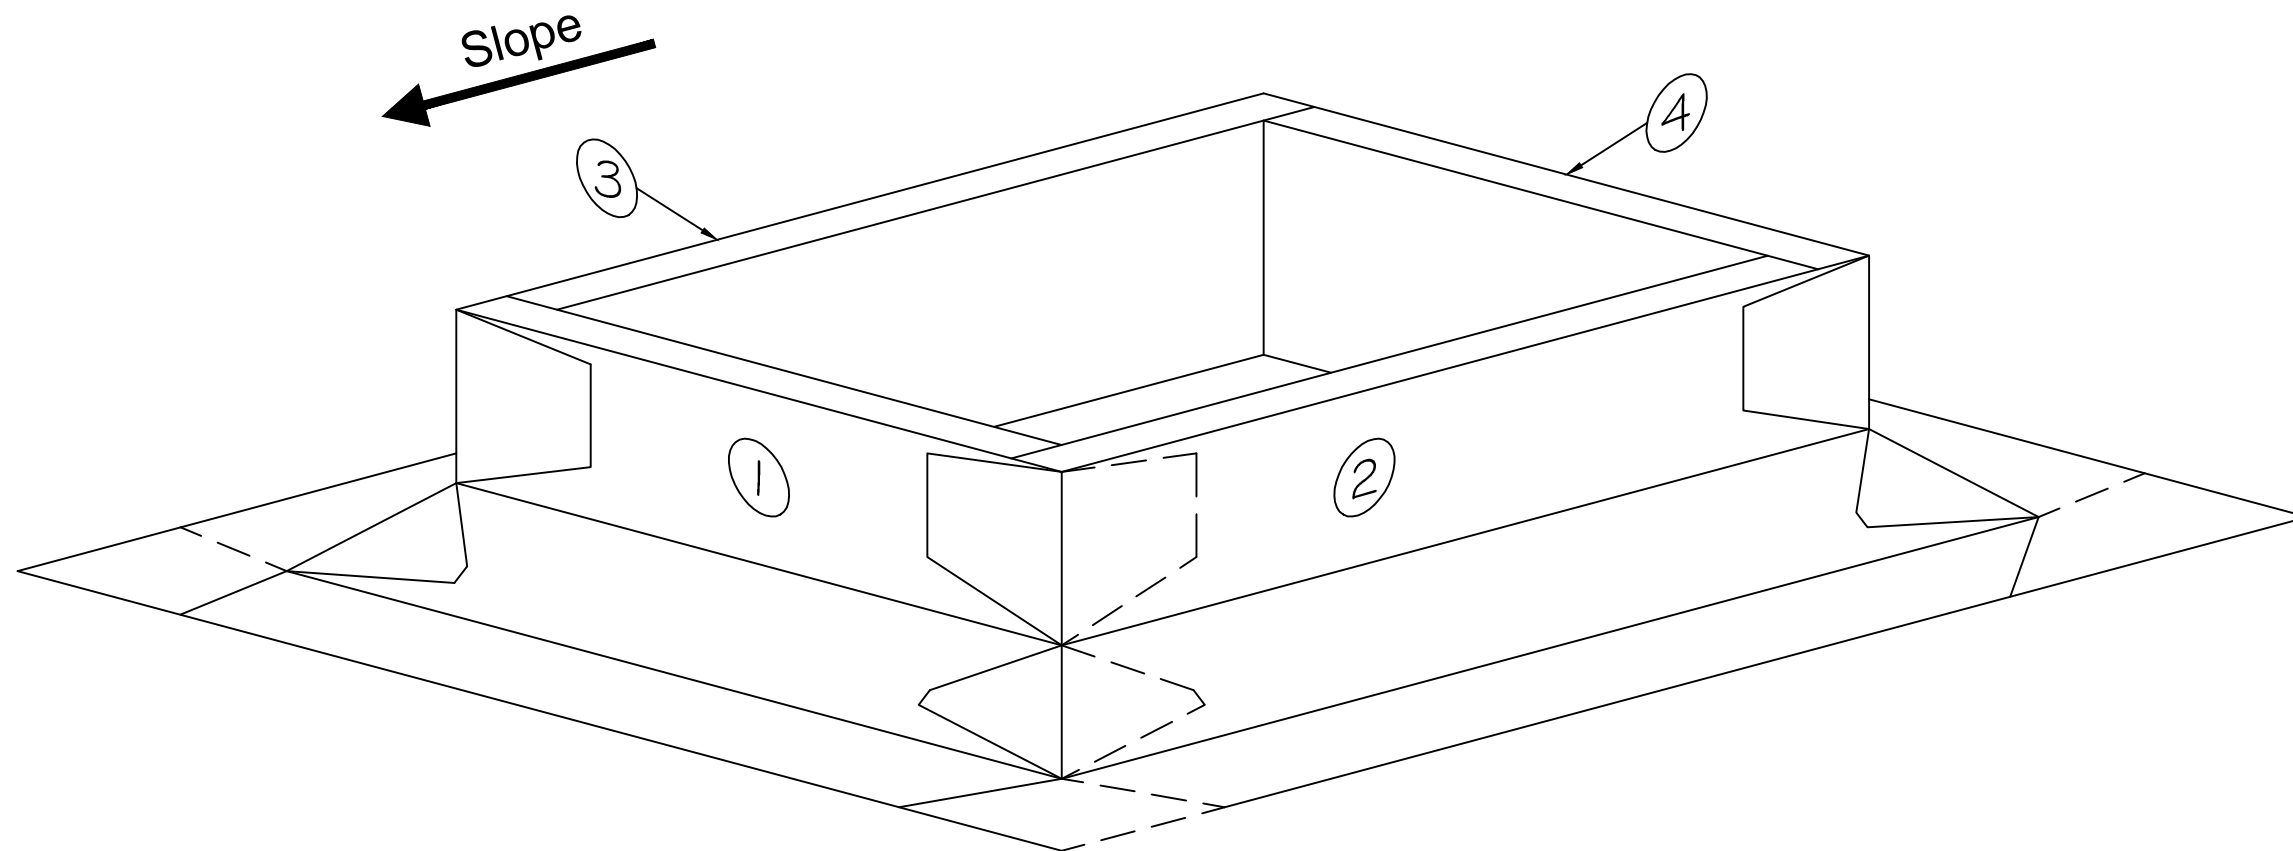

MAXIMUM WARRANTY: 20 YEARS

ISSUE/REVISION  
DATE:

01/17/2014

NOT TO SCALE

DETAIL NO.

BU-C-1

OUTSIDE CORNER

ASPHALT SYSTEMS

ACCEPTABLE SYSTEMS: BUR

**Firestone**  
BUILDING PRODUCTS  
NOBODY COVERS YOU BETTER.™  
[www.firestonebpco.com](http://www.firestonebpco.com)