


**ASPHALT IS APPLIED UNIFORMLY TO EACH PLY AT A RATE OF APPROXIMATELY 25 LBS PER 100 SQ/FT OF ROOF SURFACE (±15%)**

**NOTES:**

1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
2. FIRESTONE RED SHIELD PIPE AND EQUIPMENT SUPPORTS ARE RECOMMENDED IN PLACE OF WOOD SLEEPERS. REFER TO CURRENT TECHNICAL INFORMATION SHEETS.
3. DO NOT INSTALL WOOD SLEEPER OVER BATTEN STRIPS, FASTENER HEADS, METAL PLATES OR FIELD SEAMS.

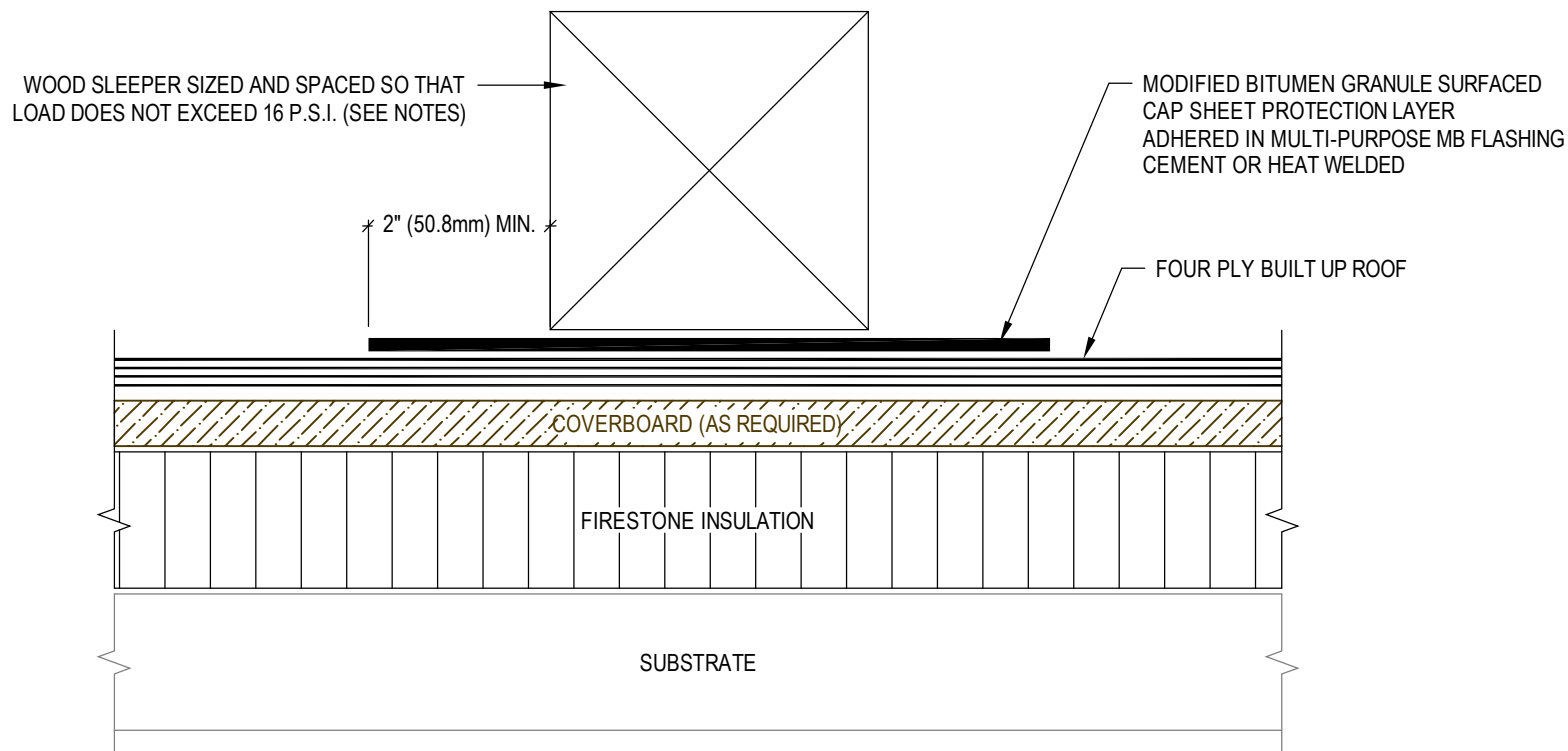

**MAXIMUM WARRANTY: 20 YEARS**

ISSUE/REVISION  
DATE:

1/1/2006

DETAIL NO.

**BU-M-3**

NOT TO SCALE

**Firestone**  
BUILDING PRODUCTS  
**NOBODY COVERS YOU BETTER.™**  
[www.firestonebpco.com](http://www.firestonebpco.com)

**SLEEPER**

**ASPHALT SYSTEMS**

ACCEPTABLE SYSTEMS: BUR