


ASPHALT IS APPLIED UNIFORMLY TO EACH PLY AT A RATE OF APPROXIMATELY 25 LBS PER 100 SQ/FT OF ROOF SURFACE (±15%)

- NOTES:
- 1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION AT www.firestonebpco.com.
 - 2. WHEN DRAIN SUMP EXCEEDS 1:12 DRAIN INSERT IS RECOMMENDED.
 - 3. THE HOLE IN THE INTERPLY SHOULD EXTEND A MINIMUM OF 1 INCH (25 MM) BEYOND THE CLAMPING RING AND SHOULD NOT BE SMALLER THAN THE DIAMETER OF THE LEADER PIPE.

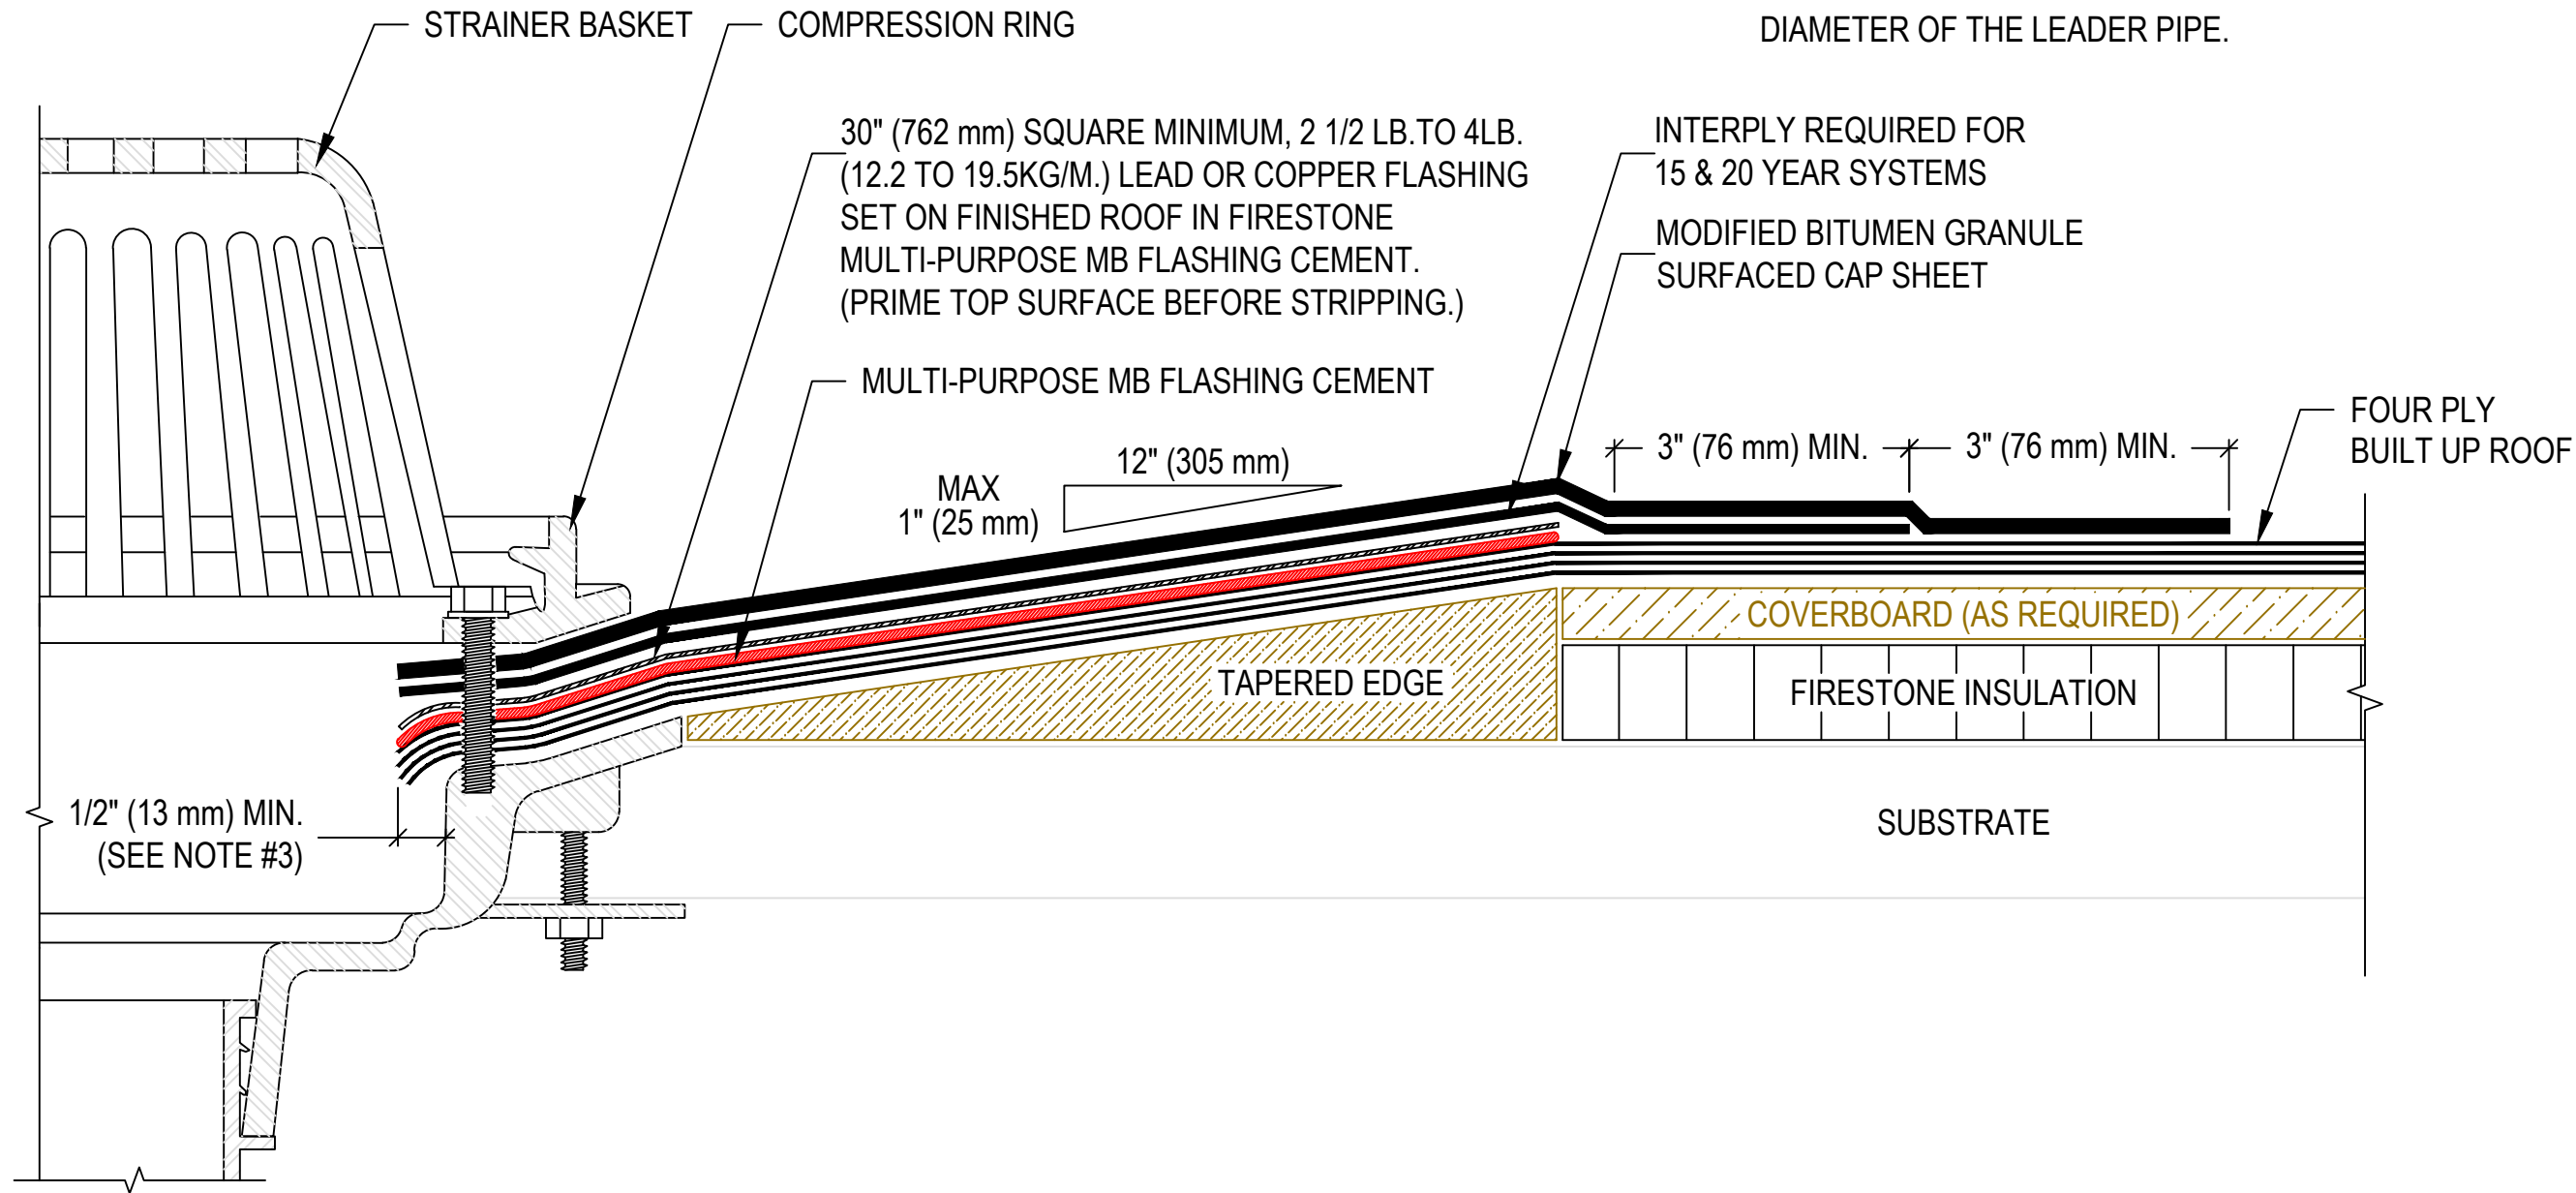

MAXIMUM WARRANTY: 20 YEARS

Firestone
BUILDING PRODUCTS
NOBODY COVERS YOU BETTER.™
www.firestonebpco.com

ROOF DRAIN

ASPHALT SYSTEMS

ACCEPTABLE SYSTEMS: BUR

ISSUE/REVISION
DATE:
01/17/2014
NOT TO SCALE

DETAIL NO.
BU-D-1