


ASPHALT IS APPLIED UNIFORMLY TO EACH
PLY AT EVT, AT A RATE OF 25 LBS
PER 100 SQ/FT OF ROOF SURFACE (±15%)

NOTES:

1. REFER TO FIRESTONE WEBSITE FOR MOST
CURRENT INFORMATION AT firestonebpco.com.
2. WOOD NAILER MUST BE INSTALLED TO MEET
APPLICABLE BUILDING CODES OR 200 LBS PER
LINEAR FOOT MINIMUM IN ANY GIVEN DIRECTION.
3. ATTACH WOOD NAILERS WITH SUITABLE FASTENERS.
4. THIS DETAIL SHOULD BE USED ONLY WHERE THE
DECK IS SUPPORTED BY THE OUTSIDE WALL.
5. ALL SHEET METAL IS TO BE INSTALLED PER SMACNA
GUIDELINES.

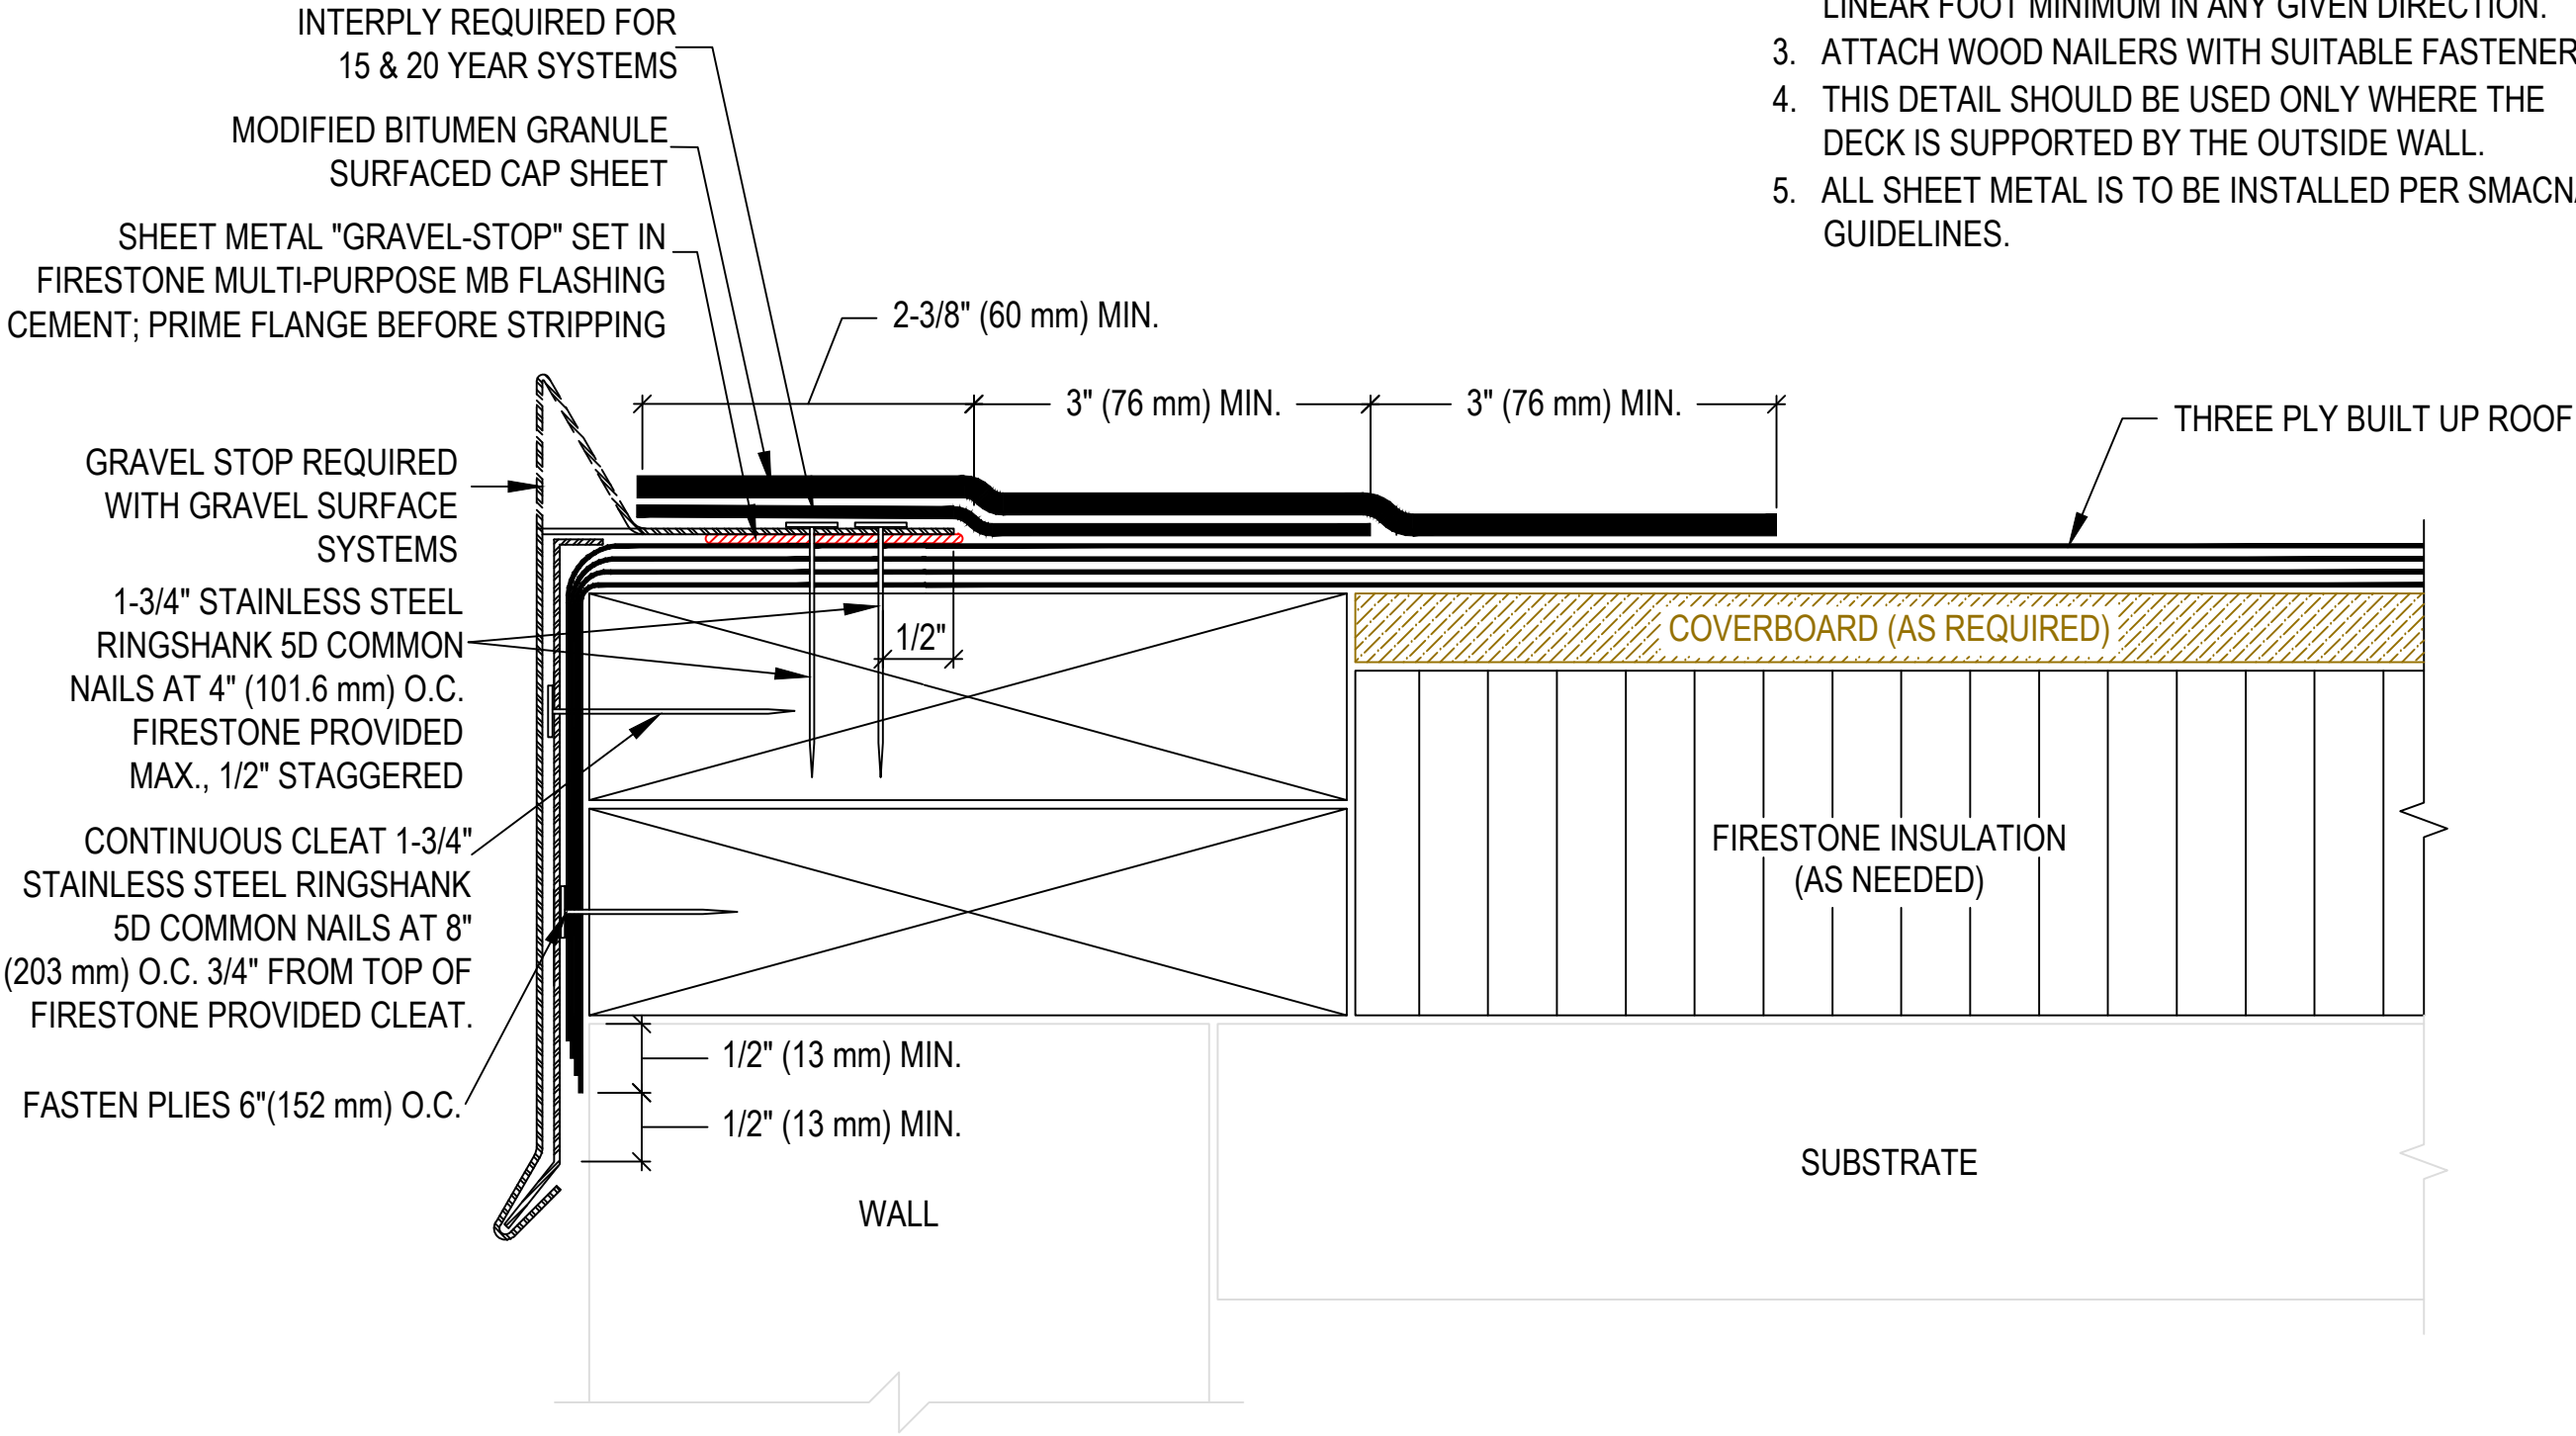

MAXIMUM WARRANTY: 20 YEARS

Firestone
BUILDING PRODUCTS
NOBODY COVERS YOU BETTER.™
www.firestonebpco.com

UNA-EDGE DRIPEDGE/GRAVEL-STOP EDGE WITH STRIP IN

ASPHALT SYSTEMS

ACCEPTABLE SYSTEMS: BUR

ISSUE/REVISION
DATE:

01/17/2014

NOT TO SCALE

DETAIL NO.

BU-RE-1A