


ASPHALT IS APPLIED UNIFORMLY TO EACH PLY AT A RATE OF APPROXIMATELY 25 LBS PER 100 SQ/FT OF ROOF SURFACE (±15%)

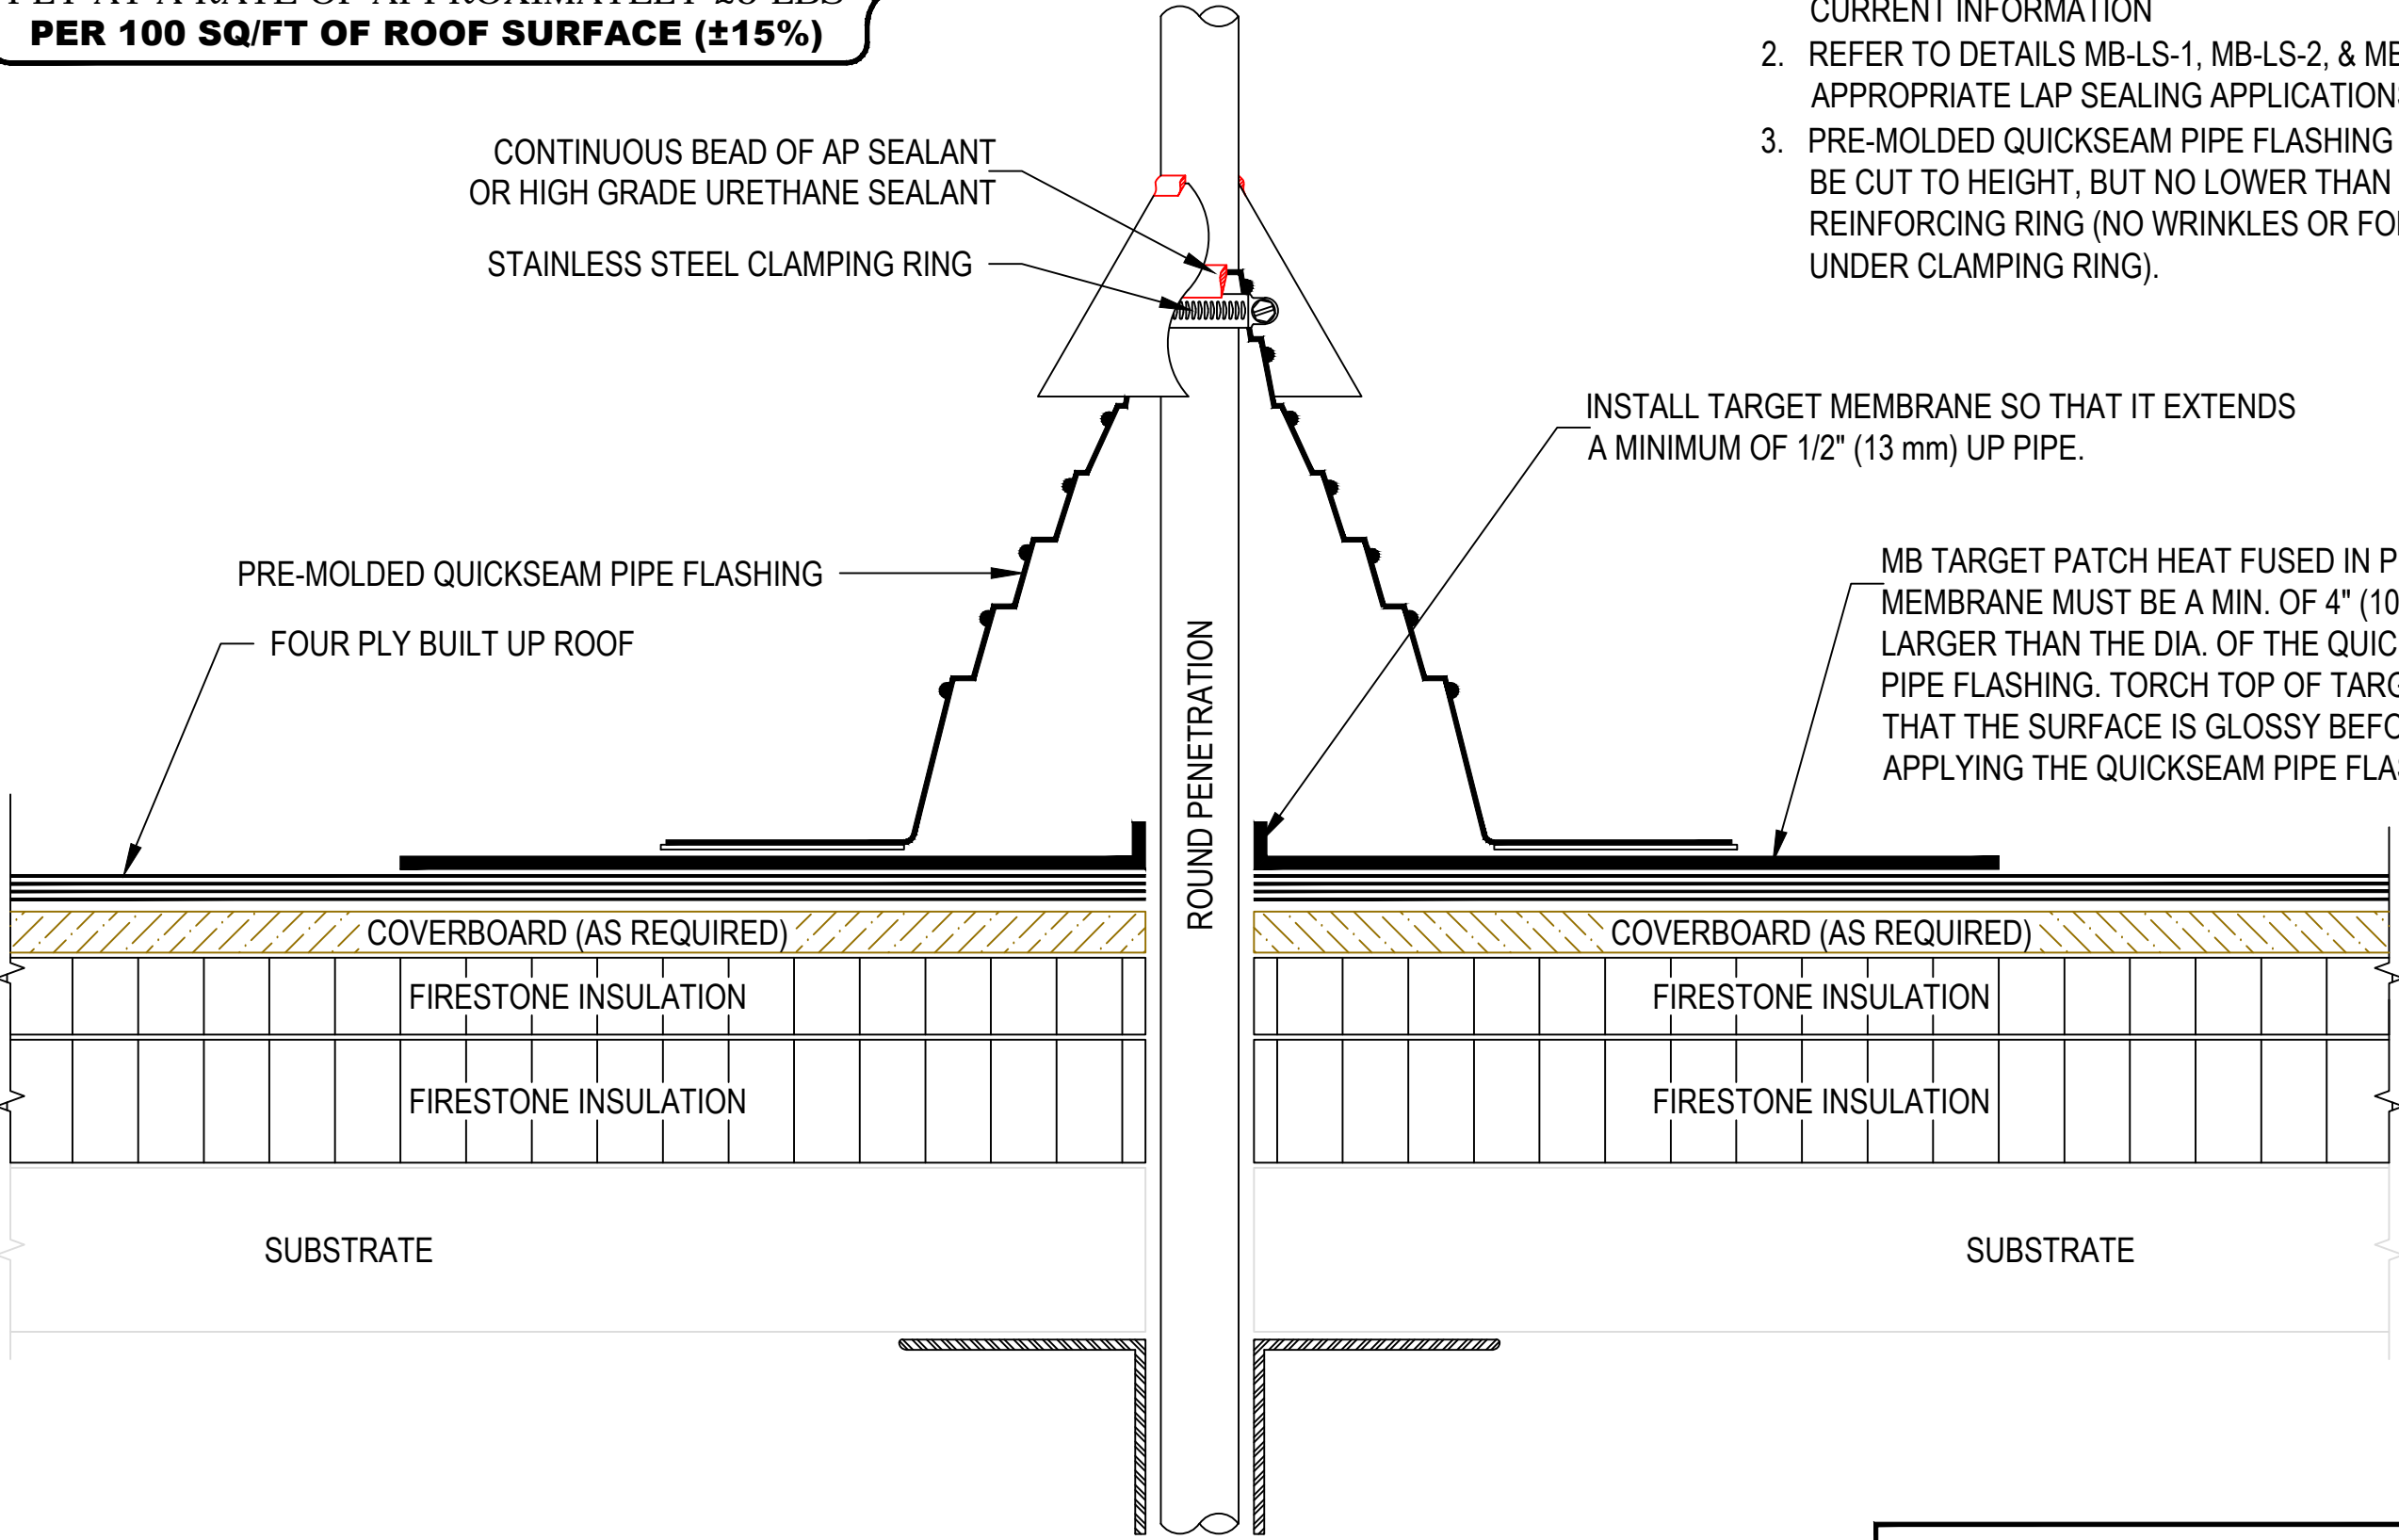

- NOTES:
1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION
 2. REFER TO DETAILS MB-LS-1, MB-LS-2, & MB-LS-3 APPROPRIATE LAP SEALING APPLICATIONS.
 3. PRE-MOLDED QUICKSEAM PIPE FLASHING MAY BE CUT TO HEIGHT, BUT NO LOWER THAN REINFORCING RING (NO WRINKLES OR FOLDS UNDER CLAMPING RING).

MAXIMUM WARRANTY: 20 YEARS