

Table of Tilt-Wash Double-Hung Window Sizes

Scale 1/8" (3) = 1'-0" (305) – 1:96


Window Dimension	1'-9 5/8" (549)	2'-1 5/8" (651)	2'-5 5/8" (752)	2'-7 5/8" (803)	2'-9 5/8" (854)	2'-11 5/8" (905)	3'-1 5/8" (956)	3'-5 5/8" (1057)	3'-9 5/8" (1159)
Minimum Rough Opening	1'-10 1/8" (562)	2'-2 1/8" (664)	2'-6 1/8" (765)	2'-8 1/8" (816)	2'-10 1/8" (867)	3'-0 1/8" (917)	3'-2 1/8" (968)	3'-6 1/8" (1070)	3'-10 1/8" (1172)
Unobstructed Glass (lower sash only)	15" (381)	19" (483)	23" (584)	25" (635)	27" (686)	29" (737)	31" (787)	35" (889)	39" (991)

CUSTOM WIDTHS – 21 5/8" to 45 5/8"

CUSTOM HEIGHTS – 36 7/8" to 92 7/8"	21 5/8"	23 1/8"	25 1/8"	27 1/8"	29 1/8"	31 1/8"	33 1/8"	35 1/8"	37 1/8"	39 1/8"	41 1/8"	43 1/8"	45 5/8"
3'-0 7/8" (937)	TW18210	TW20210	TW24210	TW26210	TW28210	TW210210	TW30210	TW34210	TW38210				
3'-4 7/8" (1038)	TW1832	TW2032	TW2432	TW2632	TW2832	TW21032	TW3032	TW3432	TW3832				
3'-8 7/8" (1140)	TW1836	TW2036	TW2436	TW2636	TW2836	TW21036	TW3036	TW3436	TW3836				
4'-0 7/8" (1241)	TW18310	TW20310	TW24310	TW26310	TW28310	TW210310	TW30310	TW34310	TW38310				
4'-4 7/8" (1343)	TW1842	TW2042	TW2442	TW2642	TW2842	TW21042	TW3042	TW3442	TW3842				
4'-8 7/8" (1445)	TW1846	TW2046	TW2446	TW2646	TW2846	TW21046	TW3046 [◊]	TW3446 [◊]	TW3846 [◊]				
5'-0 7/8" (1546)	TW18410	TW20410	TW24410	TW26410	TW28410	TW210410 [◊]	TW30410 [◊]	TW34410 [◊]	TW38410 [◊]				
5'-4 7/8" (1648)	TW1852	TW2052	TW2452	TW2652	TW2852 [◊]	TW21052 [◊]	TW3052 [◊]	TW3452 [◊]	TW3852 [◊]				
5'-8 7/8" (1749)	TW1856	TW2056	TW2456	TW2656 [◊]	TW2856 [◊]	TW21056 [◊]	TW3056 [◊]	TW3456 [◊]	TW3856 [◊]				
6'-0 7/8" (1851)	TW18510	TW20510	TW24510 [◊]	TW26510 [◊]	TW28510 [◊]	TW210510 [◊]	TW30510 [◊]	TW34510 [◊]	TW38510 [◊]				
6'-4 7/8" (1953)	TW1862	TW2062	TW2462 [◊]	TW2662 [◊]	TW2862 [◊]	TW21062 [◊]	TW3062 [◊]	TW3462 [◊]	TW3862 [◊]				

Custom-size windows are available in 1/8" (3) increments

Cottage or reverse cottage sash ratio available for these heights in all widths. Size tables for cottage or reverse cottage sash are available at andersenwindows.com.

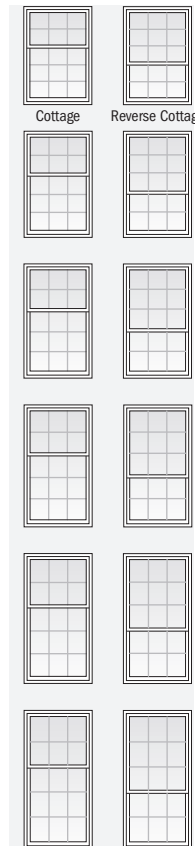

- "Window Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.
- ◊ Meet or exceed clear opening area of 5.7 sq.ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).

continued on next page

Table of Tilt-Wash Double-Hung Window Sizes (continued)

Scale 1/8" (3) = 1'-0" (305) – 1:96

Window Dimension	1'-9 5/8" (549)	2'-1 5/8" (651)	2'-5 5/8" (752)	2'-7 5/8" (803)	2'-9 5/8" (854)	2'-11 5/8" (905)	3'-1 5/8" (956)	3'-5 5/8" (1057)	3'-9 5/8" (1159)
Minimum Rough Opening	1'-10 1/8" (562)	2'-2 1/8" (664)	2'-6 1/8" (765)	2'-8 1/8" (816)	2'-10 1/8" (867)	3'-0 1/8" (917)	3'-2 1/8" (968)	3'-6 1/8" (1070)	3'-10 1/8" (1172)
Unobstructed Glass (lower sash only)	15" (381)	19" (483)	23" (584)	25" (635)	27" (686)	29" (737)	31" (787)	35" (889)	39" (991)

CUSTOM WIDTHS – 21 5/8" to 45 5/8"									
CUSTOM HEIGHTS – 36 7/8" to 92 7/8"									
	7'-4 7/8" (2257)	7'-4 7/8" (2257)	39 15/16" (1014)	7'-8 7/8" (2359)	7'-8 7/8" (2359)	41 15/16" (1065)	7'-4 7/8" (2257)	7'-4 7/8" (2257)	39 15/16" (1014)
TW1872	TW2072 ⁰	TW2472 ⁰	TW2672 ⁰	TW2872 ⁰	TW21072 ⁰	TW3072 ⁰	TW3472 ⁰	TW3872 ⁰	
TW1876	TW2076 ⁰	TW2476 ⁰	TW2676 ⁰	TW2876 ⁰	TW21076 ⁰	TW3076 ⁰	TW3476 ⁰	TW3876 ⁰	

Custom-size windows are available in 1/8" (3) increments

Windows 7'-4 7/8" (2257) and 7'-8 7/8" (2359) high have interior and exterior brackets. Interior brackets, located on both sides of the check rail, must be flipped up for proper product performance.

Andersen® reinforced joining materials must be used when vertically joining 7'-4 7/8" (2257) and 7'-8 7/8" (2359) high windows.

Additional grille patterns are available. Number of lights and overall pattern varies with window size. Verify grille patterns shown before ordering.

- "Window Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters.
- Meet or exceed clear opening area of 5.7 sq.ft. or 0.53 m², clear opening width of 20" (508) and clear opening height of 24" (610).