



CAUTION

FOR PROJECTS WITH 25 & 30-YEAR WARRANTIES OR WHEN USING 90-MIL MEMBRANE, REFER TO [DETAIL U-15H](#) FOR REQUIRED CORNER ENHANCEMENTS.

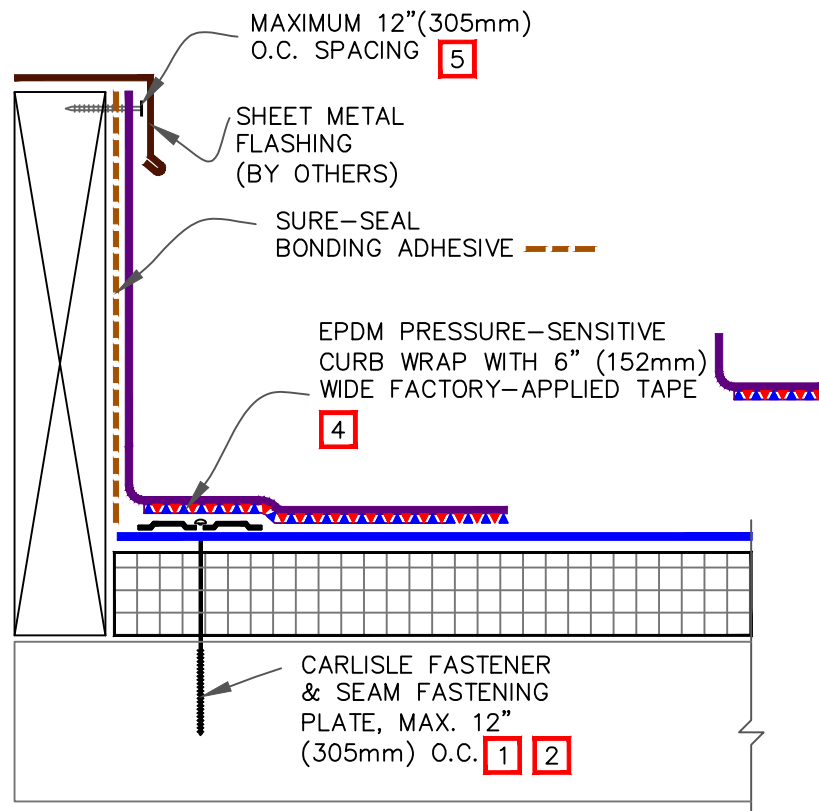

## NOTES:

- ON MECHANICALLY FASTENED ROOFING SYSTEMS, HP FASTENERS AND POLYMER SEAM PLATES ARE REQUIRED OVER STEEL DECKS.
- SEAM FASTENING PLATES/FASTENERS MAY BE INSTALLED INTO THE VERTICAL SUBSTRATE.
- IF THE VERTICAL SPLICE ON THE CURB FLASHING IS NOT LOCATED AT THE CORNER, 6" (152mm) WIDE PRESSURE-SENSITIVE ELASTOFORM OR T-JOINT FLASHING, IN CONJUNCTION WITH EPDM PRIMER, MUST BE CENTERED OVER FIELD SPLICE AT ANGLE CHANGE.
- PRIOR TO THE INSTALLATION OF PRESSURE-SENSITIVE CURB WRAP, APPLY EPDM PRIMER TO SPLICE AREA.
- WHEN MECHANICAL FASTENERS ARE USED TO PENETRATE THE METAL COUNTER-FLASHING, USE EPDM WASHERS, APPLY WATER CUT-OFF MASTIC UNDER THE COUNTER-FLASHING OR CAULK THE FASTENER HEADS.

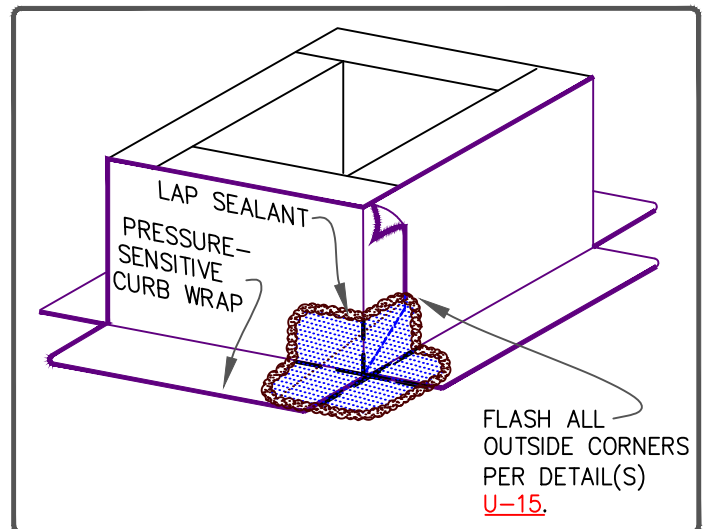

<p>—• EPDM</p> <p>—• APPROVED SUBSTRATE</p> <p><b>0</b> —• SEE NOTE(S)</p>	<p>PRESSURE-SENSITIVE CURB WRAP</p> <p>For additional information, refer to Specifications</p>	<p>DETAIL NO.</p> <p><b>U-5B</b></p> <p>THERMOSET UNIVERSAL</p>
--	--	---