


75-MIL REINFORCED
EPDM

9" (229mm)
WIDE PRESSURE-
SENSITIVE RUSS

SURE-SEAL
PRIMER

SEAM FASTENING
PLATE & FASTENER
POSITIONED ALONG
PRE-PRINTED BLUE
LINE. FASTEN MAX.
12" (305mm) O.C.


DETAIL A

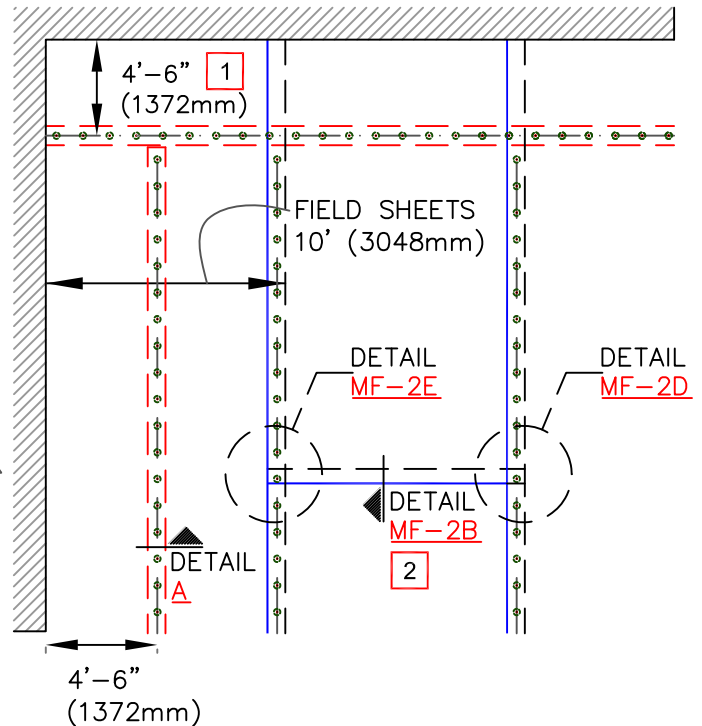

NOTES:

1. REFER TO CARLISLE SPECIFICATIONS FOR REQUIRED NUMBER OF PERIMETER SHEETS AND MEMBRANE FASTENING DENSITY.
2. END LAPS DO NOT REQUIRE MECHANICAL FASTENING AND SHALL BE SPLICED USING 6" (152mm) WIDE SecurTAPE.
3. EPDM PRIMER MUST BE APPLIED TO THE BACK SIDE OF MEMBRANE SURFACE PRIOR TO ADHERING MEMBRANE TO PRESSURE-SENSITIVE RUSS.

GUIDELINES FOR ROOF PERIMETER ZONES FOR MECHANICALLY FASTENED ROOF SYSTEM

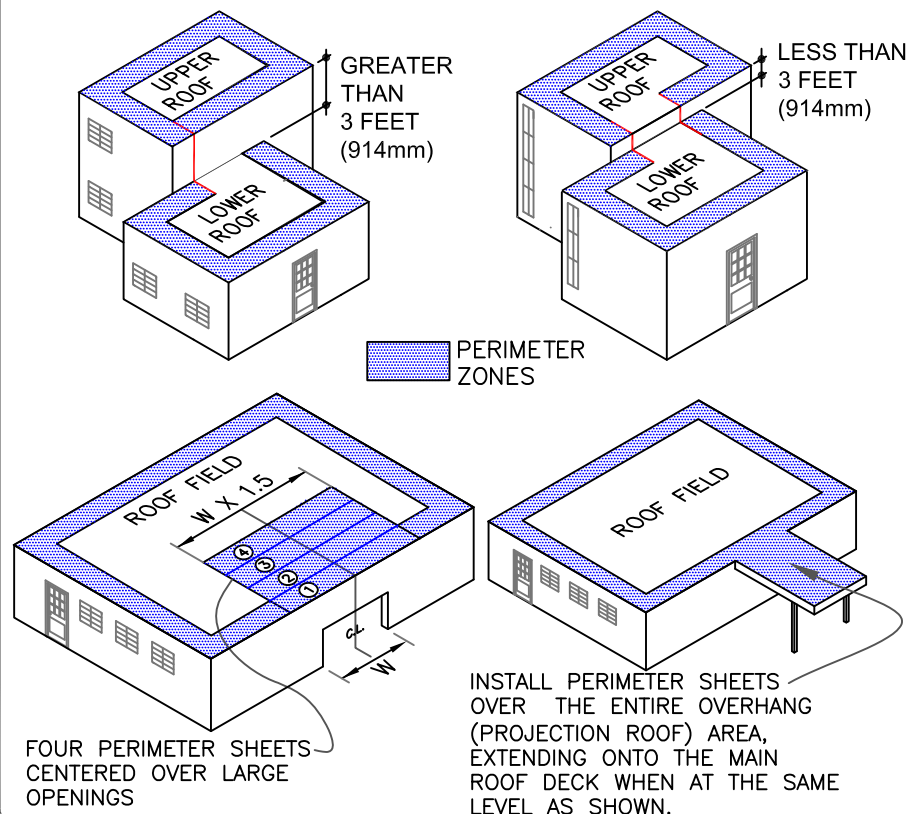

REINFORCED EPDM—
UNLESS NOTED OTHERWISE


APPROVED SUBSTRATE

0

SEE NOTE(S)

MEMBRANE SECUREMENT WITH PRESSURE-SENSITIVE RUSS - OPTION 2 (25/30 YEAR WARRANTIES)

For additional information, refer to Specifications



DETAIL NO.

MF-2.4

MECHANICALLY FASTENED