



CAUTION

FOR PROJECTS WITH 25 & 30-YEAR WARRANTIES OR WHEN USING 90-MIL MEMBRANE, REFER TO [DETAIL U-15D.1](#) FOR REQUIRED FLASHING ENHANCEMENTS.

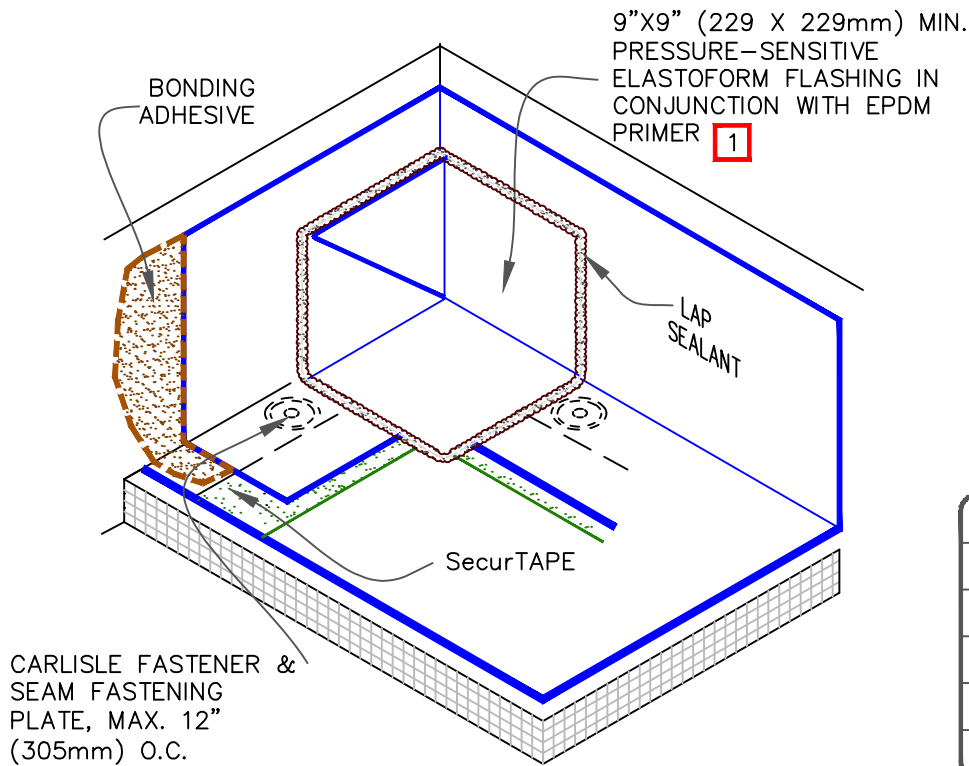

DIMENSIONS	mm	
(A) 6"	152	TO
9"	229	
(B) 1/8"	3	MIN.
1"	25	MAX.
(C) 3"	76	MIN.

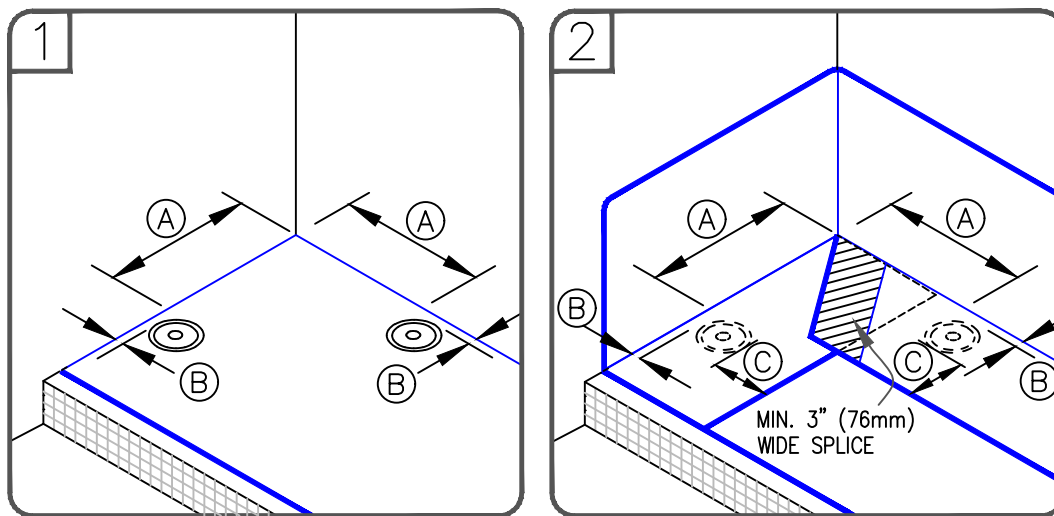

NOTES:

1. APPLY EPDM PRIMER TO THE MEMBRANE SURFACES PRIOR TO INSTALLING PRESSURE-SENSITIVE FLASHING.
2. IN COLDER TEMPERATURES, A HEAT GUN MUST BE USED WHEN FORMING PRESSURE-SENSITIVE ELASTOFORM FLASHING.

—• EPDM —• APPROVED SUBSTRATE —• SEE NOTE(S)	INSIDE CORNER WITH SEPARATE EPDM WALL FLASHING For additional information, refer to Specifications		DETAIL NO. U-15D THERMOSET UNIVERSAL
--	--	--	---