



NOTES:

1. FASCIA HORIZONTAL FLANGE MUST BE TOTALLY COVERED MINIMUM 2" (51mm) BEYOND THE NAIL.
2. REFER TO [MR Z1.1 & MR Z1.2](#) AT THE END OF THIS SECTION.

EXISTING FIXED
(NON-FLOATING)
RAKE TO REMAIN

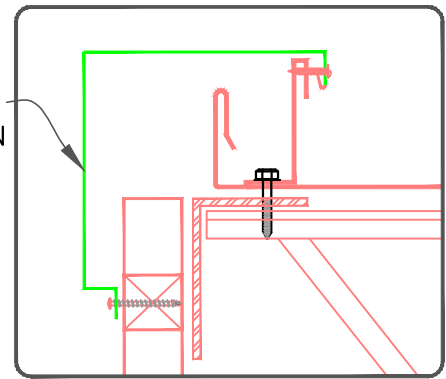

EXISTING FIXED RAKE EDGE

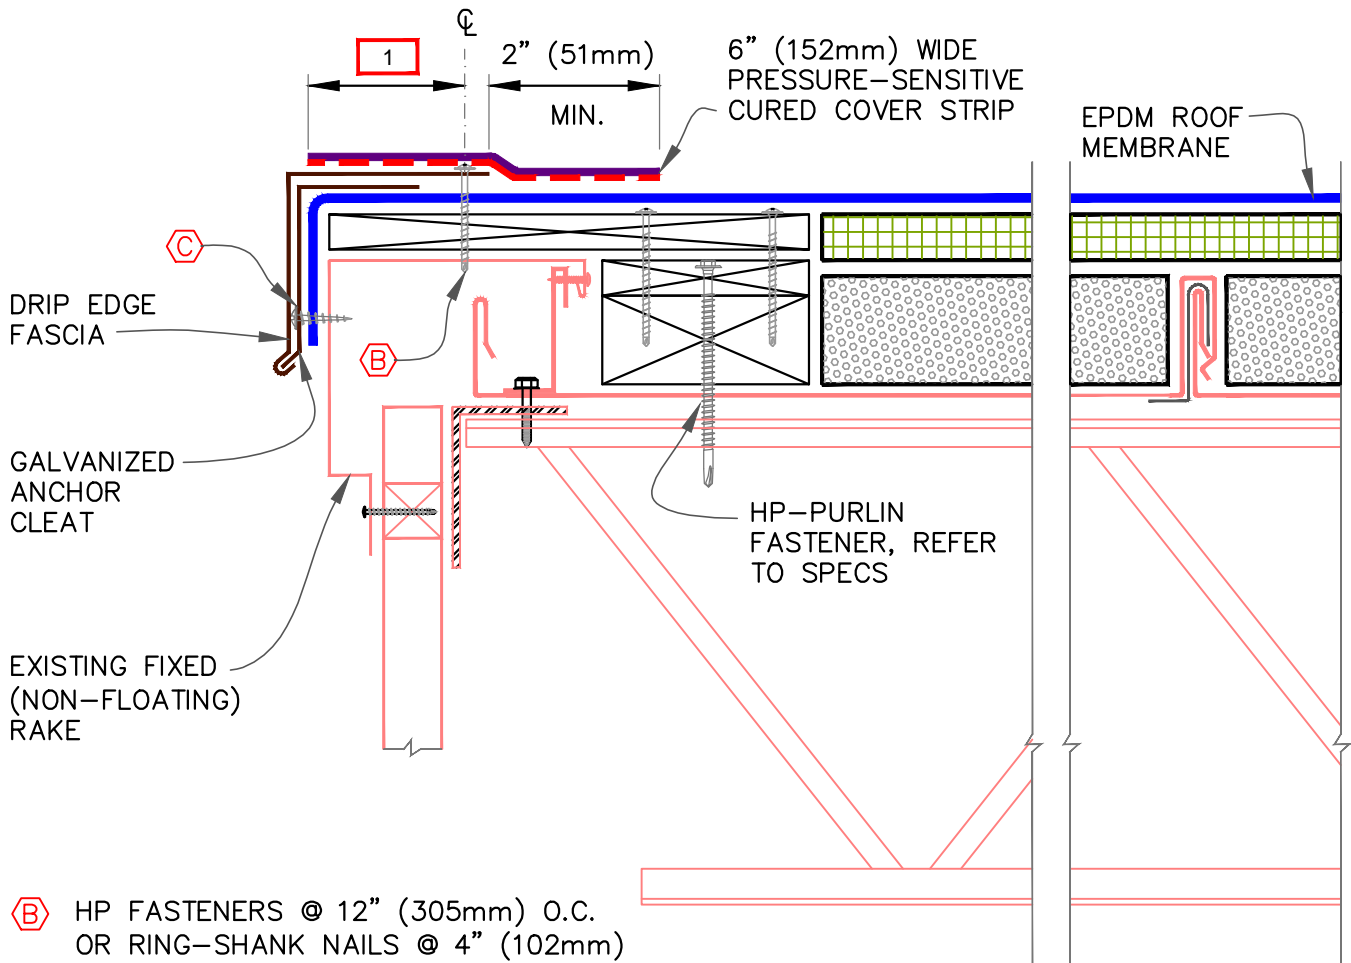


Ⓑ HP FASTENERS @ 12" (305mm) O.C.
OR RING-SHANK NAILS @ 4" (102mm)
O.C. & STAGGERED 3/4" (19mm) O.C.

Ⓒ SHEET METAL SCREWS @ 6" O.C.,
MAX., EXPOSED 3/4" (19mm) MIN.
BEYOND EXISTING SHEET METAL
SUBSTRATE

RAKE EDGE

	• HIGH DENSITY RECOVER BOARD		• ROOF MEMBRANE
	• IN-FILL INSULATION		• WOOD NAILER (BY OTHERS)
	• SEE DRAWING NOTE(S)		



SHEET NO.

MR E1.8