




CAUTION

FOR PROJECTS WITH 25 & 30-YEAR WARRANTIES OR WHEN USING 90-MIL MEMBRANE, REFER TO [DETAIL U-15H](#) FOR REQUIRED FLASHING ENHANCEMENTS.

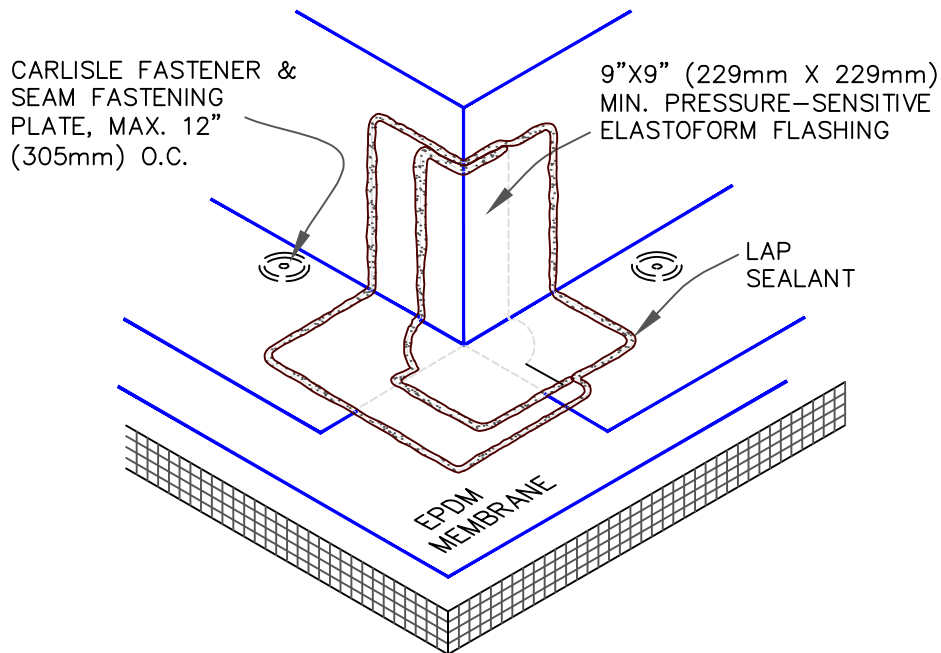

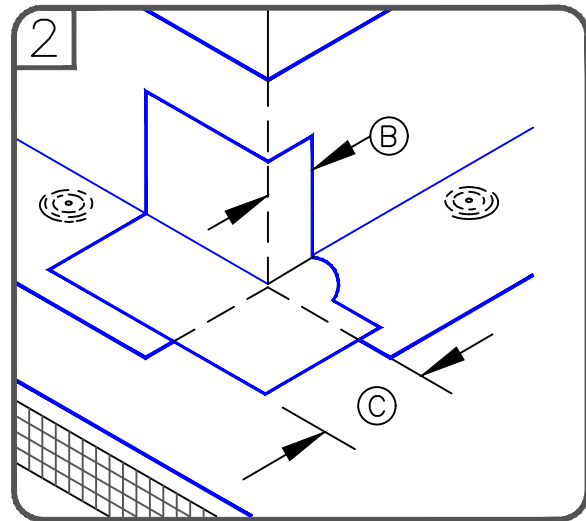

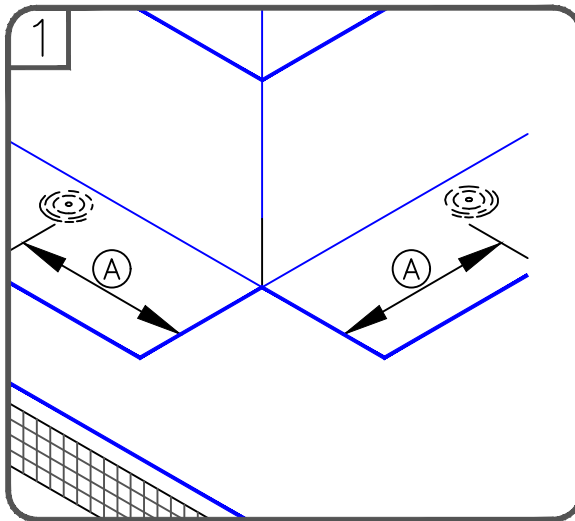

DIMENSIONS		mm	
(A)	6"	152	TO
	9"	229	
(B)	2"	51	MIN.
(C)	3"	76	MAX.



NOTES:

1. APPLY EPDM PRIMER TO THE MEMBRANE SURFACES PRIOR TO INSTALLING PRESSURE-SENSITIVE FLASHING.
2. PRESSURE-SENSITIVE ELASTOFORM FLASHING TO OVERLAP DECK MEMBRANE 3" (76mm) MINIMUM AND EXTEND 2" (51mm) MINIMUM AROUND CORNERS.
3. IN COLDER TEMPERATURES, A HEAT GUN MUST BE USED WHEN FORMING PRESSURE-SENSITIVE ELASTOFORM FLASHING.

	—• EPDM	OUTSIDE CORNER WITH PRESSURE-SENSITIVE ELASTOFORM FLASHING (OPTION 1)		DETAIL NO.
	—• APPROVED SUBSTRATE			U-15F
	—• SEE NOTE(S)	For additional information, refer to Specifications	THERMOSET UNIVERSAL	