PRESSURE-SENSITIVE FLASHING, 6" MIN.

METAL GRAVEL STOP/FASCIA
(BY OTHERS)

BEAD OF WATER CUT-OFF MASTIC IN WARM SIDE CORNER PRIOR TO SETTING ON PANEL (BY OTHERS), FASTEN WITH #8 X 3/4" TRUSS HEAD TEK SCREWS SPACED 12" O.C. (BOTH SIDES). FASTEN EXTERIOR SIDE OF CAP FIRST SO CAP IS TIGHT TO EXTERIOR OF PANEL

ROOF MEMBRANE

2" WIDE, TGM 3300 TAPE

TROWEL-GRADE POLYURETHANE SEALANT IN PANEL LOWS

FASTEN MEMBRANE EDGE WITH 1/8"THICK X 1"
WIDE TERMINATION BAR WITH #8X3/4" TEK
SCREWS 6" O.C. TO CAP


FOAM CLOSURE STRIP (OPTIONAL)

2, WIDE, TGM 3300 TAPE

CONTINUOUS SHEET METAL CLIP

INSULATED WALL PANELS (BY OTHERS)

INSULATED WALL PANELS LOWS

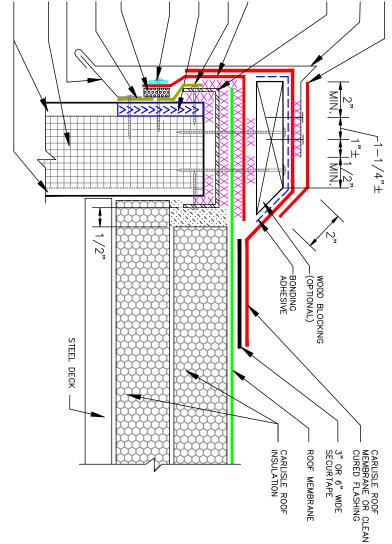

DETAIL PROVIDED COURTESY OF GROUP4 MATERIALS, INC.
BROOKFIELD, WISCONSIN



UNIVERSAL DETAIL COLD STORAGE ENVELOPE ROOF EDGE DETAIL

COLD STORAGE DETAILS

FOAM-IN-PLACE INSULATION

SURE-SEAL WATER CUT-OFF MASTIC