
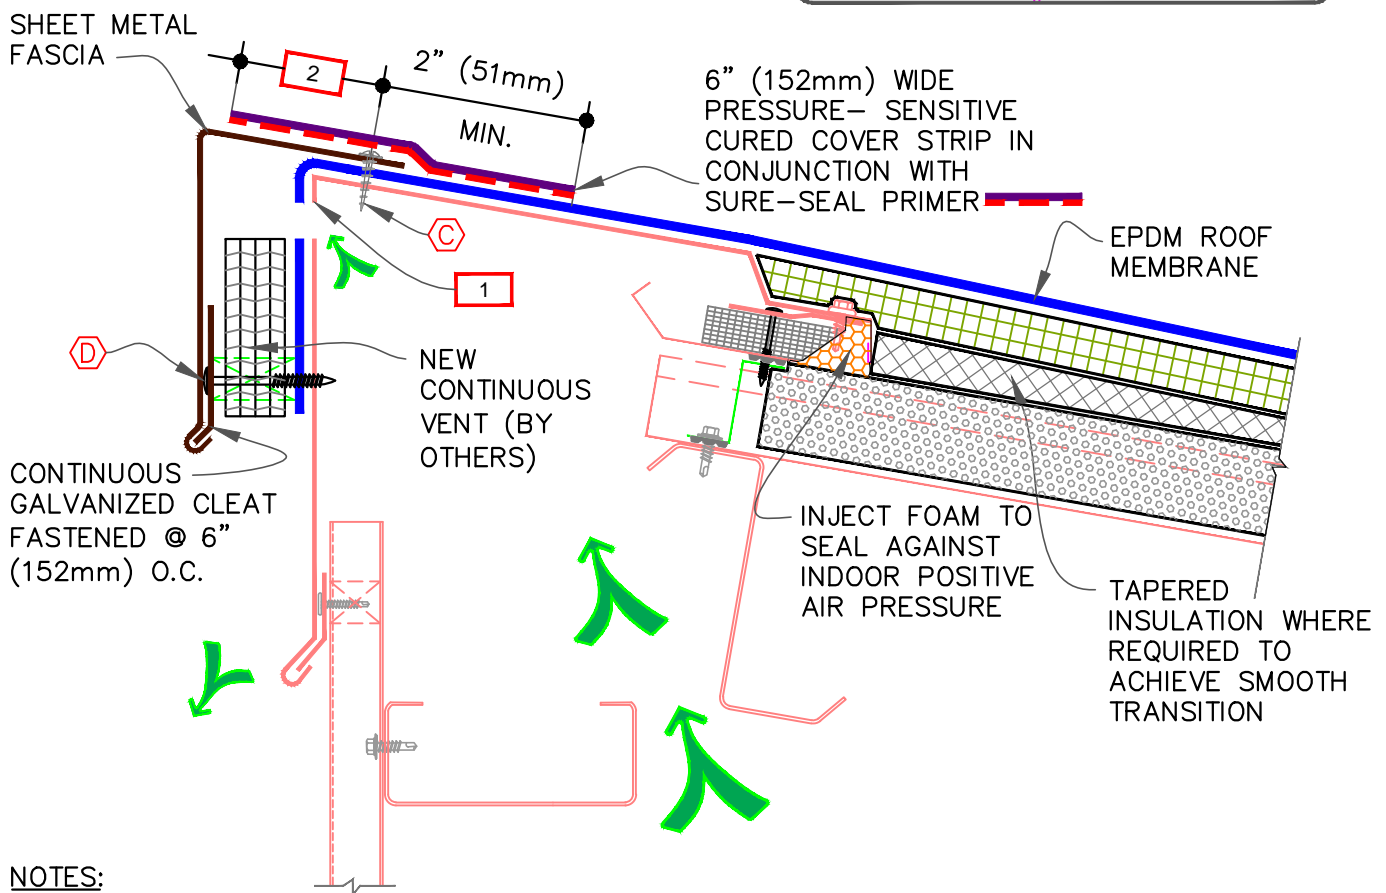


- Ⓒ SHEET METAL SCREWS @ 6" O.C., MAX., EXPOSED 3/4" (19mm) MIN. BEYOND EXISTING SHEET METAL SUBSTRATE
- Ⓓ FASTENERS TO MATCH EXISTING @ 6" O.C., MAX., EXPOSED 3/4" (19mm) MIN. BEYOND EXISTING SUBSTRATE

EXISTING
HIGH-END
VENTED ROOF
EDGE

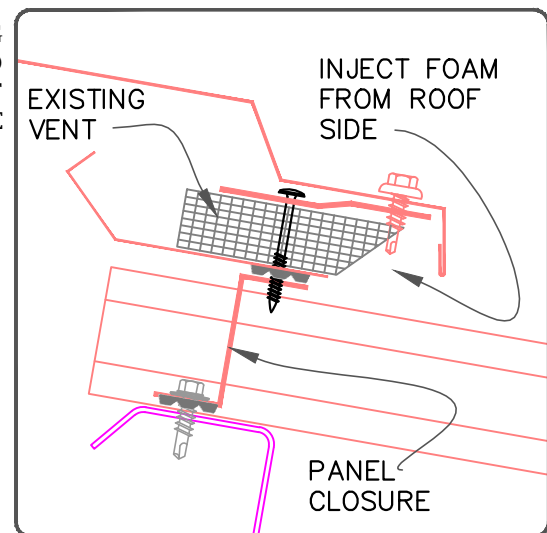


NOTES:

1. CUT HOLES IN EXISTING HIGH EAVE TRIM AT TOP TO REDIRECT VENTING. DESIGNER TO CALCULATE THE SIZES, FREQUENCY OF HOLES WITHOUT WEAKENING THE SHEET METAL.
2. DECK FLANGE MUST BE TOTALLY COVERED BY PRESSURE-SENSITIVE CURED COVER STRIP, MINIMUM 2" (51mm) COVERAGE PAST FASTENER HEAD.

HIGH-END VENTED ROOF EDGE

	• HIGH DENSITY RECOVER BOARD		• ROOF MEMBRANE
	• IN-FILL INSULATION		• WOOD NAILER (BY OTHERS)
	• SEE DRAWING NOTE(S)		



SHEET NO.

MR E1.7