


CAUTION


FOR PROJECTS WITH 25 & 30-YEAR WARRANTIES OR WHEN USING 90-MIL MEMBRANE, REFER TO [DETAIL U-15H](#) FOR REQUIRED CORNER ENHANCEMENTS.



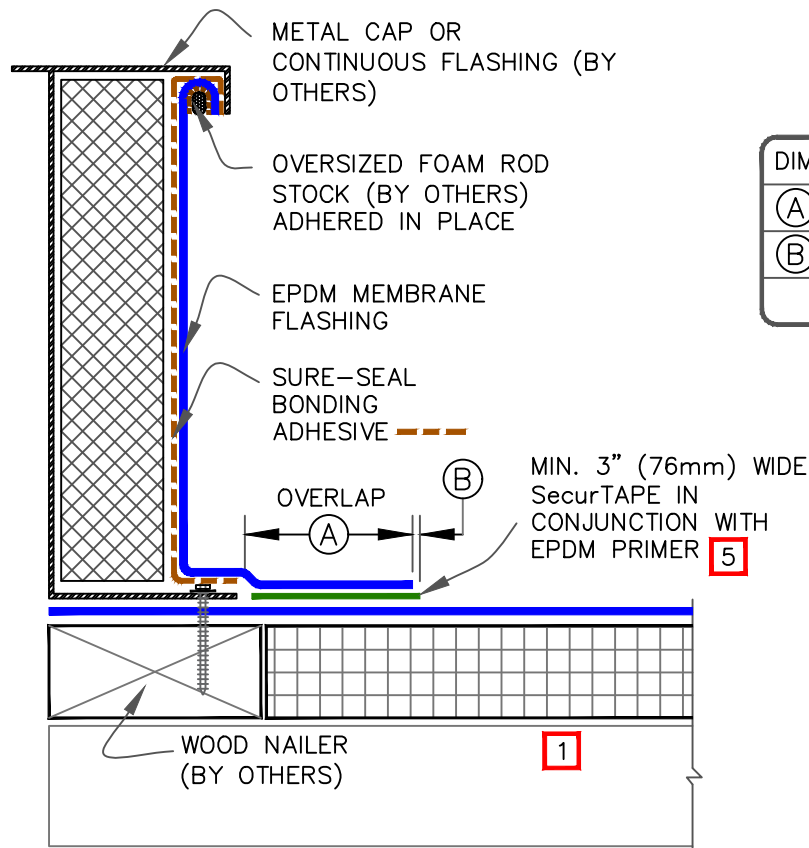


DIMENSIONS		mm	
(A)	3"	76	APPROX.
(B)	1/8"	3	MIN.
	1/2"	13	MAX.

## NOTES:

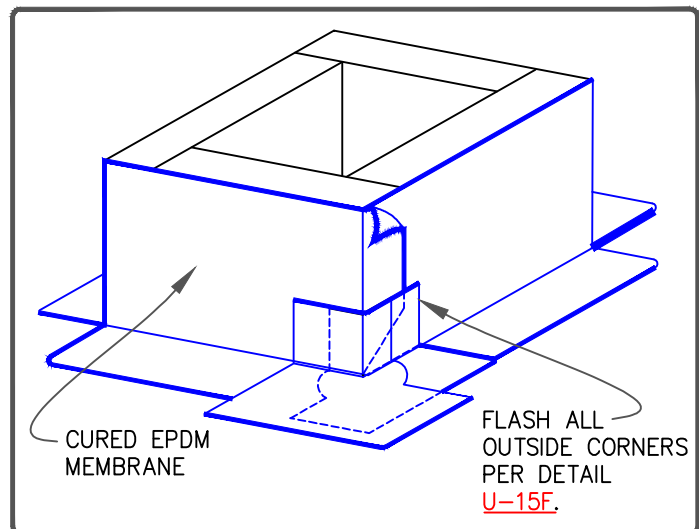- WOOD NAILER MUST EXTEND PAST TOTAL WIDTH OF CURB FLANGE.
- LENGTH OF ROD STOCK IS LIMITED TO 4' (1219mm). USE INDIVIDUAL SECTIONS OF ROD STOCK FOR LONGER DIMENSIONS.
- 7"X9" (178mm X 229mm) PRESSURE-SENSITIVE CORNERS CANNOT BE USED FOR THIS DETAIL WHEN THE FLANGE IS LOCATED ON TOP OF THE MEMBRANE DUE TO INCOMPLETE COVERAGE OF THE METAL FLANGE AT CORNERS. REFER TO [DETAIL U-15F](#).
- DETAIL IS NOT ACCEPTABLE FOR VIBRATING ROOF TOP UNITS.
- MEMBRANE SPLICES SHALL INCORPORATE 6" (152mm) WIDE FIELD APPLIED SecurTAPE FOR PROJECTS WITH 20, 25 and 30-YEAR WARRANTIES.



 —• EPDM  —• APPROVED SUBSTRATE  —• SEE NOTE(S)	<b>SELF-FLASHING CURB</b>  For additional information, refer to Specifications		DETAIL NO. <b>U-5D</b>
		THERMOSET UNIVERSAL	