


EXISTING CONDITION

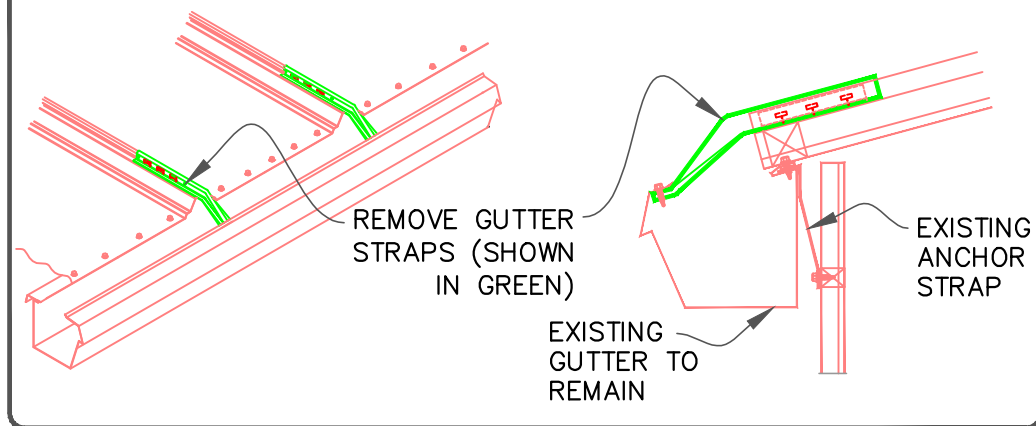

UNIVERSAL SINGLE PLY SEALANT

SURE-SEAL TERMINATION BAR OR RETAINING BAR TO AVOID OVER SPILLING OF WATER OUTSIDE THE GUTTER, FASTENED 6" (152mm) O.C. REFER TO CARLISLE DETAIL B-1D.

WATER CUT-OFF MASTIC XXX

NEW FASTENERS & STRAPS (BY OTHERS)

EXISTING GUTTER

BONDING ADHESIVE

EPDM ROOF MEMBRANE

HP-PURLIN FASTENER, REFER TO SPECS

2" (51mm) MIN.


INJECT SEALANT TO SEAL THE OPENINGS & PROVIDE CUSHION AROUND FASTENER & OTHER PROTRUSIONS.

NOTE:

REFER TO MR Z1.1 & MR Z1.2 AT THE END OF THIS SECTION.

GUTTER WITH STRAPS ANCHORED INTO STANDING SEAMS

	• HIGH DENSITY RECOVER BOARD		• ROOF MEMBRANE
	• IN-FILL INSULATION		• WOOD NAILER (BY OTHERS)
			• SEE DRAWING NOTE(S)



SHEET NO.

MR E1.5