

PRESSURE-SENSITIVE FLASHING, 6" MIN.

METAL GRAVEL STOP/FASCIA
(BY OTHERS)

16 GA. GALV. CHANNEL FILLED WITH 3/8"
BEAD OF WATER CUT-OFF MASTIC IN WARM
SIDE CORNER PRIOR TO SETTING ON PANEL
(BY OTHERS), FASTEN WITH #8 X 3/4" TRUSS
HEAD TEK SCREWS SPACED 12" O.C. (BOTH
SIDES), FASTEN EXTERIOR SIDE OF CAP FIRST
SO CAP IS TIGHT TO EXTERIOR OF PANEL


ROOF MEMBRANE


OPTION A: TROWEL-GRADE POLYURETHANE
SEALANT IN PANEL LOWS OR
OPTION B: WATER CUT-OFF MASTIC

CONTINUOUS SHEET METAL CLIP

INSULATED WALL PANELS (BY OTHERS)

INSULATED WALL PANELS LOWS

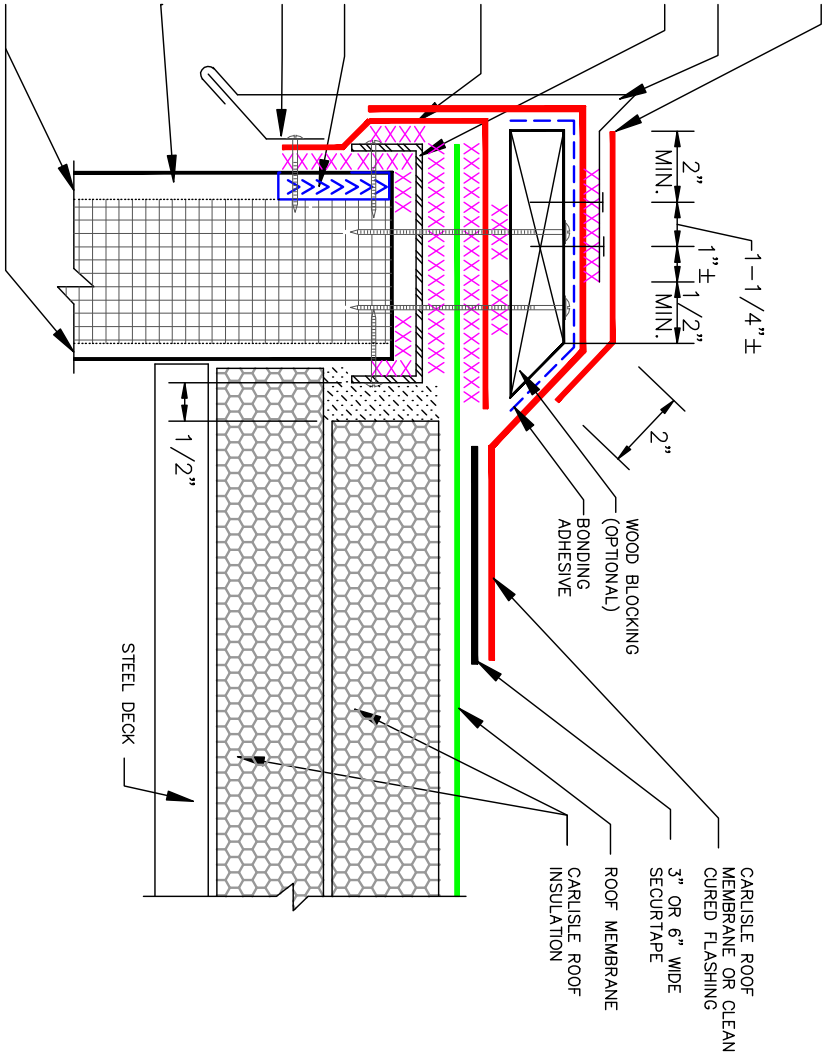

XXXXXXX	BARER SEAL-OFFER CUT-OFF MASTIC
	FOAM-IN-PLACE INSULATION

DETAIL PROVIDED COURTESY OF
GROUP 4 MATERIALS, INC.
BROOKFIELD, WISCONSIN



Carlisle SynTec Incorporated

COLD STORAGE ENVELOPE
UNIVERSAL DETAIL -
ROOF EDGE DETAIL

COLD STORAGE DETAILS
CS 1.1.2