

(A) 1-1/2" (38mm) RING SHANK NAILS @
6" (152mm) O.C. MAXIMUM

(B) HP FASTENERS @ 12" (305mm) O.C.
OR RING-SHANK NAILS @ 4" (102mm)
O.C. & STAGGERED 3/4" (19mm) O.C.

6" (152mm) WIDE
PRESSURE- SENSITIVE
CURED COVER STRIP IN
CONJUNCTION WITH
SURE-SEAL PRIMER

2" (51mm)
MIN.

SHEET METAL FASCIA (BY
OTHERS) MIN. 2" (51mm)
EXTENDED OUT

CONTINUOUS
GALVANIZED CLEAT

UNIVERSAL
SINGLE-PLY
SEALANT

6" (152mm) WIDE
PRESSURE-SENSITIVE
RUSS IN
CONJUNCTION WITH
EPDM PRIMER

HP-PURLIN FASTENERS,
REFER TO SPECS


SPONGE TUBING (BY OTHERS),
LIGHTLY ATTACHED WITH
ADHESIVE TO HOLD IN PLACE

EPDM ROOF
MEMBRANE

BONDING
ADHESIVE

CARLISLE
FASTENER & SEAM
FASTENING PLATE,
MAX. 12" (305mm)
O.C.



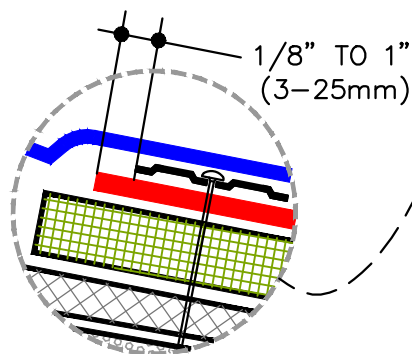

TAPERED
INSULATION
WHERE REQUIRED
TO ACHIEVE
SMOOTH
TRANSITION




NOTE:

1. DECK FLANGE MUST BE TOTALLY COVERED WITH PRESSURE-SENSITIVE CURED COVER STRIP WITH MINIMUM 2" (51mm) COVERAGE PAST FASTENER HEAD.
2. REFER TO [MR Z1.1](#) & [MR Z1.2](#) AT THE END OF THIS SECTION.

EXPANSION JOINT AT STEP DOWN CONDITION

	• HIGH DENSITY RECOVER BOARD		• ROOF MEMBRANE
	• IN-FILL INSULATION		• WOOD NAILER (BY OTHERS)
		(A) 0	• SEE DRAWING NOTE(S)



SHEET NO.

MR E3.1