



CAUTION

WHEN A PRE-MOLDED PIPE SEAL IS NOT FEASIBLE, PROJECTS WITH 25 & 30-YEAR WARRANTIES REQUIRE ALL ROUND PIPE PENETRATIONS TO BE DOUBLE WRAPPED WITH TWO LAYERS OF PRESSURE-SENSITIVE ELASTOFORM FLASHING, TERMINATED WITH A STAINLESS STEEL CLAMPING RING & SEALED WITH CONTINUOUS LAP SEALANT (AS SHOWN).

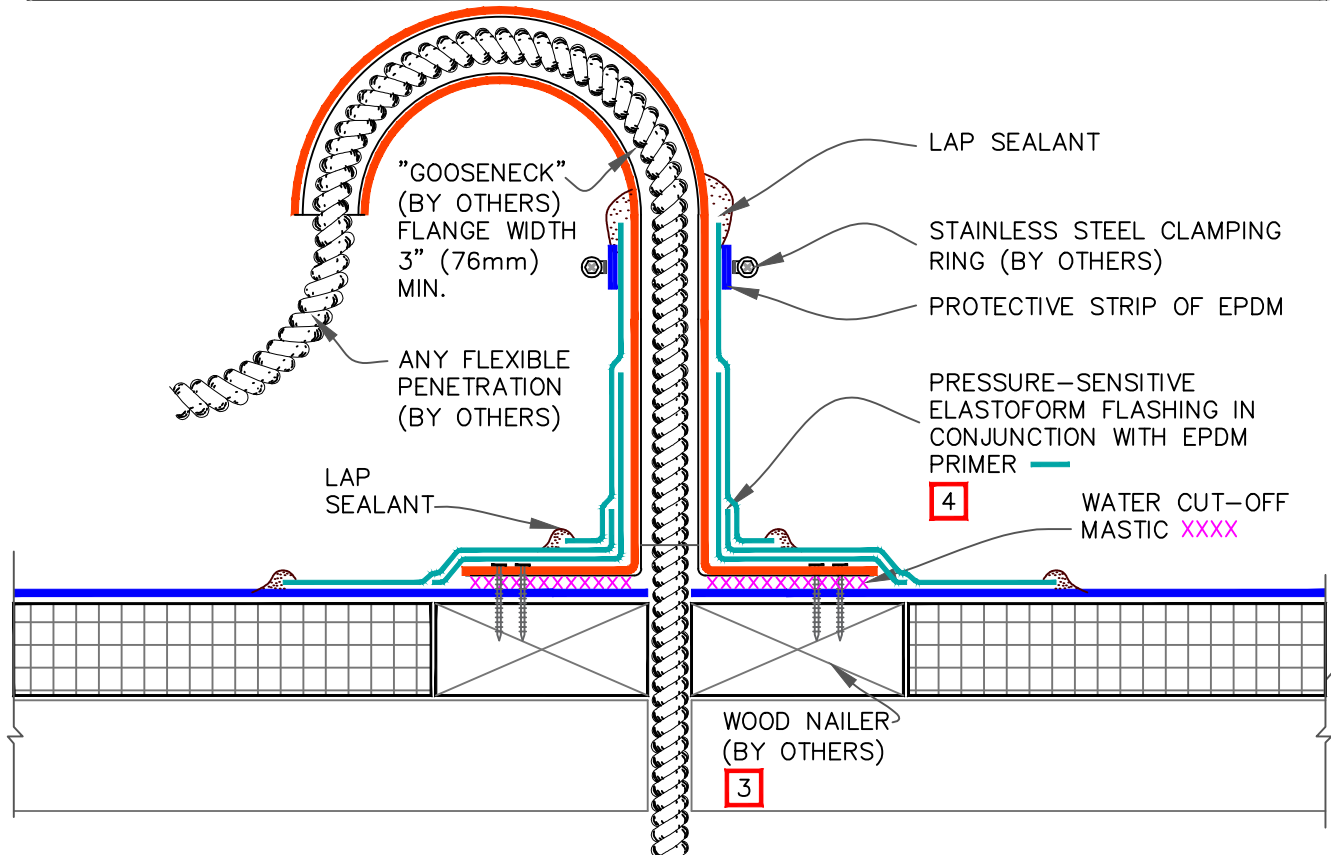

NOTES:

1. REMOVE ALL LEAD AND OTHER FLASHING BEFORE INSTALLING FIELD-FABRICATED PIPE SEAL.
2. TEMPERATURE OF PENETRATION MUST NOT EXCEED 180°F (82°C).
3. WOOD NAILERS MUST EXTEND PAST TOTAL WIDTH OF METAL FLANGE.
4. EPDM PRIMER MUST BE APPLIED TO THE MATING SURFACES PRIOR TO APPLYING PRESSURE-SENSITIVE ELASTOFORM FLASHING.
5. IN COLDER TEMPERATURES, A HEAT GUN MUST BE USED WHEN FORMING PRESSURE-SENSITIVE ELASTOFORM FLASHING.

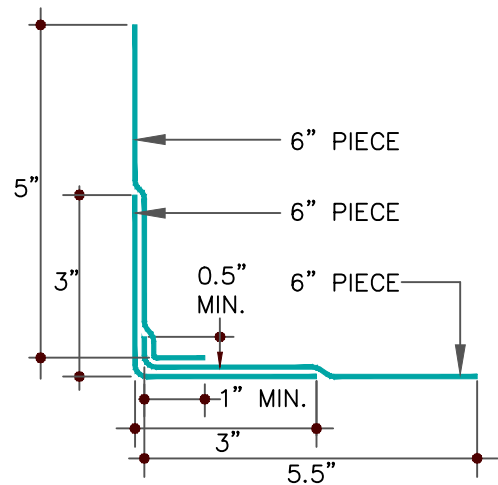

0.5"	13	5.0"	127
1.0"	25	5.5"	140
3.0"	76	6.0"	152

<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 5px; background-color: blue; margin-right: 5px;"></div> <div>• EPDM</div> </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 10px; border: 1px solid black; margin-right: 5px;"></div> <div>• APPROVED SUBSTRATE</div> </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; border: 2px solid red; margin-right: 5px;"></div> <div>• SEE NOTE(S)</div> </div>	<div style="text-align: center;">FLEXIBLE PENETRATION</div> <div style="text-align: center; font-size: small;">For additional information, refer to Specifications</div>	<div style="display: flex; align-items: center;"> <div style="border: 1px solid blue; padding: 2px; margin-right: 5px;">EPDM</div> <div style="text-align: center;"> <div style="font-size: small;">DETAIL NO.</div> <div style="font-size: large;">U-8C</div> <div style="font-size: small;">THERMOSET UNIVERSAL</div> </div> </div>
--	--	---