


NOTE: TO THIS DETAIL INSTALLATION, PRIOR TO THIS DETAIL INSTALLATION, THE DIRECTION OF WATER FLOW SHOULD BE IDENTIFIED SO EXISTING WATER FLOW IS NOT IMPEDED.

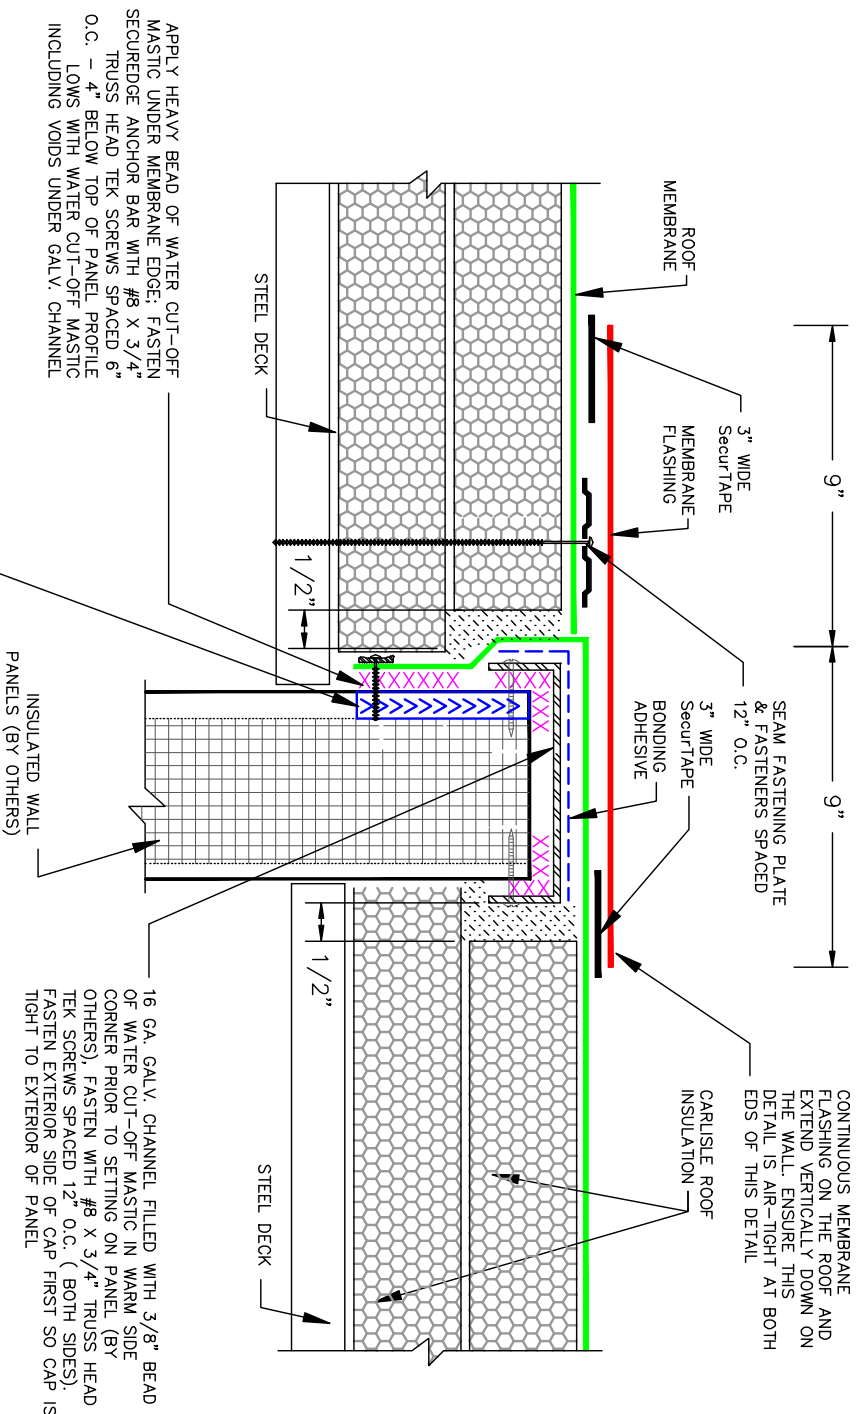

APPLY HEAVY BEAD OF WATER CUT-OFF MASTIC UNDER MEMBRANE EDGE; FASTEN SECUREDGE ANCHOR BAR WITH #8 X 3/4" TRUSS HEAD TEK SCREWS SPACED 6" O.C. - 4" BELOW TOP OF PANEL PROFILE LOWS WITH WATER CUT-OFF MASTIC INCLUDING VOIDS UNDER GALV. CHANNEL

FILL LOWS IN WALL PANEL PROFILE TO BOTTOM OF FLASHING:

OPTION A: TROWEL-GRADE POLYURETHANE SEALANT IN PANEL LOWS OR

OPTION B: WATER CUT-OFF MASTIC

DETAIL PROVIDED COURTESY OF GROUP4 MATERIALS, INC. BROOKFIELD, WISCONSIN

WARM

COLD

	SURE-SEAL WATER CUT-OFF MASTIC
	FOAM-IN-PLACE INSULATION

COLD STORAGE DETAILS

CARLISLE
Carlisle Syntec Incorporated

COLD STORAGE ENVELOPE
IWP: TRANSITION BETWEEN
COLD & WARM AREAS

CS 5.1.1