


## NOTES:

1. BALLAST RETAINING BAR MUST PROVIDE CONSTANT COMPRESSION ON WATER CUT-OFF MASTIC.
2. BALLAST RETAINING BAR MUST EXTEND ABOVE GRAVEL SURFACE SUFFICIENTLY TO RETAIN GRAVEL AND PREVENT GRAVEL MIGRATION.
3. SLOTS IN BALLAST RETAINING BAR MUST BE FLUSH OR SLIGHTLY BELOW MEMBRANE LEVEL.
4. REFER TO LOCAL CODES FOR PROPER DRAINAGE REQUIREMENTS.

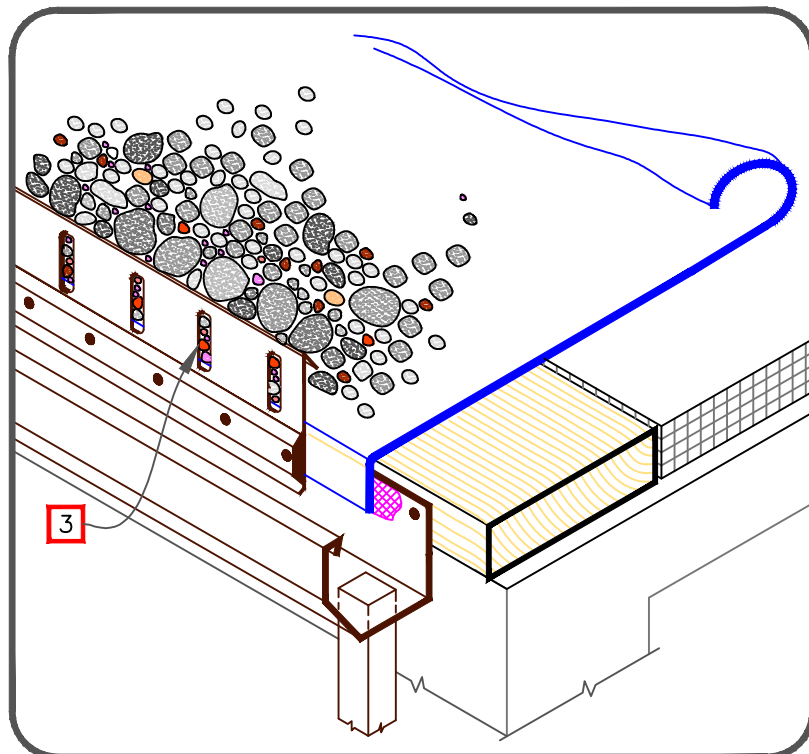

<div style="display: flex; justify-content: space-between;"> <div> <div style="width: 20px; height: 5px; background-color: blue; margin-bottom: 5px;"></div> <div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; border: 1px solid black; border-style: dashed; margin-right: 5px;"></div> <div style="border: 1px solid red; padding: 0 2px;">0</div> </div> </div> <div> <div>• EPDM</div> <div>• APPROVED SUBSTRATE</div> <div>• SEE NOTE(S)</div> </div> </div>	<div style="display: flex; justify-content: space-between;"> <div> <div>SURE-SEAL BALLAST RETAINING BAR</div> <div>For additional information, refer to Specifications</div> </div> <div> <div>DETAIL NO.</div> <div style="font-size: 24pt;">B-1D</div> <div>BALLASTED EPDM</div> </div> </div>
--	--