


DIMENSIONS		mm
(A)	3-1/2"	28
(B)	1"	25
(C)	3/4	19
(D)	4" OR 6"	102 OR 152

NOTE:

ALL 1-1/2" (38mm) RING SHANK NAILS MUST HAVE 1" (25mm) MINIMUM EMBEDMENT INTO WOOD

(A) ES-1 COMPLIANT FASCIA PROFILE

24 GAUGE (0.59 mm) THICK - 10' (3048mm) LENGTH

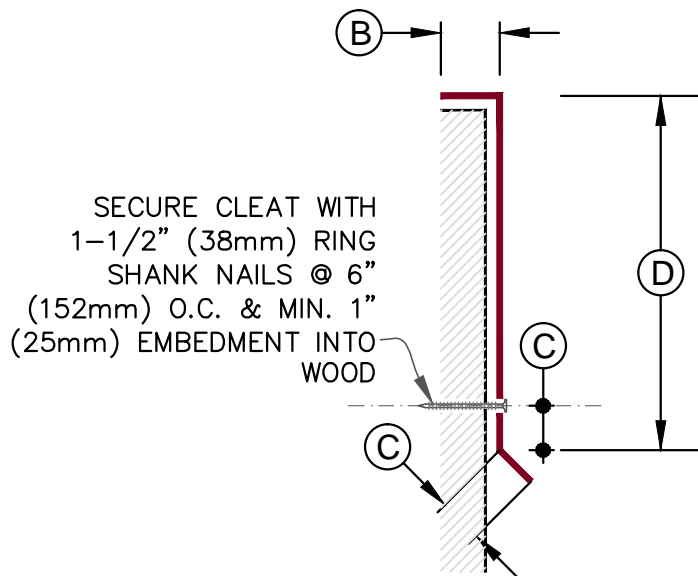

(B) GALVANIZED METAL CLEAT


22 GAUGE (0.75 mm) THICK

TABLE 1: (TEST DATA)

ES-1	COMPLIANT	
RE-1	424	PSF (POUNDS/SQUARE FOOT)
	62.62	(kilogram/sq.meter)
	614	pascals (Pa)
RE-2	435	PSF (POUNDS/SQUARE FOOT)
	64.24	(kilogram/sq.meter)
	629.95	pascals (Pa)

ANSI / SPRI ES-1 COMPLIANT FASCIA - SHOP FABRICATED

	• HIGH DENSITY RECOVER BOARD		• ROOF MEMBRANE
	• IN-FILL INSULATION		• WOOD NAILER (BY OTHERS)
			• SEE DRAWING NOTE(S)



SHEET NO.

MR Z1.2