
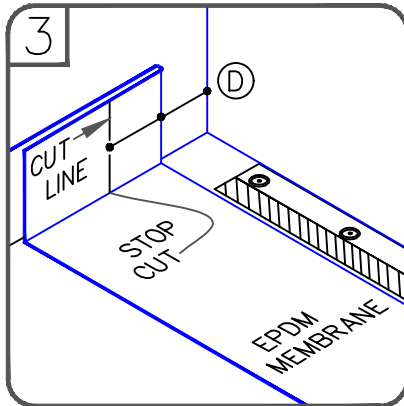


6" (152mm) WIDE PRESSURE-SENSITIVE RUSS

CARLISLE SEAM FASTENING PLATE & FASTENER.



EPDM PRIMER

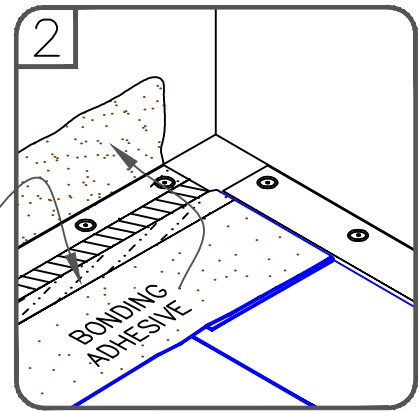

DIMENSIONS		mm	
(A)	6"	152	TO
	9"	229	
(B)	1/8"	3	MIN.
	1"	25	MAX.
(C)	12"	305	MAX.
(D)	6"	152	MIN.



NOTE:

1. PRESSURE-SENSITIVE ELASTOFORM FLASHING INSIDE / OUTSIDE CORNERS MUST BE USED.
2. AS AN OPTION, 6" (152mm) WIDE PRESSURE-SENSITIVE RUSS MAY BE FASTENED INTO THE VERTICAL SUBSTRATE, SEE DETAIL [U-12A](#).

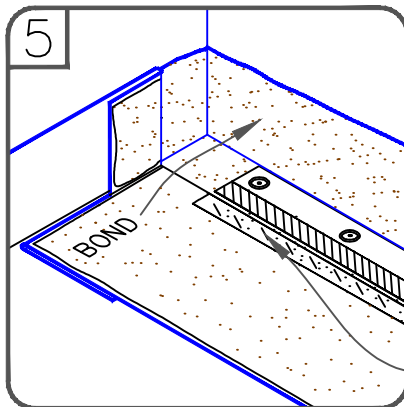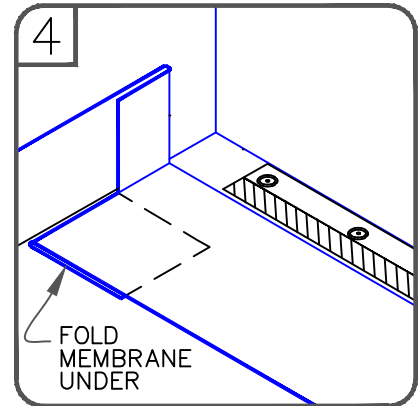



CUT 45° AND APPLY EPDM PRIMER/SecurTAPE

EPDM PRIMER

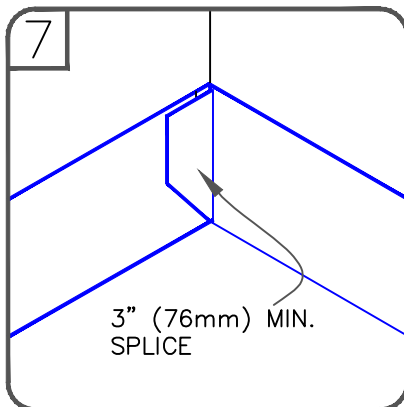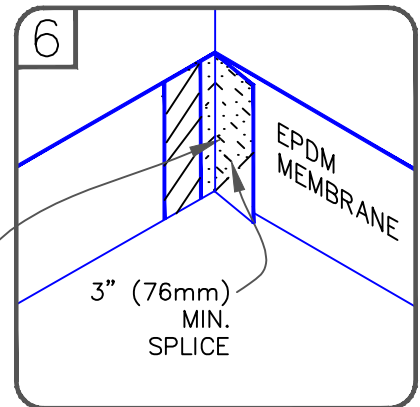

9"X9" (229mm X 229mm) PRESSURE- SENSITIVE ELASTOFORM FLASHING OR 7"X9" (178mm X 229mm) PRE-CUT PRESSURE-SENSITIVE FLASHING. [FOR PROJECTS WITH 25 AND 30-YEAR WARRANTIES OR WHEN USING 90-MIL MEMBRANE, REFER TO DETAIL U-15C.](#)

PIG EAR ON OPPOSITE WALL

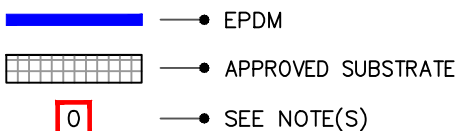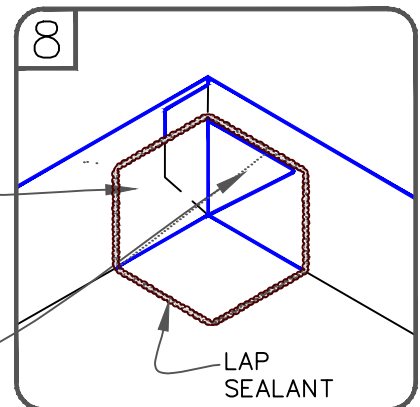

INSIDE CORNER WITH RUSS (OPTION 1)

For additional information, refer to Specifications



DETAIL NO.

U-15A

THERMOSET UNIVERSAL