

PRESSURE-SENSITIVE FLASHING, 6" MIN.

METAL GRAVEL STOP/FASCIA

16 GA. GALV. CHANNEL FILLED WITH 3/8" BEAD OF WATER CUT-OFF MASTIC IN WARM SIDE CORNER PRIOR TO SETTING ON PANEL (BY OTHERS). FASTEN WITH #8 X 3/4" TRUSS HEAD TEK SCREWS SPACED 12" O.C. ( BOTH SIDES). FASTEN EXTERIOR SIDE OF CAP FIRST SO CAP IS TIGHT TO EXTERIOR OF PANEL

ROOF MEMBRANE

OPTION A: TROWEL-GRADE POLYURETHANE SEALANT IN PANEL LOWS OR  
OPTION B: WATER CUT-OFF MASTIC


FASTEN MEMBRANE EDGE WITH 1/8"THICK X 1" WIDE TERMINATION BAR WITH #8 X 3/4" TEK SCREWS 6" O.C. TO CAP

2" WIDE, TGM 3500 TAPE

CONTINUOUS SHEET METAL CLIP

INSULATED WALL PANELS (BY OTHERS)

INSULATED WALL PANELS LOWS

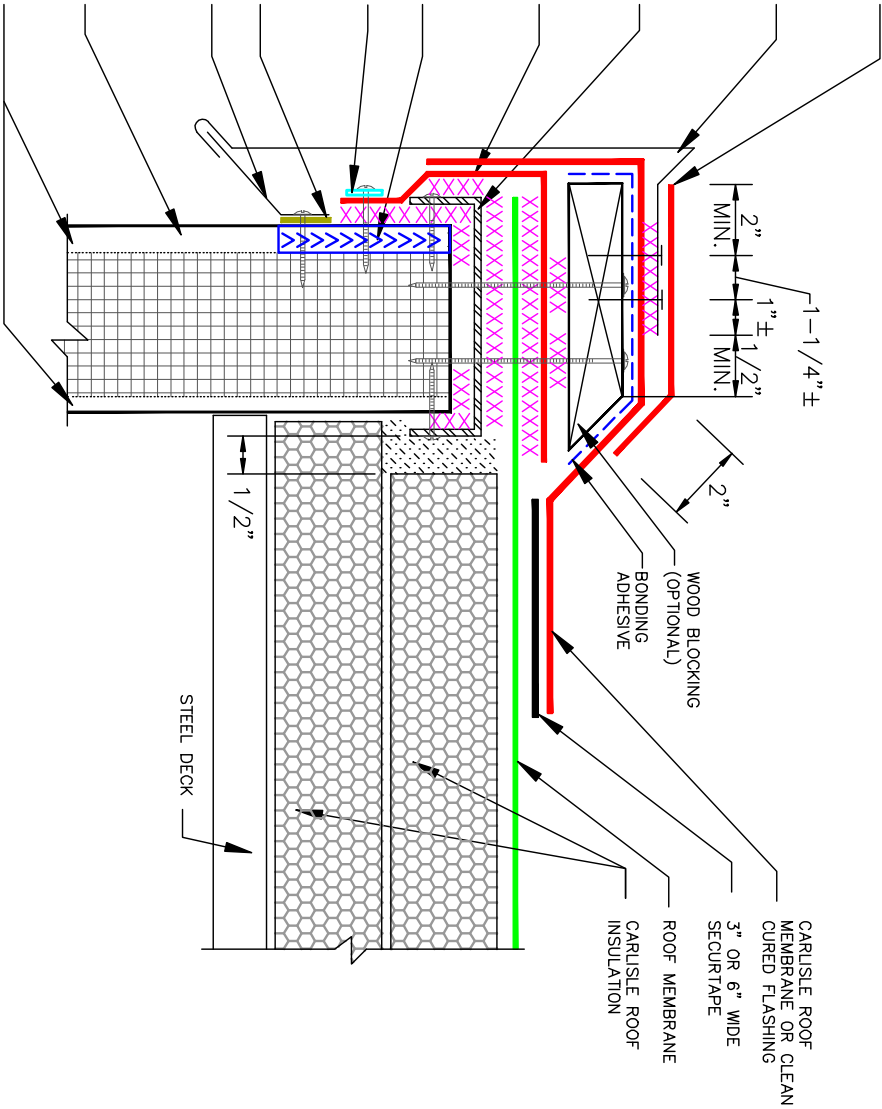

XXXXXXX	SURE-SEAL WATER CUT-OFF MASTIC
	FOAM-IN-PLACE INSULATION

DETAIL PROVIDED COURTESY OF  
GROUP4 MATERIALS, INC.  
BROOKFIELD, WISCONSIN



Carlisle SynTec Incorporated

**COLD STORAGE ENVELOPE  
UNIVERSAL DETAIL -  
ROOF EDGE DETAIL**

**CS 1.1.3**

COLD STORAGE DETAILS