
AUGUST 1, 2016

FLOOR TRUSS BLOCKING DETAIL

MII-LEDGR2A

Page 1 of 1

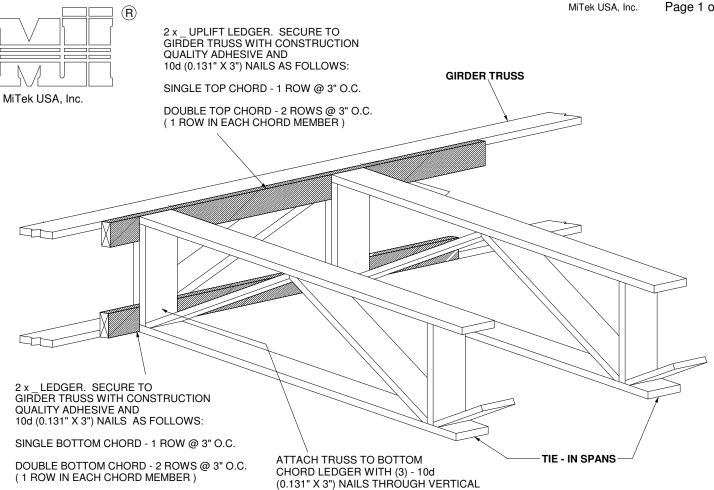

	MAX. LOAD APPLIED TO LEDGER (PLF)		
	SP	DOUG-FIR	SPF/HF
SINGLE CHORD	404	372	316
DOUBLE CHORD	808	744	632

NOTE: VALUES BASED ON FOLLOWING VALUES SP = 101#/nail DF = 93#/nail SPF = 79#/nail

~	\sim	$\sim\sim\sim$			
	No Exception Taken	Rejected			
- [☐ Make Corrections as Noted	☐ Submit Specified Item			
_ [Revise and Resubmit	☐ Not Reviewed			
	Submittal is reviewed only as to general conformity with design concept of the project and general compliance with the information given in the Contract Documents. Cornections and/or comments made as part of this submittal review do not relieve contractor of responsibility from conformance with the Contract Documents, applicable codes, and laws - all of which have priority over this submittal. The edsign professional does not warman or represent that the information within the submittal is either accurate or complete. Sole responsibility for correct design, details, and dimensions shall remain with the party providing the submittal. Contractor is responsible for all dimensions, quantifies and performance requirements to be confirmed and correlated at the job site; for all information that perfairs solely to the fabrication processes or to techniques of construction; for all coordination of the work of all trades; for assuring consistency with the Contract Documents; and for performing the work in a safe and saffactorry manner.				
-		opening design			
-	Reviewed by: Luis C. Pérez Tato Kurt Frey	Date: 02.28.2019			
minimum particular de la company de la compa					