

- OUT
 BEAM w/ (2)
 TINUOUS

WALL

ATTACH FLOOR SHEATHING
 TO LEDGER w/ 10d AT 6" o/c

-FINISH FLOOR: $1\frac{1}{2}"$ FINISH GRADE PLY-
 -SOUND MAT
 - $1\frac{1}{2}"$ OSB PLYWOOD BONDED w/ EXT. G.
 - $1\frac{1}{2}"$ OSB PLYWOOD BONDED w/ EXT. G.
 SEAL/STAIN w/ LVLS

T.O. SHEATHING
 ELEV. SEE PLANS

3 $1\frac{1}{2}"$ JOISTS AT 32" o/c


CONT. 3 $1\frac{1}{2}"$ BOLT TO MASONRY
 w/ SIMPSON TITEN HD ANCHORS AT
 24" o/c. STAGGERED (EMBED 3 5/8"
 MINIMUM) GROUT MASONRY WALL
 SOLID AR ANCHORS

CORRIDOR JOISTS PARALLEL TO CMU WALL

[illegible]

S211

S211

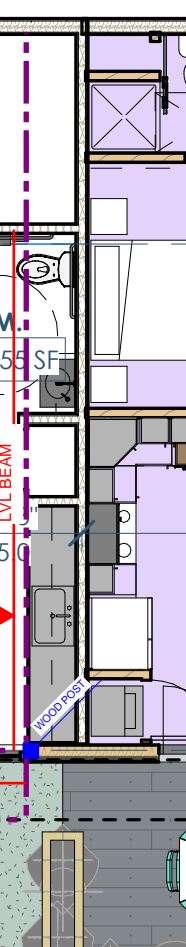

Description
75% CD Set
Permit

S211