


C

B

A

2 1/2" GAP ABOVE FOR BEAM ROTATION

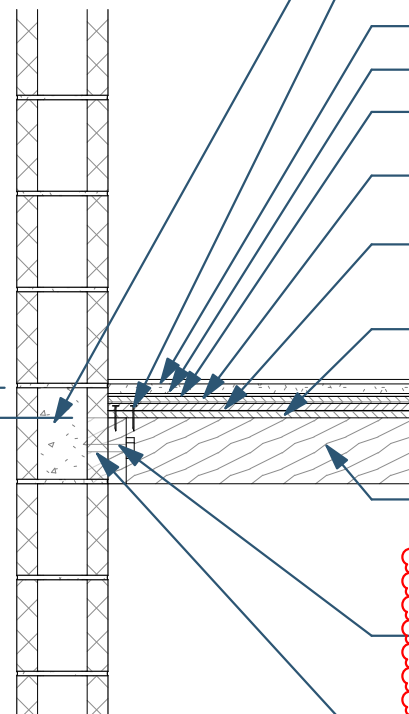

KNOCK OUT BOND BEAM - SEE
ELEVATOR ELEVATIONS FOR SIZE
AND REBAR

ATTACH FLOOR SHEATHING TO
4X6 JOIST AND LEDGER W/10D
NAILS @ 6" O.C. (TAKE CARE TO
NOT EXPOSE FASTENERS TO
FINISH SPACE)

04.15.2020

FLOOR FINISH T.B.D (3/8" ZONE)

25/32" GYP. CRETE

1/4" SOUND MAT

19/32" OSB PLYWOOD BONDED
W/ EXT. GLUE

19/32" OSB PLYWOOD BONDED
W/ EXT. GLUE

19/32" OSB PLYWOOD BONDED
W/ EXT. GLUE - PAINT DARK
GRAY

4X6 SOUTHERN PINE - NO. 1 -
32" O.C. - PAINTED DARK GRAY


04.15.2020

2X6 TREATED BLOCKING
BETWEEN JOISTS - 5/8" TITEN HD
SCREWS 16" O.C. (4" MIN.
EMBED) - GROUT CORE SOLID
AT ANCHORS

NOTCH 4X6 INTO CMU - 2" MIN.
BEARING (SEPARATE FROM CMU
WITH STEEL SHIM OR FELT PAPER

5
S212

CORRIDOR JOISTS BEARING ON CMU WALL
3/4" = 1'-0"

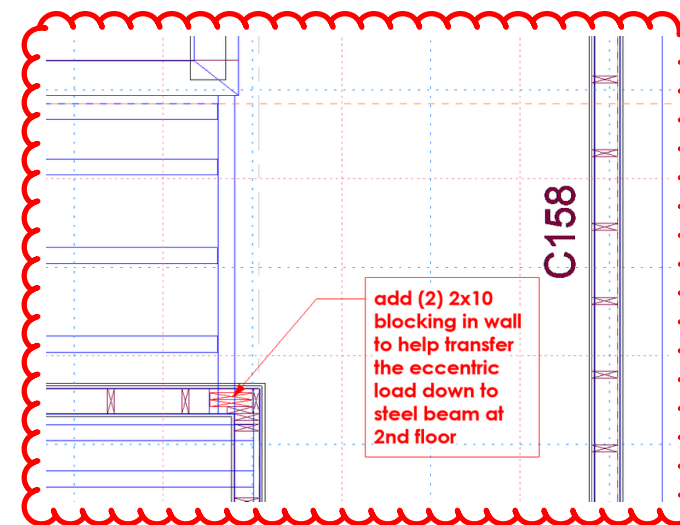

RCP - 2ND FLOOR

C

B

A



Architect: OpeningDesign

316 W. Washington Ave. | Suite 675 | Madison, WI 53703

ryan@openingdesign.com | 773.425.6456

CANNERY TRAIL RESIDENCES
1750 N OXFORD AVE. - EAU CLAIRE, WI
Z-11 - 20200415 - CLARIFYING DETAILS AROUND ELEVATOR SHAFT

Date	Description
04.15.2020	CLARIFYING DETAILS AROUND ELEV SHAFT