

US008066097B2

(12) United States Patent Boyadjian et al.

(10) Patent No.: US 8,066,097 B2 (45) Date of Patent: Nov. 29, 2011

(54)	ACOUSTIC ENHANCEMENT DEVICE FOR
	UNDERLAYMENT OF A COVERING

(75)	Inventors:	Pierre Boyadjian, Chambery (FR);
		David Fournier, Breteuil (FR); Serge
		D' ' (ED)

Rimlinger, Seyssinet Pariset (FR); Michele Curt, Peronnas (FR); Cedric Chaveyriat, Ceyzeriat (FR)

(73) Assignee: Saint-Gobain Weber France, Servon

(FR)

(*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

(21) Appl. No.: 12/506,537

(22) Filed: Jul. 21, 2009

(65) Prior Publication Data

US 2010/0018799 A1 Jan. 28, 2010

(30) Foreign Application Priority Data

Jul. 24, 2008 (FR) 08 55084

(51) **Int. Cl.**

E04B 1/14 (2006.01)

(52) **U.S. Cl.** **181/290**; 181/285; 181/286

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

4,488,619	Α	4	12/1984	O'Neill	181/290
5,483,028	A	*	1/1996	Holwerda	181/207

5,554,830	A *	9/1996	Muller et al 181/290
5,814,170	A *	9/1998	Shibusawa et al 156/62.2
5,916,681	A *	6/1999	Cipin 428/403
6,145,617	A *	11/2000	Alts 181/290
7,201,253	B2 *	4/2007	Duval et al 181/204
7,320,739	B2 *	1/2008	Thompson et al 156/308.2
7,322,440	B2 *	1/2008	Khan et al 181/286
2002/0088193	A1*	7/2002	Reimers et al 52/403.1
2004/0154240	A1*	8/2004	Hiraguri et al 52/144
2005/0150720	A1*	7/2005	Tudor et al 181/286
2005/0214500	A1*	9/2005	Hallows 428/77
2006/0131103	A1*	6/2006	Fuller et al 181/290
2007/0119651	A1*	5/2007	Mori et al 181/290
2007/0227090	A1*	10/2007	Plante 52/506.01
2007/0289238	A1*	12/2007	Payne et al 52/408

FOREIGN PATENT DOCUMENTS

JP 05248076 A * 9/1993 JP 11293810 A * 10/1999

OTHER PUBLICATIONS


Machine translation of JP 05248076 A.*

Primary Examiner — Jeremy Luks (74) Attorney, Agent, or Firm — Oblon, Spivak, McClelland, Maier & Neustadt, L.L.P.

(57) ABSTRACT

An acoustic enhancement device adapted for being placed on a support and under a covering, and containing a first flexible layer adapted for being placed facing the support, a second rigid layer joined to the first flexible layer and adapted for being placed opposite the support, and a damping element, wherein the damping element is integrated in the second rigid layer or forms a third layer placed on the second rigid layer and opposite the first flexible layer.

17 Claims, 3 Drawing Sheets

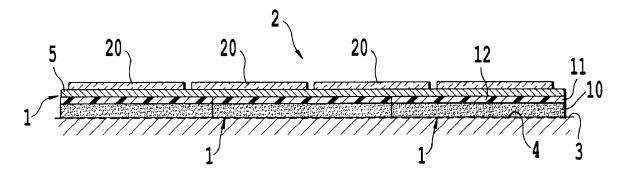

^{*} cited by examiner