

THA Series Architectural Mul-T-Mount Electric Infrared Heater

82

3-Lamp Mul-T-Mount Series - Nickel Gray Housing With (3) Clear 8mm Quartz Lamps and Amber Gray Sleeves Included



**Heavy Duty Extruded
Aluminum Housing**
Glare Reduction Element & Sleeve
Combination Heater Series



WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.

- ETL C/US listed for suspended, totally exposed outdoor and indoor spot comfort heating applications, including exterior snow/ice control applications
- Clear quartz lamp heating elements, offered in both 2-lamp and 3-lamp heaters that operate on 208, 240, or 480 volt
- Gold anodized one-piece reflector offered in 30°, 60°, or 90° symmetrical patterns for various distribution of infrared heat
- 6063 extruded aluminum housing, with a painted powder coated nickel gray finish
- Housing is extremely durable and attractively designed for commercial applications
- All 3-lamp heaters wire for either single or three-phase wiring.
- ~~2-lamp heaters wire for single-phase operation~~
- Includes surface mounting brackets & glare reducing sleeves to eliminate 94% of the quartz lamp lumen output
- Made in the USA

NICKEL GRAY HOUSING		KW	BTUs	VOLTS	REFLECTOR PATTERN	8mm DIAMETER REPLACEMENT LAMP	WT. (LBS)
MFG CATALOG NUMBER	MFG MODEL NUMBER						
04896202	223-30-THA-208V	4.8	16382	208	30° Symmetrical	04912802	25
04896302	223-30-THA-240V			240		04912902	
04896402	223-30-THA-277V			277		04913002	
04896502	223-30-THA-480V			480		04913102	
04896602	223-60-THA-208V			208	60° Symmetrical	04912802	
04896702	223-60-THA-240V			240		04912902	
04896802	223-60-THA-277V			277		04913002	
04896902	223-60-THA-480V			480		04913102	
04897002	223-90-THA-208V			208	90° Symmetrical	04912802	
04897102	223-90-THA-240V			240		04912902	
04897202	223-90-THA-277V			277		04913002	
04897302	223-90-THA-480V			480		04913102	
04897402	343-30-THA-208V			208	30° Symmetrical	04913202	
04897502	343-30-THA-240V			240		04913302	
04897602	343-30-THA-480V			480		04913502	
04897702	343-60-THA-208V	7.5	25298	208	60° Symmetrical	04913202	33
04897802	343-60-THA-240V			240		04913302	
04897902	343-60-THA-480V			480		04913502	
04898002	343-90-THA-208V			208	90° Symmetrical	04913202	
04898102	343-90-THA-240V			240		04913302	
04898202	343-90-THA-480V			480		04913502	
04898302	463-30-THA-480V	10.95	37372	480	30° Symmetrical	04913602	41
04898402	463-60-THA-480V				60° Symmetrical	04913602	
04898502	463-90-THA-480V				90° Symmetrical	04913602	

NOTE:

- All THA models have the same housing dimensions and require the same mounting clearances as the TH/THSS models; see page 76
- See page 77 for sizing chart information
- Asymmetrical pattern units are also available for 30° & 60°, contact factory for more information

TH & THSS Series Mul-T-Mount Electric Infrared Heater


76

Overhead Infrared Heaters for Snow and Ice Control,
Outdoor Spot Heating, and All Indoor Heating Applications



Product Description

AVAILABLE IN 2 OR 3 LAMP BANKERS BRONZE
OR STAINLESS STEEL FINISH

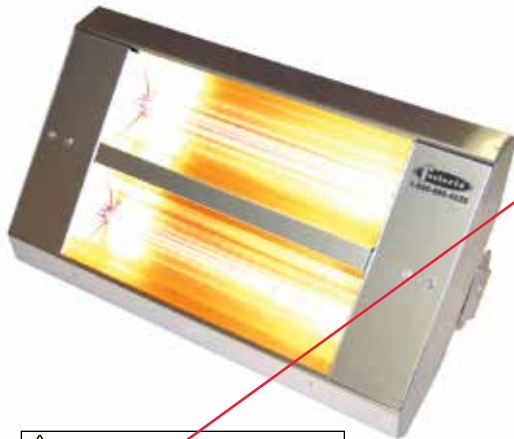

WARNING: This product can expose you to chemicals including nickel which is known to the State of California to cause cancer, and chromium, which is known to the State of California to cause birth defects and/or reproductive harm. For more information go to www.P65Warnings.ca.gov.




- Listed for suspended, totally exposed (outdoor), high-bay (indoor) comfort heating and exterior snow & ice control applications
- Listed for recessed applications
- 20 gauge powder coated steel or stainless steel housings
- Gold anodized Aluminum reflectors & end caps
- 50% higher wattage densities for 3-element units
- 2-Lamp wiring, single phase
- 3-Lamp wiring, three or single phase
- Stainless steel models have non-corrosive housing, hardware and brackets; no ferrous metals used in the unit. Durable in harsh atmospheres & outdoor environments
- High temperature lead wires
- Clear 12mm diameter Quartz Lamp(s) Included
- Elements provide a bright light, generating 8-lumens per watt
- Made in U.S.A.

Features:


In-Built surface mounting brackets allows for fixture adjustment up to 45° horizontal tilt

In-built surface mounting brackets attached to the top wiring channel

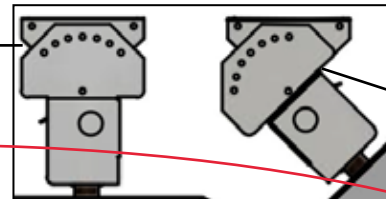

0 to 45° tilt @ 15° increments

Product Dimensions

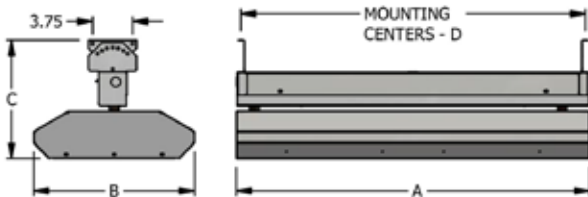

MUL-T-MOUNT SERIES	DIMENSIONS (IN.)			
	"A" LENGTH	"B" WIDTH	"C" HEIGHT	"D" MTG.CTR.
222	24"	15"	11"	23 1/2"
223	24"	21 1/2"	11"	23 1/2"
342	33"	15"	11"	32 1/2"
343	33"	21 1/2"	11"	32 1/2"
462	46"	15"	11"	45 1/2"
463	46"	21 1/2"	11"	45 1/2"

Mounting Clearances & Recommended Mounting Height

Mounting Clearances		Recommended Mounting Height	
2 & 3 Lamp Models	3" from ceiling	30° Symmetric & A30° Asymmetric Reflector - Indoor	14' - 30'
	24" from vertical surface	60° Symmetric & A60° Asymmetric Reflector - Indoor	12' - 18'
2 Lamp Models	72" from face of heater to combustible surface	90° Symmetric Reflector - Indoor	8' - 12'
3 Lamp Models	96" from face of heater to combustible surface	30° Symmetric & A30° Asymmetric Reflector - Outdoor	8' - 10'


TH & THSS Series Mul-T-Mount Electric Infrared Heater

77


Reflector Patterns




30° Symmetric




30° Asymmetric



60° Symmetric



60° Asymmetric



90° Symmetric

Product Specifications

Series:

222, 342, 462 (Painted Version) 2-lamp — TH Series

222, 342, 462 (Stainless Steel Version) 2-lamp — THSS Series

223, 343, 463 (Stainless Steel Version) 3-lamp — THSS Series

Housing:

20 gauge Galvanized Steel with baked on bankers bronze powder coated finish. 20 gauge Stainless Steel for durability and corrosion-resistance. Both housings are ETL Listed for either indoor and totally exposed outdoor applications.

Reflectors and End Caps:

.040 Gold anodized Aluminum reflectors and end caps for superior reflectivity. Five choices of reflector patterns including 30 degree narrow (symmetric & asymmetric), 60 degree medium (symmetric & asymmetric), and 90 degree wide (symmetric). THSS models have stainless steel endcaps.

Elements:

Clear quartz lamps. Coiled tungsten filament located within a sealed quartz envelope, halogen filled, with porcelain end caps and 6" wire pigtail leads. Elements are 12mm in diameter and deliver a 96% radiant efficiency with high moisture and thermal shock resistance. Instantaneous heat-up and cool-down performance. Available wattages from 1600 to 3650 Watts per element. Available voltages from 208 to 600 Volts.

Controls:

Mul-T-Mount heaters are not manufactured with any control device on the unit. All controls are accessories and should be specified as such. Please consult the technical sales department of factory for help in determining applicable controls. Please follow installation instructions that accompany each heater.

Accessories:

Recessed mounting frames (painted or stainless steel), adjustable mounting brackets (stainless steel only), vertical mounting brackets (stainless steel only), wire guards, thermostats, snow detectors, SCR controllers, and power contactor panels (ICP Series).

Sizing Chart

Reflective Pattern (°)	Heater Output (kW)	# of Qtz. Lamps	Mounting Heights (FT.)							Watts Delivered per Square Foot						
			8	10	12	14	16	18	20	Mounting Heights (FT.)						
			Heat Pattern Coverage at Floor Level							8	10	12	14	16	18	20
			L x W	L x W	L x W	L x W	L x W	L x W	L x W							
30°	3.2	2 - Quartz Lamp Heaters	5.5 x 4	6.5 x 5.5	7.5 x 6.5	8.5 x 7.5	9.5 x 8.5	10.5 x 9.5	11.5 x 10.5	145.5	89.5	65.6	50.2	39.6	32.1	26.5
60°	3.2		10.5 x 9.5	13 x 12	15 x 14	17 x 16	N / R	N / R	N / R	32.1	20.5	15.2	11.8	-	-	-
90°	3.2		17 x 16	21 x 20	N / R	N / R				11.8	7.6	-	-	-	-	-
30°	5.0		6 x 4	7.5 x 5.5	8.5 x 6.5	9.5 x 7.5	10.5 x 8.5	11.5 x 9.5	12.5 x 10.5	208.3	121.2	90.5	70.2	56.0	45.8	38.1
60°	5.0		11.5 x 9.5	14 x 12	16 x 14	18 x 16	20.5 x 18.5	23 x 21	N / R	45.8	29.8	22.3	17.4	13.2	10.4	-
90°	5.0		18 x 16	22 x 20	26 x 24	N / R	N / R	N / R		17.4	11.4	8.0	-	-	-	-
30°	7.3		N / R	8.5 x 5.5	9.5 x 6.5	10.5 x 7.5	11.5 x 8.5	12.5 x 9.5	13.5 x 10.5	-	156.1	118.2	92.7	74.7	61.5	51.5
60°	7.3		12 x 10.5	15 x 12	17 x 14	19 x 16	21.5 x 18.5	24 x 21	N / R	57.9	40.6	30.7	24.0	18.4	14.5	-
90°	7.3		19 x 16	23 x 20	27 x 24	N / R	N / R	N / R		24.0	15.9	11.3	-	-	-	-
30°	4.8	3 - Quartz Lamp Heaters	5.5 x 5	6.5 x 6.5	7.5 x 7.5	8.5 x 8.5	9.5 x 9.5	10.5 x 10.5	11.5 x 11.5	174.5	113.6	85.3	66.4	53.2	43.5	36.3
60°	4.8		10.5 x 10.5	13 x 13	15 x 15	17 x 17	21 x 21	N / R	N / R	43.5	28.4	21.3	16.6	10.9	-	-
90°	4.8		17 x 17	21 x 21	N / R	N / R	N / R			16.6	10.9	-	-	-	-	-
30°	7.5		N / R	7.5 x 6.5	8.5 x 7.5	9.5 x 8.5	10.5 x 9.5	11.5 x 10.5	12.5 x 11.5	-	153.8	117.6	92.9	75.2	62.1	52.2
60°	7.5		11.5 x 10.5	14 x 13	16 x 15	18 x 17	20.5 x 19.5	23 x 22	N / R	62.1	41.2	31.3	24.5	18.8	14.8	-
90°	7.5		18 x 17	22 x 21	26 x 25	N / R	N / R	N / R		24.5	16.2	11.5	-	-	-	-
30°	10.95		N / R	8.5 x 6.5	9.5 x 7.5	10.5 x 8.5	11.5 x 9.5	12.5 x 10.5	13.5 x 11.5	-	198.2	153.7	122.7	100.2	83.4	70.5
60°	10.95		12 x 11	15 x 13	17 x 15	19 x 17	21.5 x 19.5	24 x 22	N / R	83.0	56.2	42.9	33.9	26.1	20.7	-
90°	10.95		19 x 17	23 x 21	27 x 25	N / R	N / R	N / R	N / R	33.9	22.7	16.2	-	-	-	-

NOTE: This chart provides the same heat pattern coverage for all Mul-T-Mount Heater Series regardless of housing materials, added sleeve, or element diameter.