


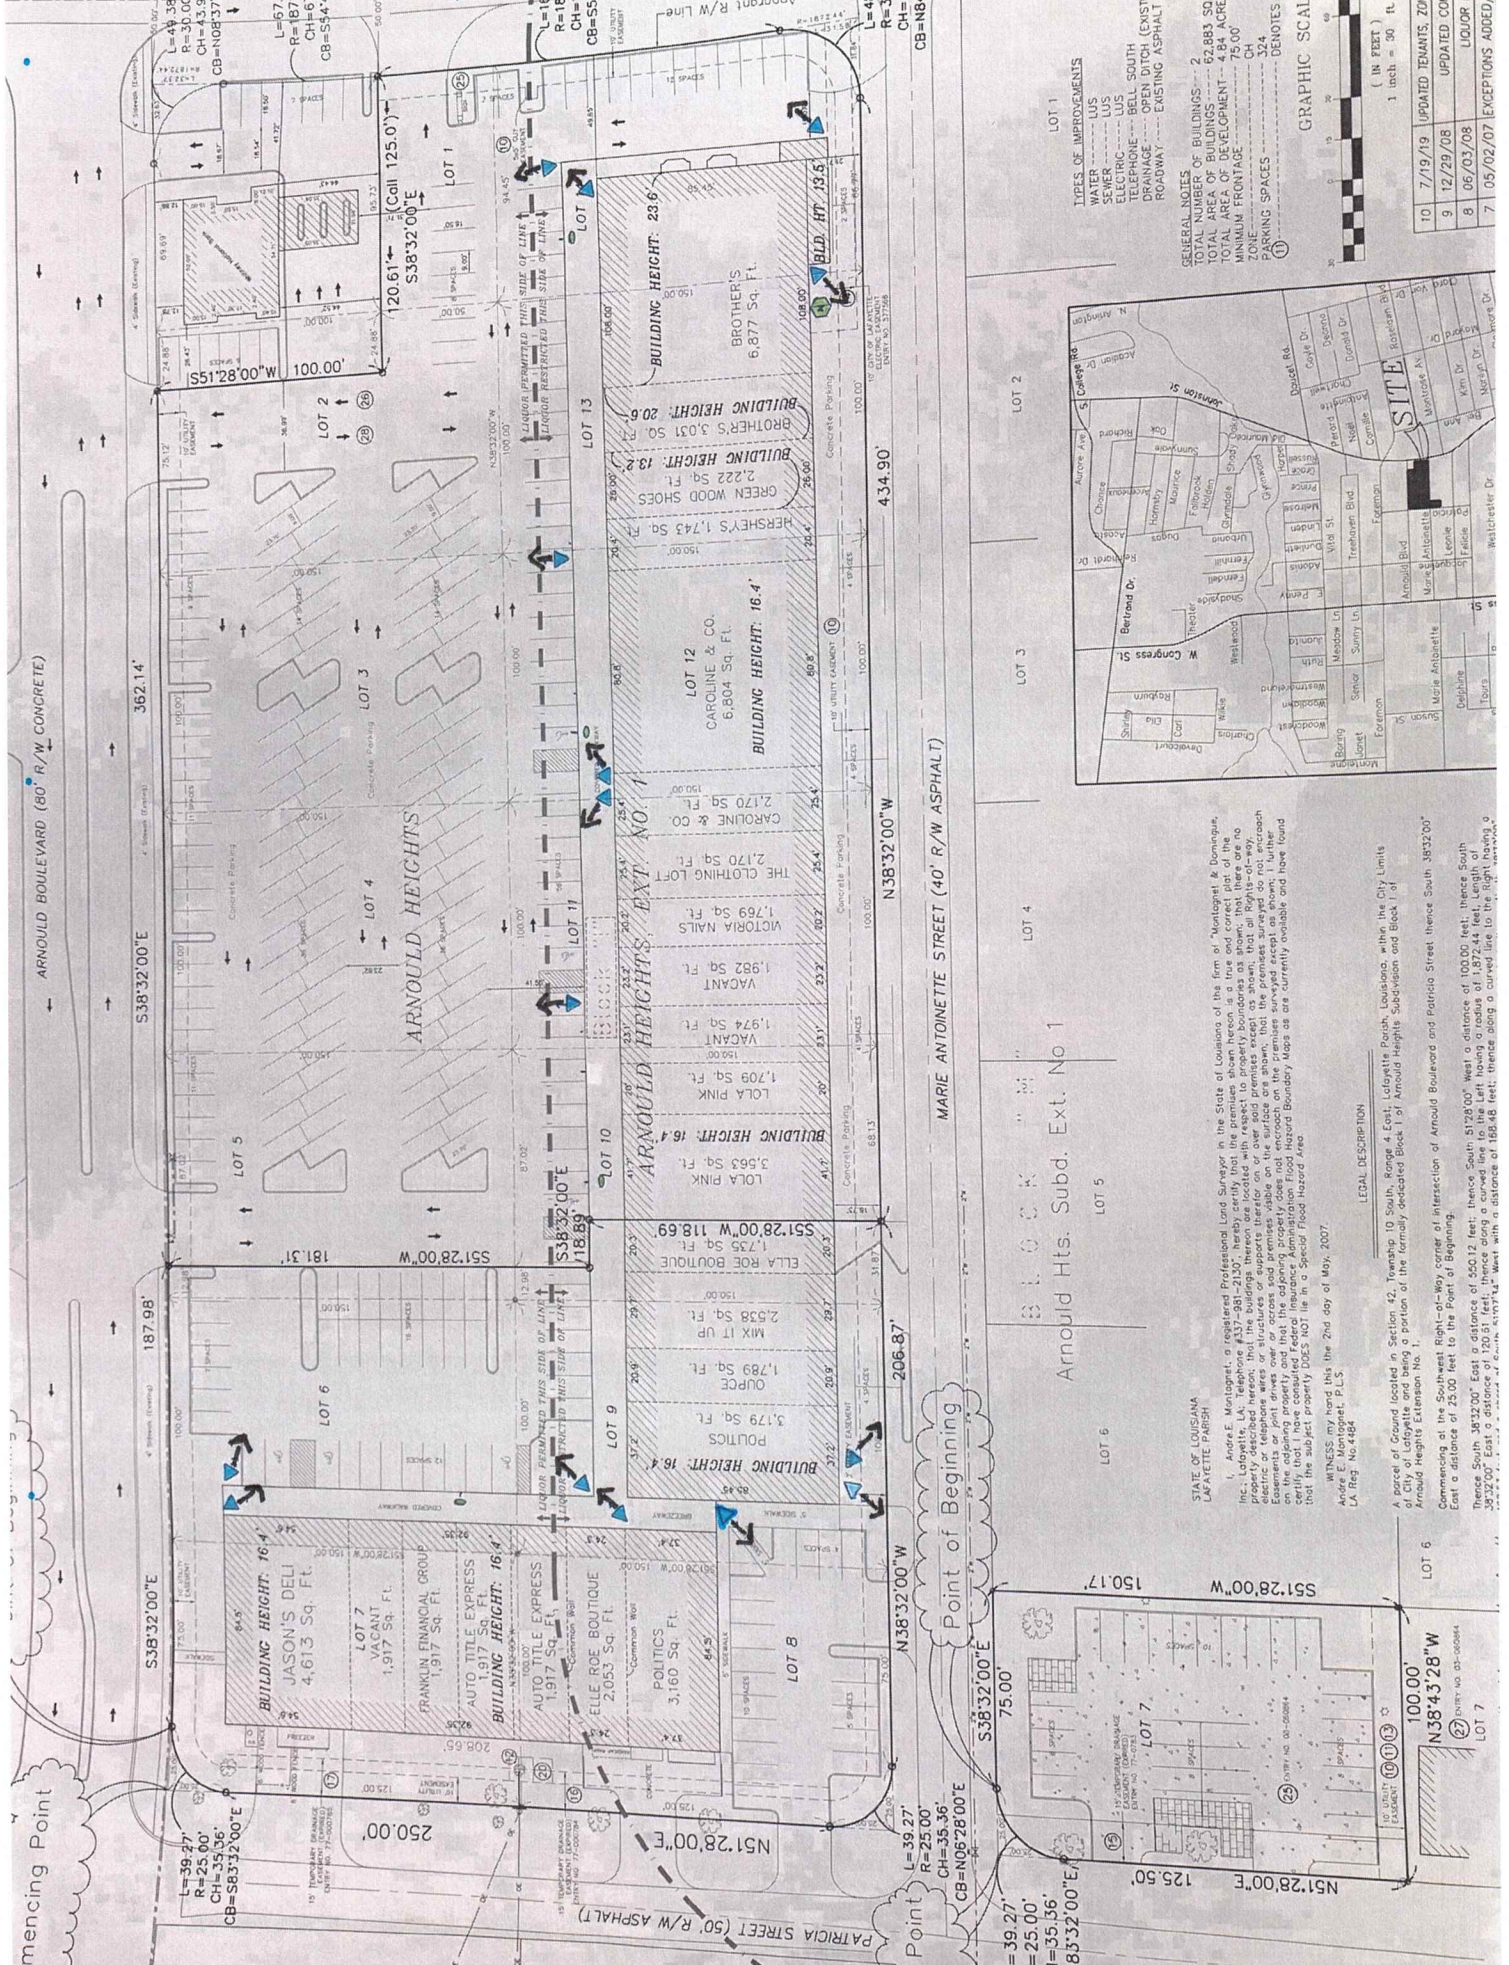

STATE OF LOUISIANA
LAFAIETTE PARISH

I, Andre E. Manigault, a registered Professional Land Surveyor in the State of Louisiana, do hereby certify that I have personally surveyed and laid out the above described property, and that the same is in accordance with the laws of the State of Louisiana, and that the same is in accordance with the laws of the State of Louisiana, and that the same is in accordance with the laws of the State of Louisiana.

LEGAL DESCRIPTION
A parcel of ground located in Section 42, Township 10 South, Range 4 East, Calcasieu Parish, Louisiana, within the City Limits of Calcasieu Parish, Louisiana, and being a portion of the formerly dedicated Block 1 of Arnold Heights Subdivision and Block 1 of Arnold Heights Extension No. 1, containing 4.84 acres, more or less, as shown on the plat of said subdivision and extension, and as the same appears on the official records of the parish clerk of Calcasieu Parish, Louisiana, to-wit: the plat of said subdivision and extension, and as the same appears on the official records of the parish clerk of Calcasieu Parish, Louisiana, to-wit: the plat of said subdivision and extension, and as the same appears on the official records of the parish clerk of Calcasieu Parish, Louisiana, to-wit: the plat of said subdivision and extension.

Point of Beginning
Arnold Hts. Subd. Ext. No 1

Point of Beginning
Arnold Hts. Subd. Ext. No 1

Point of Beginning
Arnold Hts. Subd. Ext. No 1

GENERAL NOTES
NUMBER OF BUILDINGS: 2
TOTAL AREA OF BUILDINGS: 62,883 SQ. FT.
TOTAL AREA OF DEVELOPMENT: 4.84 ACRES
MINIMUM FRONTAGE: 75.00'
ZONE: S-1
PARKING SPACES: 574
DENOTES TITLE

GENERAL NOTES
NUMBER OF BUILDINGS: 2
TOTAL AREA OF BUILDINGS: 62,883 SQ. FT.
TOTAL AREA OF DEVELOPMENT: 4.84 ACRES
MINIMUM FRONTAGE: 75.00'
ZONE: S-1
PARKING SPACES: 574
DENOTES TITLE

GENERAL NOTES
NUMBER OF BUILDINGS: 2
TOTAL AREA OF BUILDINGS: 62,883 SQ. FT.
TOTAL AREA OF DEVELOPMENT: 4.84 ACRES
MINIMUM FRONTAGE: 75.00'
ZONE: S-1
PARKING SPACES: 574
DENOTES TITLE

LEGAL DESCRIPTION
A parcel of ground located in Section 42, Township 10 South, Range 4 East, Calcasieu Parish, Louisiana, within the City Limits of Calcasieu Parish, Louisiana, and being a portion of the formerly dedicated Block 1 of Arnold Heights Subdivision and Block 1 of Arnold Heights Extension No. 1, containing 4.84 acres, more or less, as shown on the plat of said subdivision and extension, and as the same appears on the official records of the parish clerk of Calcasieu Parish, Louisiana, to-wit: the plat of said subdivision and extension, and as the same appears on the official records of the parish clerk of Calcasieu Parish, Louisiana, to-wit: the plat of said subdivision and extension.

LEGAL DESCRIPTION
A parcel of ground located in Section 42, Township 10 South, Range 4 East, Calcasieu Parish, Louisiana, within the City Limits of Calcasieu Parish, Louisiana, and being a portion of the formerly dedicated Block 1 of Arnold Heights Subdivision and Block 1 of Arnold Heights Extension No. 1, containing 4.84 acres, more or less, as shown on the plat of said subdivision and extension, and as the same appears on the official records of the parish clerk of Calcasieu Parish, Louisiana, to-wit: the plat of said subdivision and extension, and as the same appears on the official records of the parish clerk of Calcasieu Parish, Louisiana, to-wit: the plat of said subdivision and extension.

LEGAL DESCRIPTION
A parcel of ground located in Section 42, Township 10 South, Range 4 East, Calcasieu Parish, Louisiana, within the City Limits of Calcasieu Parish, Louisiana, and being a portion of the formerly dedicated Block 1 of Arnold Heights Subdivision and Block 1 of Arnold Heights Extension No. 1, containing 4.84 acres, more or less, as shown on the plat of said subdivision and extension, and as the same appears on the official records of the parish clerk of Calcasieu Parish, Louisiana, to-wit: the plat of said subdivision and extension, and as the same appears on the official records of the parish clerk of Calcasieu Parish, Louisiana, to-wit: the plat of said subdivision and extension.

GRAPHIC SCALE

(IN FEET)
1 inch = 30 ft

	7/19/19	UPDATED TENANTS, ZONING, ETC.
10	7/19/19	UPDATED TENANTS, ZONING, ETC.
9	12/29/08	UPDATED COMPANY
8	05/03/08	LIQUOR LINE
7	05/02/07	EXCEPTIONS ADDED/LEGAL



3-18TB Storage Record up to 64 IP Cameras HD Output 2x NIC Cards DW Spectrum IPVMS 5 YEAR Limited Warranty

Summary

The Blackjack[®] Cube™ server can record and manage single-sensor IP cameras of any resolution, with an equivalent capacity of up to 64 2.1MP/1080p cameras at 30fps and a maximum of 360Mbps throughput. The hardware includes DVI-D/DVI-I outputs, Windows[®] 10 OS, and dual network card. The server is ONVIF conformant and is available with 3-18TB HDD and 5 year limited warranty.

Features


- Supports all ONVIF conformant IP cameras
- Record and manage single- and multi-sensor IP cameras of any resolution up to maximum 360Mbps throughput (equivalent to 64 2.1MP/1080p cameras at 30fps)
- Storage options 3-18TB internal storage
- DVI-D or true HD video output
- Dual network ports
- USB interface
- Windows[®] 10 OS
- Hosting DW Spectrum[®] IPVMS for setup, configuration, monitoring and recording
- One-time recording license charge, fully transferable between cameras and encoders
- One (1) DW Spectrum[®] IPVMS 4-channel licenses included (DW-SPECTRUMLSC004)
- No annual maintenance fees
- Simple enterprise scalability
- Auto device discovery
- Dual stream recording
- 5 year limited warranty

Available models

- DW-BJCUBE3T - 3TB storage
- DW-BJCUBE4T - 4TB storage
- DW-BJCUBE6T - 6TB storage
- DW-BJCUBE9T - 9TB storage
- DW-BJCUBE12T - 12TB storage
- DW-BJCUBE18T - 18TB storage

Dimensions

unit: inch (mm)

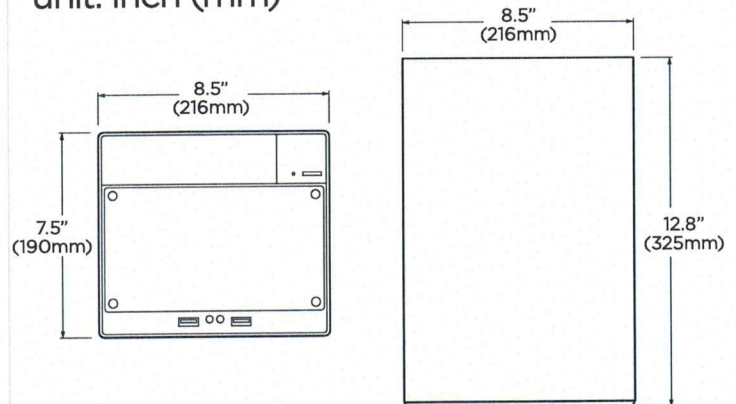

Specifications



MODEL		Blackjack [®] Cube™
Maximum IP cameras		64
Included IP licenses		4
Form factor		Desktop
Operating system		Windows [®] 10
CPU		Intel [®] i5 [®] processor
Memory		16GB
NIC		2x gigabit ethernet (RJ45)
System	Max video storage rate (Mbps)	360 Mbps
Storage	Maximum hard drives	3 x SATA HDD
	Maximum storage	18TB
Video-out	Outputs	DVI-D or true HD output
	Resolution	HD 1080p
Pre-loaded VMS software		DW Spectrum [®] IPVMS
Unlimited remote clients		Cross platform - Windows [®] , Linux [®] and Mac [®]
Mobile apps		iOS [®] and Andriod [®]
DW Spectrum [®] IP video management software		"The Grid" flexible user interface with unlimited layouts
		Seamless transition from live to recorded video
		Unique interactive timeline with built in smart, thumbnail and calender search
Keyboard & mouse		Included
Power		300W**
Operating temperature and humidity		41°F-104°F (5°C-40°C) / 20-90% RH
Dimension (WxDxH) (inches)		8.5" x 12.8" x 7.5" (215.9 x 325.1 x 190.5 mm)
Warranty		5 year limited

* Available at time of initial order only / ** UPS recommended

Designed, Assembled and Tested in the U.S.A.

DS-2CD2343G0-I

4 MP Outdoor IR Network Turret Camera



The Hikvision DS-2CD2343G0-I Outdoor IR Turret Camera provides high definition network output. It supports H.265+ video compression technology, which assures savings in bandwidth and storage.

The camera has an EXIR 2.0 range of up to 100 feet (30 meters).

The 2.8 mm and 4 mm lens options are optimized for viewing angles that fit any situation.

- 1/3" (4 MP) Progressive Scan CMOS
- Up to 2688 x 1520 Resolution
- 2.8 mm and 4 mm Fixed Lens Options
- EXIR 2.0 Range Up to 100 ft (30 m)
- H.265+/H.265/H.264+/H.264
- 120dB True WDR
- IP67 Protection
- Durable Metal Housing
- 12 VDC $\pm$ 25% (PoE 802.3af), maximum 7.5 W

Available models:

DS-2CD2343G0-I:
2.8 mm and 4 mm lenses





Summary

CaaS™ cameras are an all-in-one VIDEO SURVEILLANCE SYSTEM!
No server hardware is required.

MEGApix® CaaS™ series IP cameras combine the cameras with the ease and power of DW Spectrum® IPVMS and on-board storage.

DW Spectrum® IPVMS server is installed and licensed.

Features

- 4MP 1/3" image sensor at real-time 30fps
- 2.8-12mm motorized zoom auto-focus p-iris lens
- DW Spectrum® IPVMS camera as a server
- Easily deploy with pre-loaded video management system (VMS) software on camera for out-of-the-box operation
- Automatic installation and licensing with first power on - Simply mount camera, connect and see your video
- Saves time and money with **no server hardware required**
- Connect up to 30 CaaS™ cameras simultaneously in a single system
- True Wide Dynamic Range (WDR)
- Dual recording option with Blackjack® NAS appliance
- Dual codecs (H.264, MJPEG) with simultaneous dual-stream
- 100' Smart IR™ with intelligent camera sync
- CleanView™ hydrophobic dome coating repels water, dust and grease
- Outdoor vandal dome
- Smart DNR™ 3D digital noise reduction
- True day/night with mechanical IR cut filter
- Programmable privacy zones
- Auto gain control (AGC)
- Auto white balance (AWB)
- Motion detection
- Choice of 64GB, 128GB or 256GB memory for recording
- Web server built-in
- PoE class 3 and DC12V
- Waterproof cabling
- ONVIF conformant, profile S
- IP66 environmental-rated dust-tight and water-resistant
- IK 10-rated impact-resistant
- 5 year warranty



Accessories (Optional)



DWC-VFZWM
Wall mount
bracket




DWC-VFZJUNC
Junction box



DWC-VFZCM
Ceiling mount
bracket

Dimensions

unit: Inch (mm)



Specifications

Designed and engineered in U.S.A and Korea



IMAGE	
Image sensor	4MP 1/3" CMOS
Total pixels	2688(H) x 1520(V)
Minimum scene illumination	0.2 lux (color) 0.0 lux (B/W)
Video output	Local video output CVBS 1.0V p-p (75Ω) 4:3 aspect ratio
Resolution	4MP (2560 x 1440)
LENS	
Focal length	2.8-12mm, F1.4
Lens type	Motorized zoom auto-focus p-iris lens
Field of view (FoV)	87° - 32°
IR distance	100ft range IR
Optical zoom	x4.2 optical zoom
OPERATIONAL	
Shutter mode	Auto, manual, anti-flicker, slow shutter
Shutter speed	1/30-1/32000
Slow shutter	1-1/5, 1/7.5, 1/10
Auto gain control	Auto
Day and night	Auto, day (Color), night (B/W)
Smart DNR™ 3D digital noise reduction	0-11
Wide dynamic range (WDR)	True WDR (WDR) Off, WDR2x, WDR3X
Wide dynamic range (WDR) dB	120dB
Privacy zone	16 programmable privacy masks
Alarm notifications	Notifications via e-mail, FTP server or SD card recording
NETWORK	
LAN	802.3 compliance 10/100 LAN
Video compression type	H.264, MJPEG
Resolution	H.264: 1440p/1080p/720p/VGA/D1/CIF MJPEG: 1280x720/800x600/VGA/768x432/D1/CIF
Frame rate	Up to 30fps at all resolutions
Video bitrate	100Kbps - 10Mbps, multi-rate for preview and recording
Bitrate control	Multi streaming CBR/VBR at H.264 (Controllable frame rate and bandwidth)
Streaming capability	Dual-stream at different rates and resolutions
IP	IPv4
Protocol	Zero config (Auto IP), ONVIF, TCP/IP, UDP, RTP(UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2c/v3(MIB-2)
Security	HTTPS(SSL), IP filtering, 802.1x, digest authentication(ID/PW)
Maximum user access	5 users
ONVIF conformance	Yes
Web viewer	OS: Windows®, Mac® OS, Linux® Browser: Internet Explorer®, Google Chrome®, Mozilla Firefox®, Safari®
Video management software	DW Spectrum® IPVMS
Number of DW Spectrum® IPVMS licenses included	1 DW Spectrum® license
Local server recording	DWC-MV84WiAC6: 64GB local memory for recording DWC-MV84WiAC1: 128GB local memory for recording DWC-MV84WiAC2: 256GB local memory for recording
Max. number of CaaS™ cameras in the same network/system	Up to 30 MEGApix® CaaS™ cameras in the same network/system
ENVIRONMENTAL	
Operating temperature	-4°F - 122°F (-20°C - 50°C)
Operating humidity	10-90% RH (non-condensing)
IP rating	IP66-rated
IK rating	IK10-rated impact-resistant
Other certifications	CE, FCC, RoHS, UL listed
ELECTRICAL	
Power requirement	DC12V, PoE (IEEE 802.3af Class 3). Adaptor not included.
Power consumption	DC12V: Max 7.1W PoE: Max 9.2W
MECHANICAL	
Material	aluminum vandal housing, polycarbonate dome
Dimensions	4.9" x 3.6" (125 x 92 mm)
Weight	1.87 lb (0.85kg)



866.446.3595



sales@dwcc.tv



www.digital-watchdog.com



DS-76xxNI-Q2/xP Series

4K Plug and Play Network Video Recorder with PoE



- H.265+/H.265/H.264/H.264+
- Accepts Third-Party Network Cameras
- Supports 8 or 16 IP Cameras
- Live View, Storage, and Playback up to 8 MP
- Independent HDMI (4K, 3840 × 2160) and VGA
- 2 SATA Interfaces
- 1 Self-Adaptive 10/100/1000 Mbps Network Interface
- 8 or 16 Independent PoE Network Interfaces
- Long Distance (100 to 300 m) Network Transmission via PoE
- Hik-Connect for Easy Network Management

Hikvision's DS-76xxNI-Q2/xP Series of NVRs provides centralized management of Hikvision as well as third-party network IP cameras. The NVRs also support Hikvision smart IP cameras, for added functionality.

Smart search for selected areas in the video, and smart playback, increase search efficiency.

Available Models:

DS-7608NI-Q2/8P: 8 PoE channels

DS-7616NI-Q2/16P: 16 PoE channels