

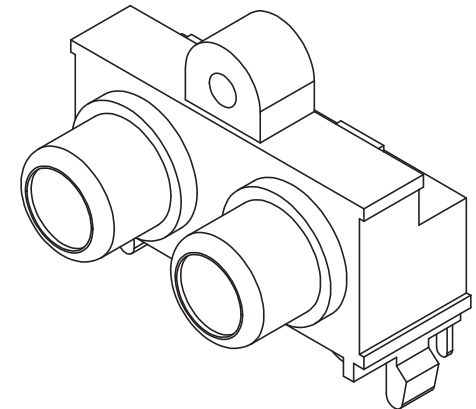


REV.	DESCRIPTION	DATE
A	NEW DRAWING	6/13/2007

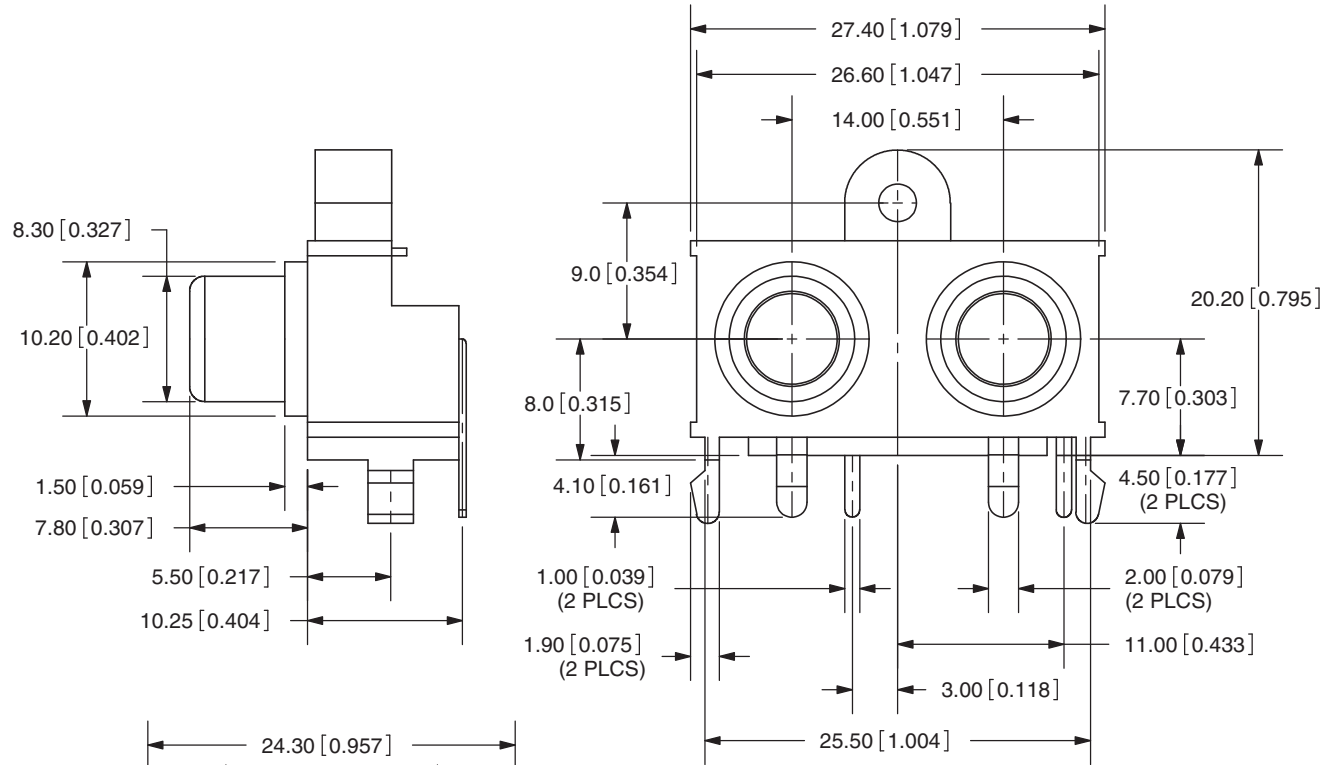

TOLERANCE:  
±0.3mm UNLESS OTHERWISE  
SPECIFIED

**SPECIFICATIONS:**  
RATING: 24V DC @ 5A  
CONTACT RESISTANCE: 30m OHMS MAX  
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC  
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE  
LIFE: 5,000 CYCLES  
OPERATING TEMP: -20° ~ +85°C

#### COLOR INDEX

PART NO.	INPUT X1	INPUT X2
RCJ-2121	Red Color	Black Color
RCJ-21X1 X2	Color X1	Color X2

#### PCB LAYOUT TOP VIEW

MODEL NO.	RCJ-21XX
SCHEMATIC	

#### COLOR CHART

1	Black
2	Red
3	White
4	Yellow
5	Blue
6	Green

	MATERIAL	PLATING
BARREL (1)	Bronze	Nickel
TERMINAL (2)	Bronze	Tin
TERMINAL (3)	Bronze	Tin
BASE	ABS	Black Color
COVER	ABS	Black Color
INPUT X2	PBT	see color index
INPUT X1	PBT	see color index



**CUI INC**

20050 SW 112th Ave.  
Tualatin, OR 97062  
Phone: 503-612-2300  
800-275-4899  
Fax: 503-612-2383  
Website: www.cui.com

TITLE: RCA Jack, Dual, Rt Angle, PCB Mount, Vert.	REV: A
PART NO. RCJ-21XX	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 2:1

PC FILE NAME:  
RCJ-21XX

COPYRIGHT 2007 BY CUI INC.