Surface Mount

Voltage Controlled Oscillator

MOS-464+

5V Tuning for PLL IC's 420 to 464 MHz

CASE STYLE: CZ682
PRICE: $ 20.45 ea. QTY (5-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Features

- low phase noise
- low pulling
- low current consumption
- aqueous washable

Applications

- wireless communication
- defense communication & radar
- satellites
- PMR / PAMR

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz Typ.				TUNING VOLTAGE RANGE (V)		SENSI-TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)	NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dBr (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
																		Vcc (volts)	Current (mA)
	Min.	Max.	Typ.	1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Typ.		Max.
MOS-464+	420	464	-5	-82	-108	-129	-149	0.25	4	20-30	370	8	-90	-19	-12	0.3	2	4	14

Pin Connections

RF OUT	5
VCC	3
V-TUNE	1
GROUND	2,4,6,7,8

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	6V
Absolute Max. Tuning Voltage (Vtune)	6V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

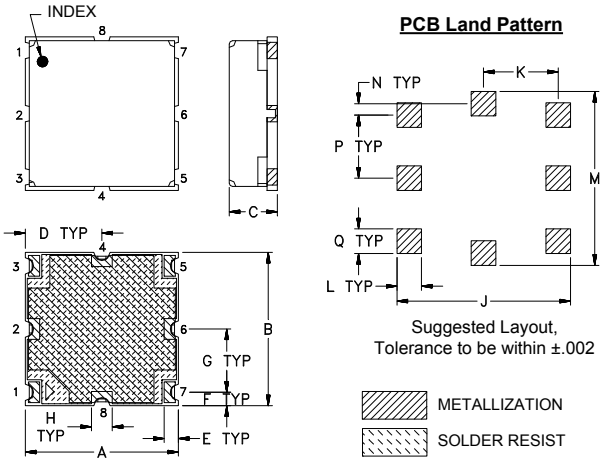

Demo Board MCL P/N: TB-128
Suggested PCB Layout (PL-023)

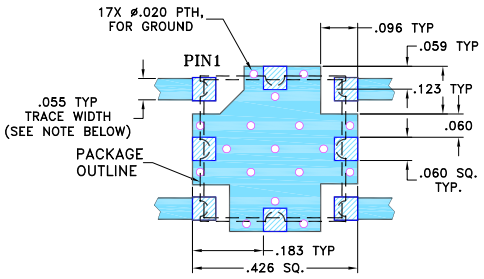

NOTE: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	wt.
.375	.375	.131	.188	.035	.033	.154	.050	.425	.183	.060	.425	.028	.154	.060	grams
9.52	9.52	3.33	4.77	0.89	0.84	3.91	1.27	10.80	4.65	1.52	10.80	0.71	3.91	1.52	.60

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. **2.** Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. **3.** The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Performance Data & Curves*

MOS-464+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 442 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	53.87	388.0	382.1	376.8	-4.52	-4.39	-5.34	8.34	-17.4	-63.8	-51.4	3.75	0.30	-79.2	-105.0	-125.8	-145.5	1.0	-83.61
0.25	44.51	401.0	395.5	390.7	-4.55	-4.27	-4.72	8.36	-18.4	-59.7	-46.8	3.58	0.41	-79.9	-106.5	-127.4	-147.3	2.0	-91.37
0.50	38.23	411.8	406.7	402.1	-4.64	-4.31	-4.58	8.37	-18.9	-57.1	-45.2	2.80	0.33	-81.4	-107.6	-128.3	-147.9	3.5	-98.13
0.75	34.06	421.2	416.2	411.8	-4.74	-4.40	-4.55	8.38	-20.7	-55.1	-44.0	2.38	0.41	-82.4	-108.2	-128.9	-148.4	6.0	-103.79
1.00	31.03	429.5	424.7	420.5	-4.84	-4.50	-4.58	8.38	-20.6	-53.1	-43.2	2.12	0.26	-82.5	-108.5	-129.1	-149.2	8.5	-107.03
1.25	28.70	437.1	432.5	428.3	-4.94	-4.59	-4.63	8.39	-21.1	-51.2	-42.8	1.94	0.27	-83.3	-108.6	-129.2	-149.6	10.0	-108.59
1.50	26.82	444.2	439.7	435.6	-5.02	-4.68	-4.69	8.40	-22.7	-49.8	-42.0	1.83	0.38	-83.9	-108.5	-129.2	-148.7	35.5	-120.33
1.75	25.22	450.8	446.4	442.3	-5.09	-4.76	-4.75	8.40	-23.0	-48.1	-41.2	1.74	0.33	-83.7	-108.5	-129.3	-148.4	60.7	-124.59
2.00	23.82	457.0	452.7	448.7	-5.15	-4.83	-4.81	8.41	-23.4	-47.1	-41.1	1.67	0.25	-84.1	-108.4	-129.1	-148.6	86.7	-128.13
2.25	22.58	462.9	458.6	454.7	-5.21	-4.90	-4.87	8.41	-24.4	-46.1	-40.8	1.62	0.27	-84.0	-108.4	-129.1	-148.4	100.0	-129.23
2.50	21.42	468.5	464.3	460.3	-5.26	-4.96	-4.92	8.42	-25.0	-44.7	-40.6	1.58	0.36	-83.9	-108.4	-129.0	-148.2	177.0	-134.33
2.75	20.32	473.8	469.6	465.7	-5.31	-5.02	-4.98	8.43	-25.7	-43.9	-40.2	1.54	0.35	-84.1	-108.3	-129.0	-148.1	211.6	-135.82
3.00	19.24	478.8	474.7	470.8	-5.36	-5.08	-5.03	8.43	-26.8	-43.0	-40.2	1.50	0.25	-83.6	-108.0	-128.8	-148.5	302.4	-138.94
3.25	18.17	483.6	479.5	475.7	-5.41	-5.14	-5.08	8.44	-27.6	-42.9	-39.9	1.46	0.23	-83.8	-108.1	-128.8	-148.3	361.5	-140.44
3.50	17.13	488.1	484.1	480.2	-5.47	-5.20	-5.14	8.45	-27.8	-41.9	-40.0	1.41	0.27	-83.8	-108.0	-128.5	-147.9	606.7	-145.07
3.75	16.09	492.4	488.3	484.5	-5.54	-5.27	-5.20	8.45	-28.0	-41.1	-40.1	1.35	0.36	-83.7	-107.6	-128.4	-147.8	851.6	-147.86
4.00	15.06	496.4	492.4	488.6	-5.60	-5.34	-5.27	8.46	-28.8	-41.3	-40.0	1.29	0.39	-84.0	-107.5	-128.3	-147.4	1000.0	-148.65

*at 25°C unless mentioned otherwise

MOS-464+
Frequency and Tuning Sensitivity

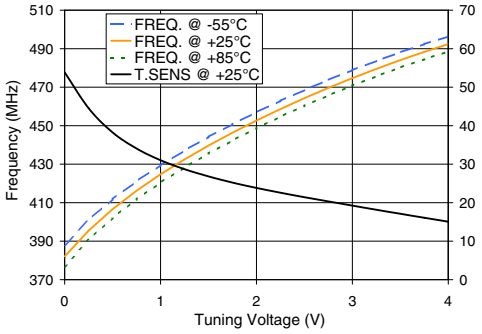

MOS-464+
Power Output

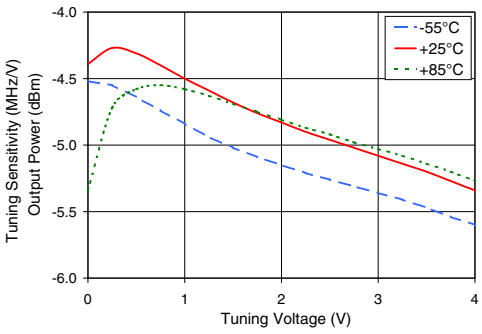

MOS-464+
Harmonics Level

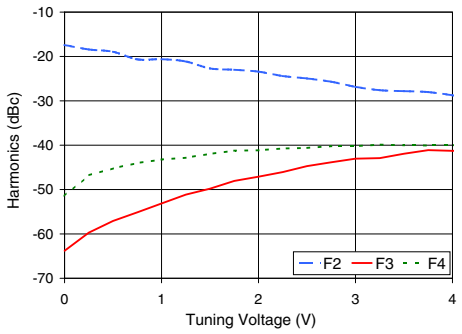

MOS-464+
Frequency Pulling & Pushing (Vcc ± 5%)

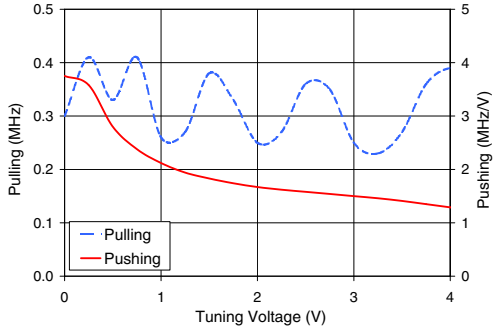

MOS-464+
Phase Noise Vs. Tuning Voltage

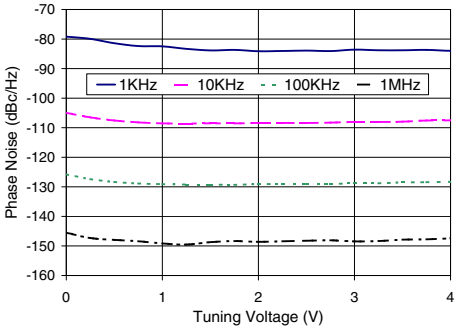

MOS-464+
Phase Noise

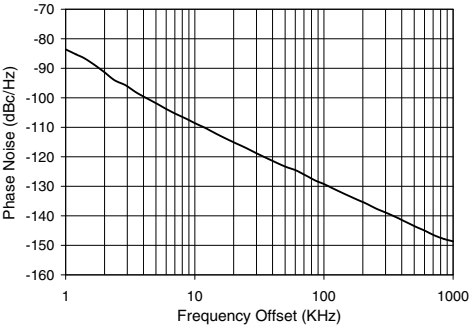

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. **2.** Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. **3.** The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.