Surface Mount

Frequency Mixer

TUF-1LHSM+

Level 10 (LO Power +10 dBm) 2 to 600 MHz

CASE STYLE: NNN150
PRICE: $9.50 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	4
RF	1
IF	2
GROUND	3
CASE GROUND	3

Features

- low conversion loss, 6.0 dB typ.
- high L-R & L-I isolation, 50 dB typ.
- rugged welded construction

Applications

- VHF/UHF
- defense & federal communications

Outline Drawing

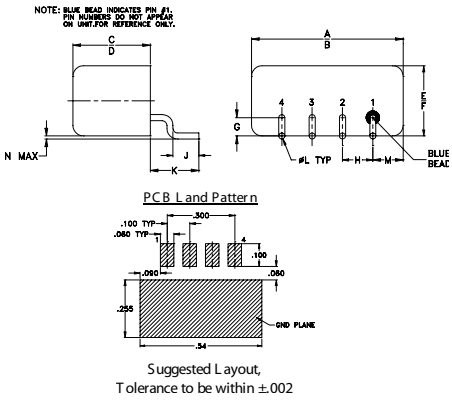

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.50	.48	.255	.240	.23	.21	.06
12.70	12.19	6.48	6.10	5.84	5.33	1.52

H	J	K	L	M	N	wt
.100	.09	.16	.020	.09	.005	grams
2.54	2.29	4.06	0.51	2.29	0.13	1.9

Demo Board MCL PIN: TB-201
Suggested PCB Layout (PL-081)

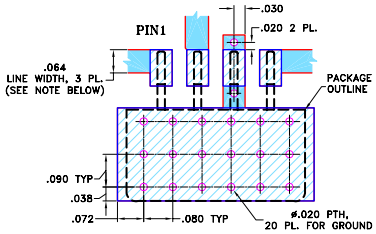

NOTES: 1.TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2.BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 @ CENTER BAND (dBm)
		Mid-Band m			Total Range	L		M		U		L		M		U		
LO/RF f_L-f_U	IF	$\overline{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
2-600	DC-600	6.0	0.17	7.0	8.0	70	50	50	30	42	25	65	45	50	30	41	22	17

1 dB COMP.: +5 dBm typ.

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]
m= mid band [2f_L to f_U/2]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
2.00	32.00	6.28	67.01	84.01	1.47	2.80
4.00	34.00	5.95	65.93	80.03	1.27	2.68
5.00	35.00	5.89	65.47	78.57	1.23	2.65
10.00	40.00	5.80	63.93	73.13	1.14	2.48
20.00	50.00	5.82	61.72	68.22	1.12	2.53
50.00	80.00	5.82	56.12	60.69	1.11	2.47
59.87	89.87	5.78	54.83	59.50	1.11	2.35
100.00	70.00	5.77	51.13	55.91	1.12	2.37
117.74	87.74	5.79	50.12	55.10	1.15	2.32
175.61	145.61	5.69	47.32	52.30	1.18	2.26
200.00	170.00	5.73	46.57	51.26	1.21	2.33
233.48	203.48	5.70	45.24	49.36	1.25	2.27
291.36	261.36	5.69	43.94	46.68	1.27	2.24
300.00	270.00	5.68	43.65	46.00	1.31	2.29
349.23	319.23	5.71	42.63	43.46	1.35	2.28
407.10	337.10	5.70	41.85	41.86	1.40	2.28
464.97	434.97	5.72	40.61	39.52	1.45	2.29
522.84	492.84	5.77	39.23	37.60	1.49	2.33
580.71	550.71	5.84	38.82	36.92	1.51	2.33
600.00	570.00	5.87	38.87	36.44	1.53	2.31

Electrical Schematic

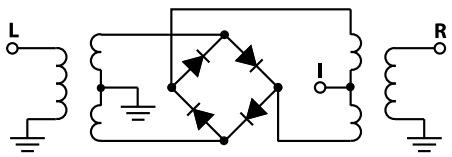

TUF-1LHSM
CONVERSION LOSS
at IF Freq of 30 MHz

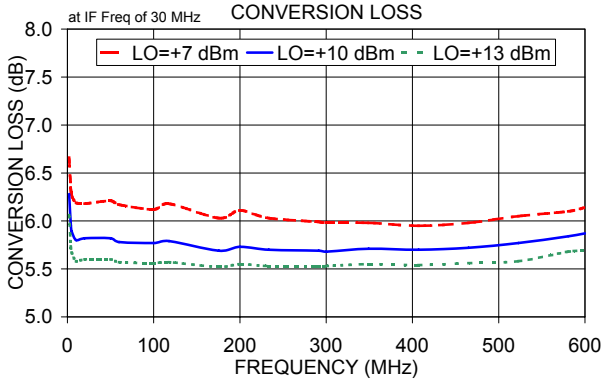

TUF-1LHSM
L-R ISOLATION

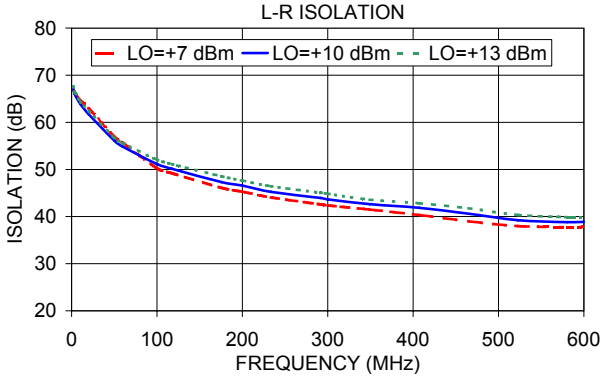

TUF-1LHSM
L-I ISOLATION

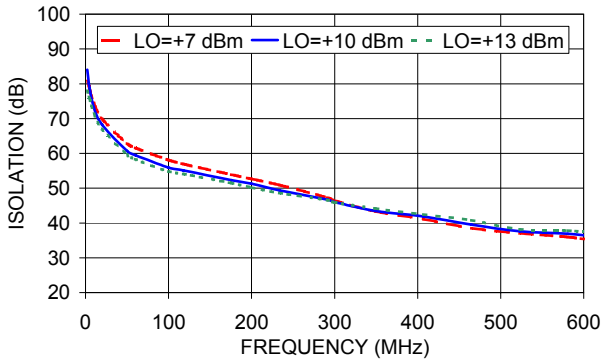

TUF-1LHSM
RF VSWR

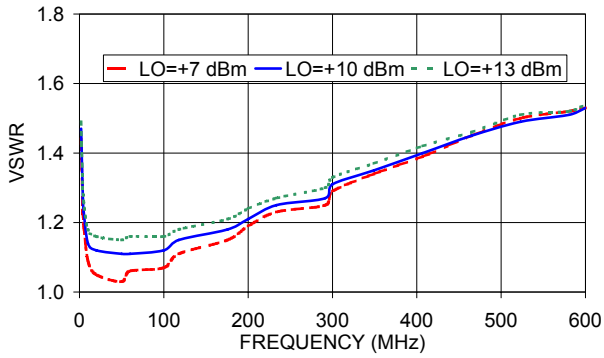

TUF-1LHSM
LO VSWR

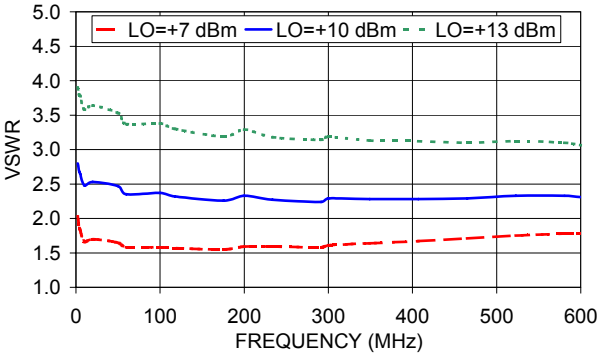

TUF-1LHSM
IF VSWR