



طيران الخليج
GULF AIR

ATS FLIGHT PLAN

Date: SEP 2020

Prepared by: Wael Mohamed, MFD

INTRODUCTION

ATS Flight Plan

An ATS flight plan shall be submitted for every flight in order to permit alerting services to be activated if required.

The ATS flight plan for an individual flight shall be submitted on an appropriate form designated by the state concerned and being generally identical or similar to the ICAO Model Flight Plan Information submitted in the individual ATS flight plan shall be based on the OFP for the respective flight.

INTRODUCTION

Responsibility for Daily Filing of ATS Plan:

Flight Dispatch is responsible for filing ATS flight plans for all flights.

Flight Dispatch should cross check filing of ATS flight plan either by FPM telex box 'EC' transmitted or via SITA application.

High delay (more than 24HR) a suffix 'D' should be used or as indicated in MM.

ICAO FLIGHT PLAN

The Flight plan shall include all information relevant to that specific planned flight. This includes:

Item 7- Aircraft identification (Note: Aircraft identification means the radio call sign!)

Item 8 -Flight rules and type of flight

Item 9 – Number of aircraft, type(s) of aircraft and wake turbulence category

Item 10- Equipment on board

Item 13 - Departure aerodrome ICAO code and planned time of departure

Item 15 – First cruising speed and first cruising level or altitude Route to be followed

Item 16 - Destination aerodrome ICAO code and total estimated elapsed time (EET)

Item 17 - Alternate aerodrome(s)

Item 18 – Remarks and other equipment (emergency and survival)

Item 19 - Fuel endurance and total number of persons on board

ICAO FLIGHT PLAN

(FPL-GFA071-IS
 -A321/M-SDE1E2E3FGHIJ4J5M1P2RWYZ/D1LB1
 -OBBI0140
 -N0456F380 BHR B457 NARMI UN697 KITOT L550 NWB N697 MENLI
 L677 CVO DCT
 -HECA0236 HESH HEGN
 -PBN/A1B1C1D1O1S2 DAT/SV DOF/200916 REG/A9CCA
 EET/OEJD0006
 HECC0201 SEL/BFKR RVR/150 RMK/GCAPGFA1221 SUR/RSP180
 COM/TCAS)

U.S. Department of Transportation Federal Aviation Administration				International Flight Plan			
PRIORITY <=FF		ADDRESSEE(S)					
FILING TIME		ORIGINATOR				<=	
SPECIFIC IDENTIFICATION OF ADDRESSEE(S) AND/OR ORIGINATOR							
3 MESSAGE TYPE <=FPL		7 AIRCRAFT IDENTIFICATION		8 FLIGHT RULES		TYPE OF FLIGHT	
9 NUMBER		TYPE OF AIRCRAFT		WAKE TURBULENCE CAT.		10 EQUIPMENT	
13 DEPARTURE AERODROME		TIME		<=			
15 CRUISING SPEED		LEVEL		ROUTE			
16 DESTINATION AERODROME		TOTAL EET HR MIN		ALTN AERODROME		2ND ALTN AERODROME	
18 OTHER INFORMATION						<=	
SUPPLEMENTARY INFORMATION (NOT TO BE TRANSMITTED IN FPL MESSAGES)							
19 ENDURANCE HR MIN		PERSONS ON BOARD		EMERGENCY RADIO		UHF VHF ELBA	
SURVIVAL EQUIPMENT		JACKETS		LIGHT FLUORES		UHF VHF	
POLAR DESERT MARITIME JUNGLE		DINGHIES		NUMBER CAPACITY COVER		COLOR	
D /		A /		REMARKS		<=	
C /		PILOT-IN-COMMAND		FILED BY		ACCEPTED BY	
						ADDITIONAL INFORMATION	

ICAO FLIGHT PLAN

ITEM 7 - AIRCRAFT IDENTIFICATION

FLIGHT RULES

(FPL-GFA071-**I**S)

- a) the three-letter ICAO designator for the aircraft operating followed by the flight identification (e.g. GFA071)
- b) FLIGHT RULES Insert one of the following letters to denote the category of flight rules with which the pilot intends to comply:
 - I - IFR flight which GULF AIR always operating
 - V - VFR flight
 - Y - The first part of the flight is IFR, followed by a VFR section, after which several IFR/VFR sections may follow.
 - Z - The first part of the flight is VFR, followed by a IFR section, after which several VFR/IFR sections may follow

ICAO FLIGHT PLAN

ITEM 7 - AIRCRAFT IDENTIFICATION

(FPL-GFA071-IS

TYPE OF FLIGHT

Insert one of the following letters to denote the type of flight:

S - scheduled flight

N - non-scheduled air transport operation (e.g. charter, freight or taxi flight)

G - general aviation (other than a commercial flight or flight related to aerial work; for example not a commercial training flight)

M - military aviation, customs, police.

X - a flight not belonging to any of the defined categories above. (A clarification of flight type shall be entered in Item 18 RMK/; see the examples).

ICAO FLIGHT PLAN

ITEM 9 - NUMBER AND TYPE OF AIRCRAFT AND WAKE TURBULENCE
CATEGORY

-**A321**/M-SDE1E2E3FGHIJ4J5M1P2RWYZ/D1LB1

TYPE OF AIRCRAFT A321 Or any other GF fleet aircraft

ICAO FLIGHT PLAN

ITEM 9 - NUMBER AND TYPE OF AIRCRAFT AND WAKE TURBULENCE CATEGORY

-A321/**M**-SDE1E2E3FGHIJ4J5M1P2RWYZ/D1LB1

WAKE TURBULENCE CATEGORY

J - SUPER, to indicate an aircraft type with a maximum certificated take-off mass of 560 000 kg or more.

H - HEAVY, to indicate an aircraft type with a maximum certificated take-off mass of less than 560 000 kg but more than 136 000 kg.

M - MEDIUM, to indicate an aircraft type with a maximum certificated take-off mass of less than 136 000 kg but more than 7 000 kg.

L - LIGHT, to indicate an aircraft type with a maximum certificated take-off mass of 7 000 kg or less.

ICAO FLIGHT PLAN

ITEM 10 - EQUIPMENT AND CAPABILITIES

-A321/M-**SDE1E2E3FGHIJ4J5M1P2RWYZ/D1LB1**

Capabilities consists of three elements:

- a) presence of relevant serviceable equipment on board the aircraft,
- b) equipment and capabilities commensurate with crew qualifications; and,
- c) where applicable, authorization from the appropriate authority.

Radio communication, navigation and approach aid equipment

Insert one letter as follows:

N - if no COM/NAV/approach aid equipment for the route to be flown is carried, or the equipment is unserviceable, or

S - if standard COM/NAV/approach aid equipment for the route to be flown is carried and serviceable. In Item 10, S shall be inserted first, followed by the rest of the equipment in alphabetical order (see Note 1).

ICAO FLIGHT PLAN

ITEM 10 - EQUIPMENT AND CAPABILITIES

-A321/M-**SDE1E2E3FGHIJ4J5M1P2RWYZ/D1LB1**

Radio communication, navigation and approach aid equipment

and/or

insert one or more of the following letters to indicate the COM/NAV/approach aid equipment and capabilities available on the next table:

ICAO FLIGHT PLAN

ITEM 10 - EQUIPMENT AND CAPABILITIES

Note 1. If the letter S is used, standard equipment is considered to be VHF RTF, VOR and ILS, unless another combination is prescribed by the appropriate ATS authority.

Note 2. If the letter G is used, the types of external GNSS augmentation, if any, are specified in Item 18 following the indicator NAV/ and separated by a space.

-A321/M-**SDE1E2E3FGHIJ4J5M1P2RWYZ/D1LB1**

A	GBAS landing system	J5	CPDLC FANS 1/A SATCOM (INMARSAT)
B	LPV (APV with SBAS)	J6	CPDLC FANS 1/A SATCOM (MTSAT)
C	LORAN C	J7	CPDLC FANS 1/A SATCOM (Iridium)
D	DME	K	MLS
E1	FMC WPR ACARS	L	ILS
E2	D-FIS ACARS	M1	ATC RTF SATCOM (INMARSAT)
E3	PDC ACARS	M2	ATC RTF (MTSAT)
F	ADF	M3	ATC RTF (Iridium)
G	GNSS- If any portion of the flight is planned to be conducted under IFR, it refers to GNSS receivers that comply with the requirements of Annex 10, Volume I (Note 2)	O	VOR
		P1-P9	Reserved for RCP
		R	PBN approved ^{Note 4}
		T	TACAN
		U	UHF RTF
H	HF RTF	V	VHF RTF
I	Inertial Navigation	W	RVSM approved
J1	CPDLC ATN VDL MODE 2 ^{Note 3}	X	MNPS approved
J2	CPDLC FANS 1/A HF DL	Y	VHF with 8.33 kHz channel spacing capability
J3	CPDLC FANS 1/A VDL Mode A	Z	Other equipment carried or other capabilities ^{Note 5}

ICAO FLIGHT PLAN

ITEM 10 - EQUIPMENT AND CAPABILITIES

-A321/M-**SDE1E2E3FGHIJ4J5M1P2RWYZ/D1LB1**

Note 4. If the letter R is used, the performance based navigation levels that can be met shall be specified in Item 18 following the indicator PBN/.

Note 5. If the letter Z is used, specify in Item 18 the other equipment carried or other capabilities, preceded by COM/, NAV/ and/or DAT, as appropriate.

Exemptions for RNAV, CPDLC and 8.33 kHz are to be indicated by inserting the letter Z in Item 10a and then inserting the appropriate descriptors in the following indicators in Item 18:

- a) insert EXM833 following COM/;
- b) insert RNAVX or RNAVINOP as appropriate following NAV/; and/or
- c) insert CPDLCX following DAT/.

Note 6. Information on navigation capability is provided to ATC for clearance and routing purposes.

ICAO FLIGHT PLAN

ITEM 10 - EQUIPMENT AND CAPABILITIES

-A321/M-**SDE1E2E3FGHIJ4J5M1P2RWYZ/D1LB1**

Surveillance equipment and capabilities

INSERT N if no surveillance equipment for the route to be flown is carried, or the equipment is unserviceable,

OR INSERT one or more of the following descriptors, to a maximum of 20 characters, to describe the serviceable surveillance equipment and/or capabilities on board: SSR Modes A and C

A - Transponder - mode A (4 digits - 4,096 codes)

C - Transponder - mode A (4 digits - 4,096 codes) and mode C

SSR Mode S

E - Transponder — Mode S, including aircraft identification, pressure-altitude and extended squitter (ADS-B) capability

H - Transponder — Mode S, including aircraft identification, pressure-altitude and enhanced surveillance capability

I - Transponder — Mode S, including aircraft identification, but no pressure-altitude capability

L - Transponder — Mode S, including aircraft identification, pressure-altitude, extended squitter (ADS-B) and enhanced surveillance capability

ICAO FLIGHT PLAN

ITEM 10 - EQUIPMENT AND CAPABILITIES

-A321/M-**SDE1E2E3FGHIJ4J5M1P2RWYZ/D1LB1**

Surveillance equipment and capabilities

P - Transponder — mode S, including pressure-altitude transmission but no aircraft identification capability

S - Transponder — mode S, including both pressure-altitude and aircraft identification capability

X - Transponder — Mode S with neither aircraft identification nor pressure-altitude capability

Note.— Enhanced surveillance capability is the ability of the aircraft to down-link aircraft derived data via a Mode S transponder.

ADS-B types or ADS-C types

ICAO FLIGHT PLAN


ITEM 13 – DEPARTURE AERODROME AND TIME

-OBBI0140

ITEM 15 - ROUTE

-N0456F380 BHR B457 NARMI UN697 KITOT L550 NWB N697 MENLI L677
CVO DCT

Route

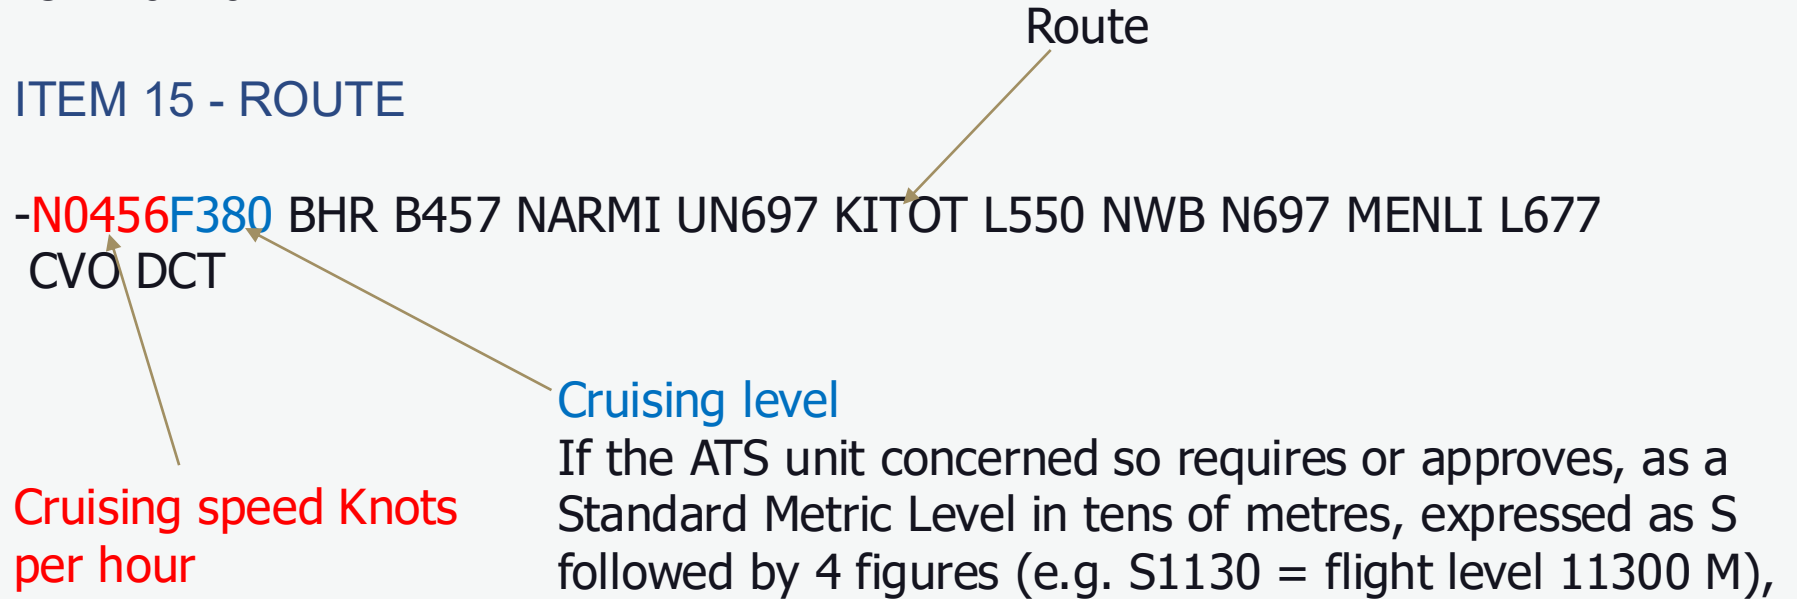

Cruising level

If the ATS unit concerned so requires or approves, as a Standard Metric Level in tens of metres, expressed as S followed by 4 figures (e.g. S1130 = flight level 11300 M),


Cruising speed Knots
per hour

ICAO FLIGHT PLAN

ITEM 16 - DESTINATION AERODROME AND TEET, ALTERNATE AERODROMES

-HECA0236 HESH HEGN

Alternate aerodromes



Destination aerodrome and total estimated elapsed time

Total Estimated Elapsed Time

IFR flights: the estimated time required from take-off to arrive over that designated point, defined by reference to navigation aids, from which it is intended that an instrument approach procedure will be commenced, or, if no navigation aid is associated with the destination aerodrome, to arrive over the destination aerodrome.

ICAO FLIGHT PLAN

ITEM 18 - OTHER INFORMATION

-PBN/A1B1C1D1O1S2 DAT/SV DOF/200916 REG/A9CCA EET/OEJD0006

PBN/ Indication of RNAV and/or RNP capabilities. Include as many of the descriptors below, as apply to the flight, up to a maximum of 8 entries, i.e. a total of not more than 16 characters.

RNP specifications	
L1	RNP 4
O1	Basic RNP 1 all permitted sensors
O2	Basic RNP 1 GNSS
O3	Basic RNP 1 DME/DME
O4	Basic RNP 1 DME/DME/IRU
S1	RNP APCH
S2	RNP APCH with BARO-VNAV
T1	RNP AR APCH with RF (special authorization required)
T2	RNP AR APCH without RF (special authorization required)

RNAV specifications	
A1	RNAV 10 (RNP 10)
B1	RNAV 5 all permitted sensors
B2	RNAV 5 GNSS
B3	RNAV 5 DME/DME
B4	RNAV 5 VOR/DME
B5	RNAV 5 INS or IRS
B6	RNAV 5 LORANC
C1	RNAV 2 all permitted sensors
C2	RNAV 2 GNSS
C3	RNAV 2 DME/DME
C4	RNAV 2 DME/DME/IRU
D1	RNAV 1 all permitted sensors
D2	RNAV 1 GNSS
D3	RNAV 1 DME/DME
D4	RNAV 1 DME/DME/IRU

ICAO FLIGHT PLAN

ITEM 18 - OTHER INFORMATION

-PBN/A1B1C1D1O1S2 **DAT**/SV **DOF**/200916 **REG**/A9CCA **EET**/OEJD0006 HECC0201
SEL/BFKR RVR/150 **RMK**/GCAPGFA1221 **SUR**/RSP180 **COM**/TCAS)

COM/ Indicate communications applications or capabilities not specified in Item 10 a). Refer to note.

DAT/ Indicate data applications or capabilities not specified in 10 a. refer to note

NOTE: If the letter Z is used in Radio communication, navigation and approach aid equipment, specify in Item 18 the other equipment carried or other capabilities.

DOF/ date of flight.

REG/ aircraft registration.

EET/ Significant points or FIR boundary designators and accumulated estimated elapsed times from take-off to such points or FIR boundaries, when so prescribed on the basis of regional air navigation agreements, or by the appropriate ATS authority.

ICAO FLIGHT PLAN

ITEM 18 - OTHER INFORMATION

**-PBN/A1B1C1D1O1S2 DAT/SV DOF/200916 REG/A9CCA EET/OEJD0006 HECC0201
SEL/BFKR RVR/150 RMK/GCAPGFA1221 SUR/RSP180 COM/TCAS)**

SEL/ SELCAL Code.

RMK/ Any other plain language remarks when required by the appropriate ATS authority or deemed necessary.

SUR/ Include surveillance applications or capabilities not specified in Item 10 b).

Thank you.

