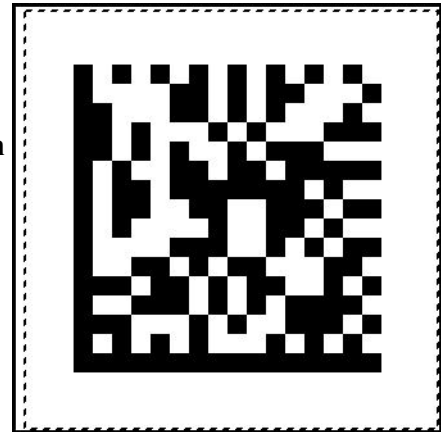


**Roche Diagnostics International Ltd.
LVS-95xx Verification Report****Overall: 4.0/25/660****Reference: #001_Figure_1_Restore_EU_Factory_Configuration**_____
Operator signature_____
Second signature**Results are not valid - uncalibrated image**

2D	
Symbology	Data Matrix
Decoded text	SP.Ac,P
Cell size	1.270mm
Decode	PASS
Contrast	4.0 96%
Modulation	4.0
Reflectance margin	4.0
Axial nonuniformity	4.0 0%
Grid nonuniformity	4.0 0%
Unused EC	4.0 100%
Fixed pattern damage	4.0
L1 (left of L finder)	4.0
L2 (bottom of L finder)	4.0
QZL1 (left quiet zone)	4.0
QZL2 (bottom quiet zone)	4.0
CTR (clock track regularity)	4.0
CTD (clock track damage)	4.0
SFP (solid fixed pattern)	4.0
OCTASA (overall clock track and solid area)	4.0
AG (average grade)	4.0
TR (transition ratio)	4.0 0.00
Cell height	1.270mm
Cell width	1.270mm
Symbol Rotation	0 degrees
Sensor Angle	0 degrees
Light Direction	Red Dome
X print growth	49%
Y print growth	49%
Total CW	24
Data CW	12
Corrections	0
Size	16x16
Rmin	4.3%
Rmax	100%
Contrast uniformity	100%
Structure	PASS

Other information	
Letter Grade	A
ReportID	19951
Operator	ABI (Armin Birrer)
Application standard	ISO/IEC 15415/15416
Limit Action	Don't generate warning if Xdim or symbol height is outside limits
Effective aperture	Reference number 25 (0.635 mm)
Lighting	660
Date and time	10-Mar-2025 15:16 local; 10-Mar-2025 14:16 GMT
Time zone	GMT +1
Sector size	27.3mm by 27.7mm
Last calibration	n/a for imported image
Field of view	27.9mm (camera is 330x330 pixels)
Serial numbers	Unit: 1725845, Camera: 0, Mode 1: 0
Software product and version	LVS-95xx Version 4.4.3.4102
LVS-95xx manufactured by:	Omron Microscan Systems, Inc. 700 SW 39th Street, Ste. 100 Renton, WA 98057 USA http://www.microscan.com

2D Structure		
Embedded data	Description	Value
<234>	Reader programming	feature not supported
SP.Ac,P		
<CR>		