





IPv6 rules

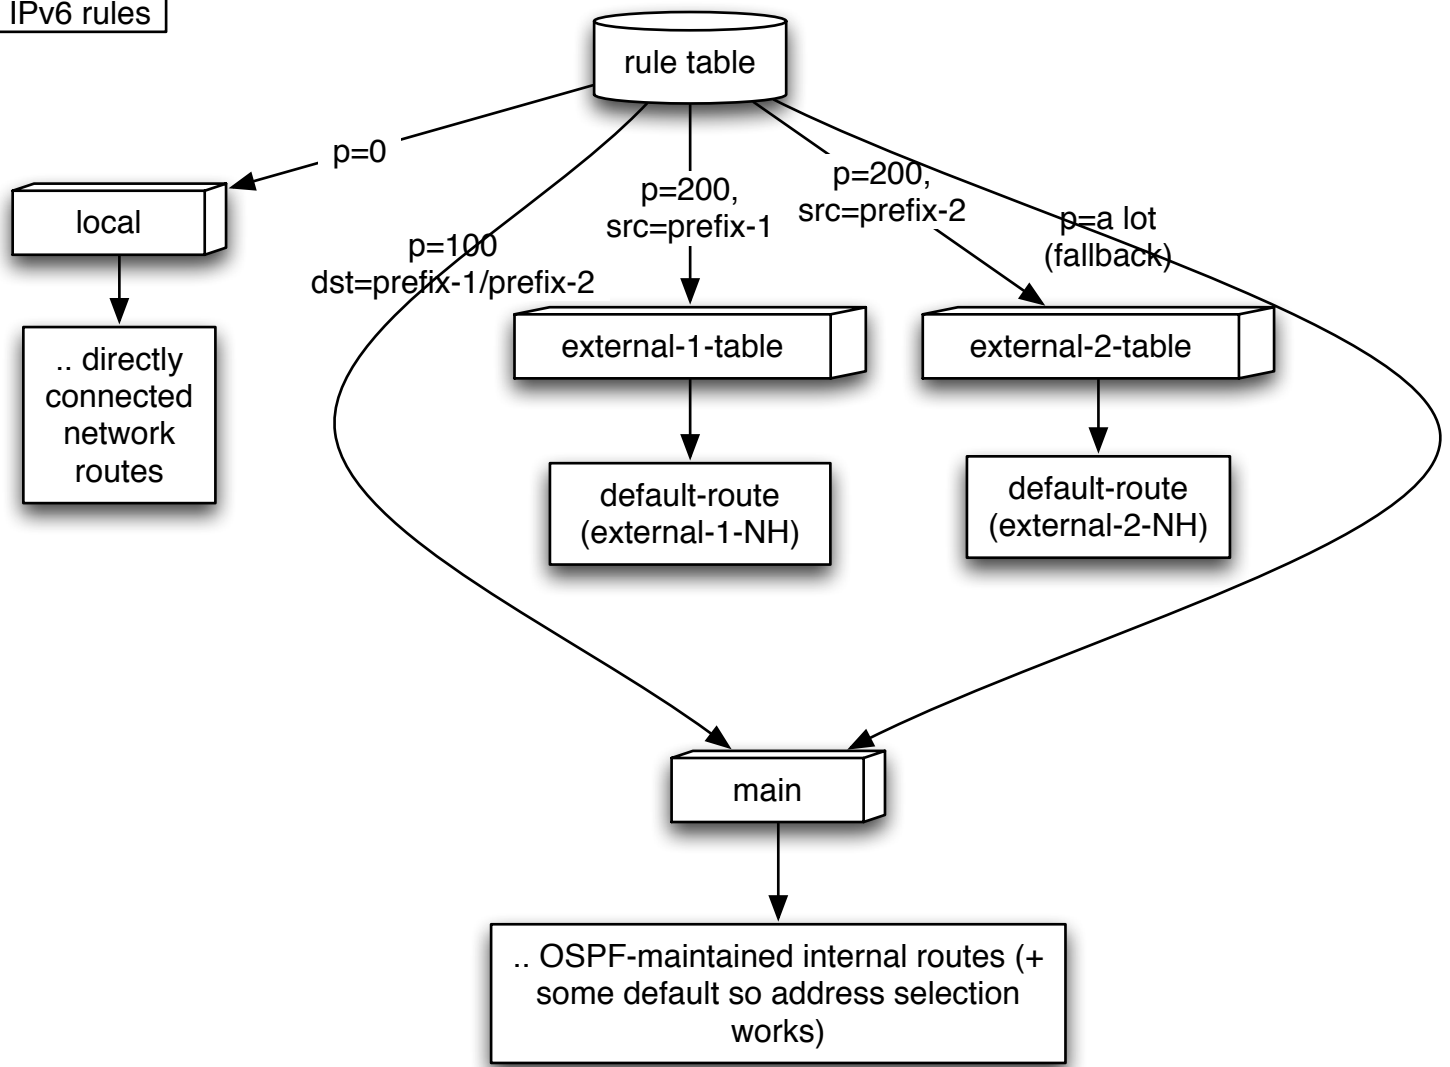


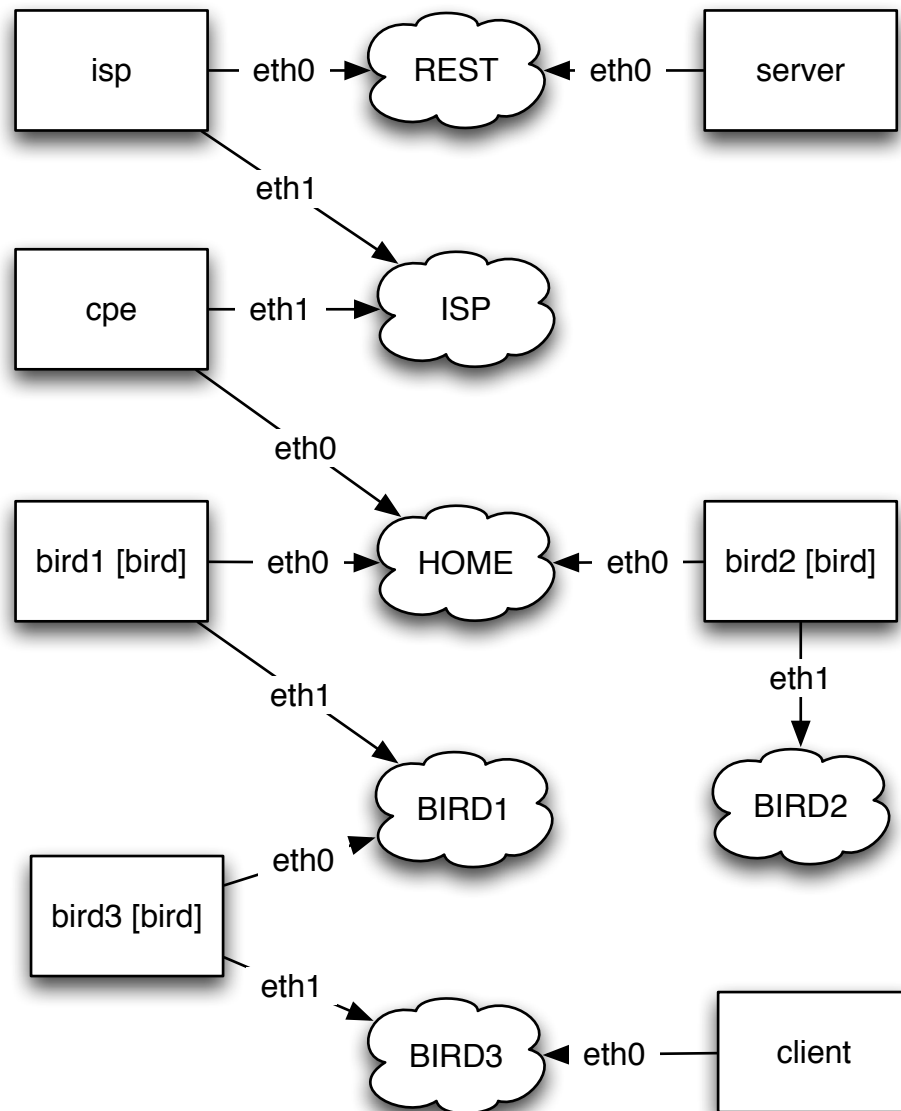


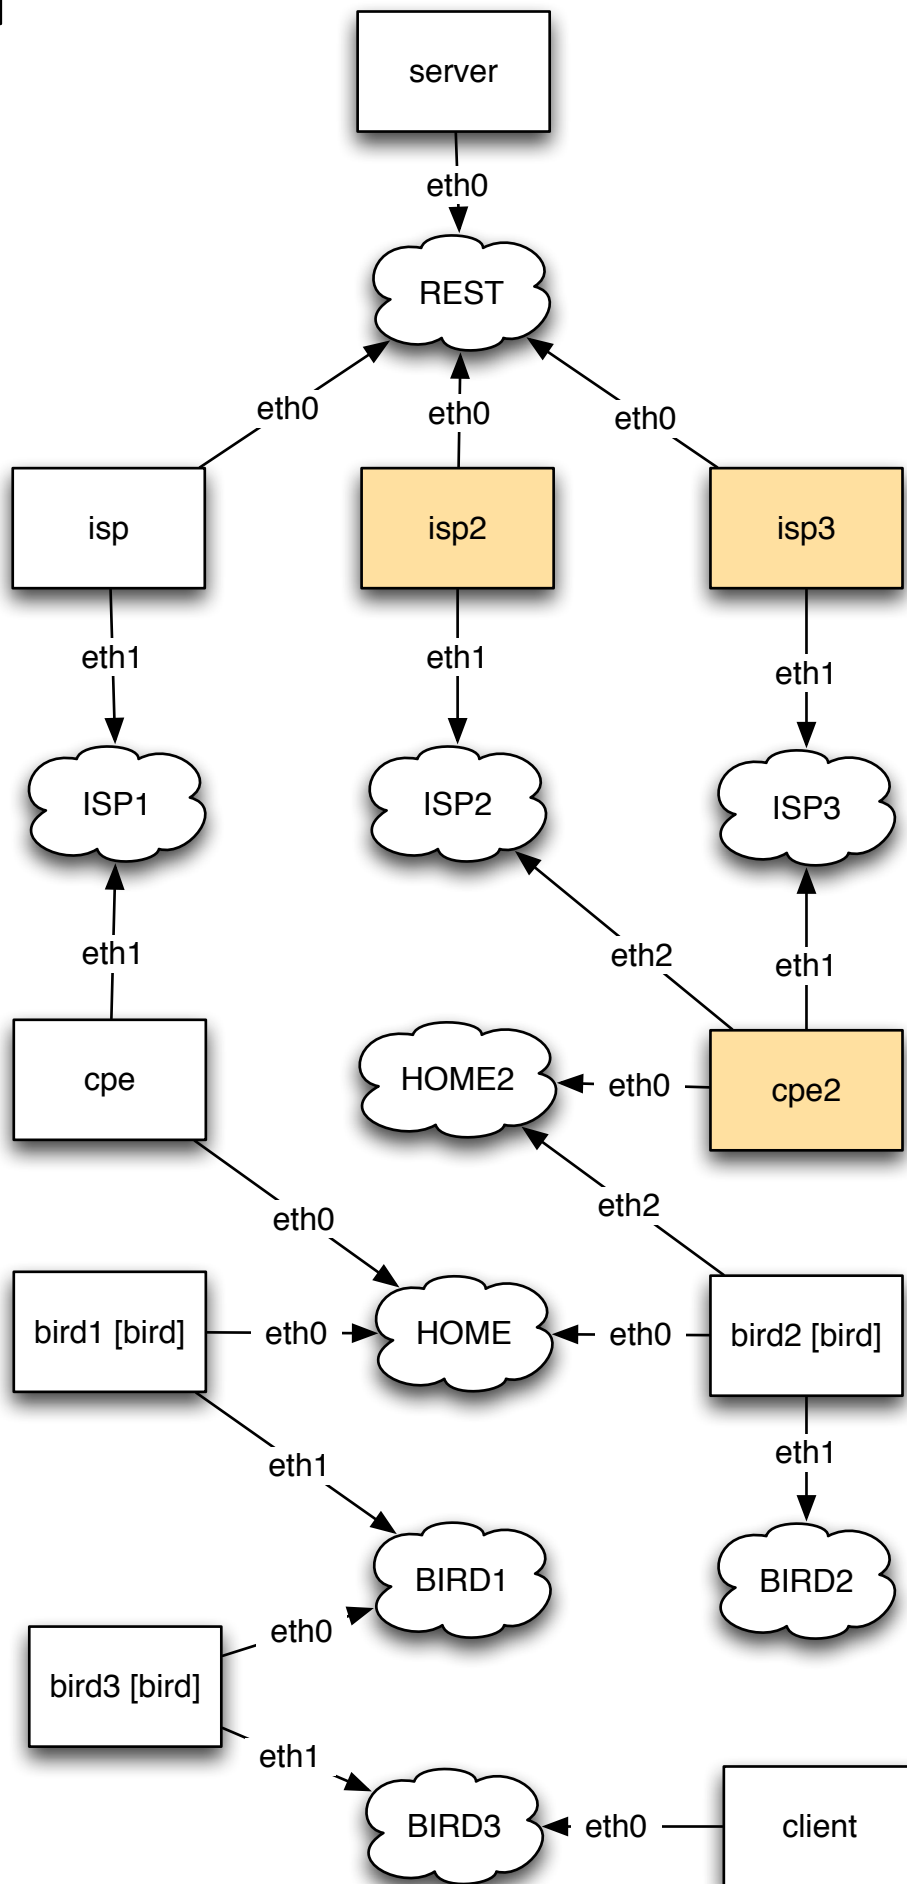


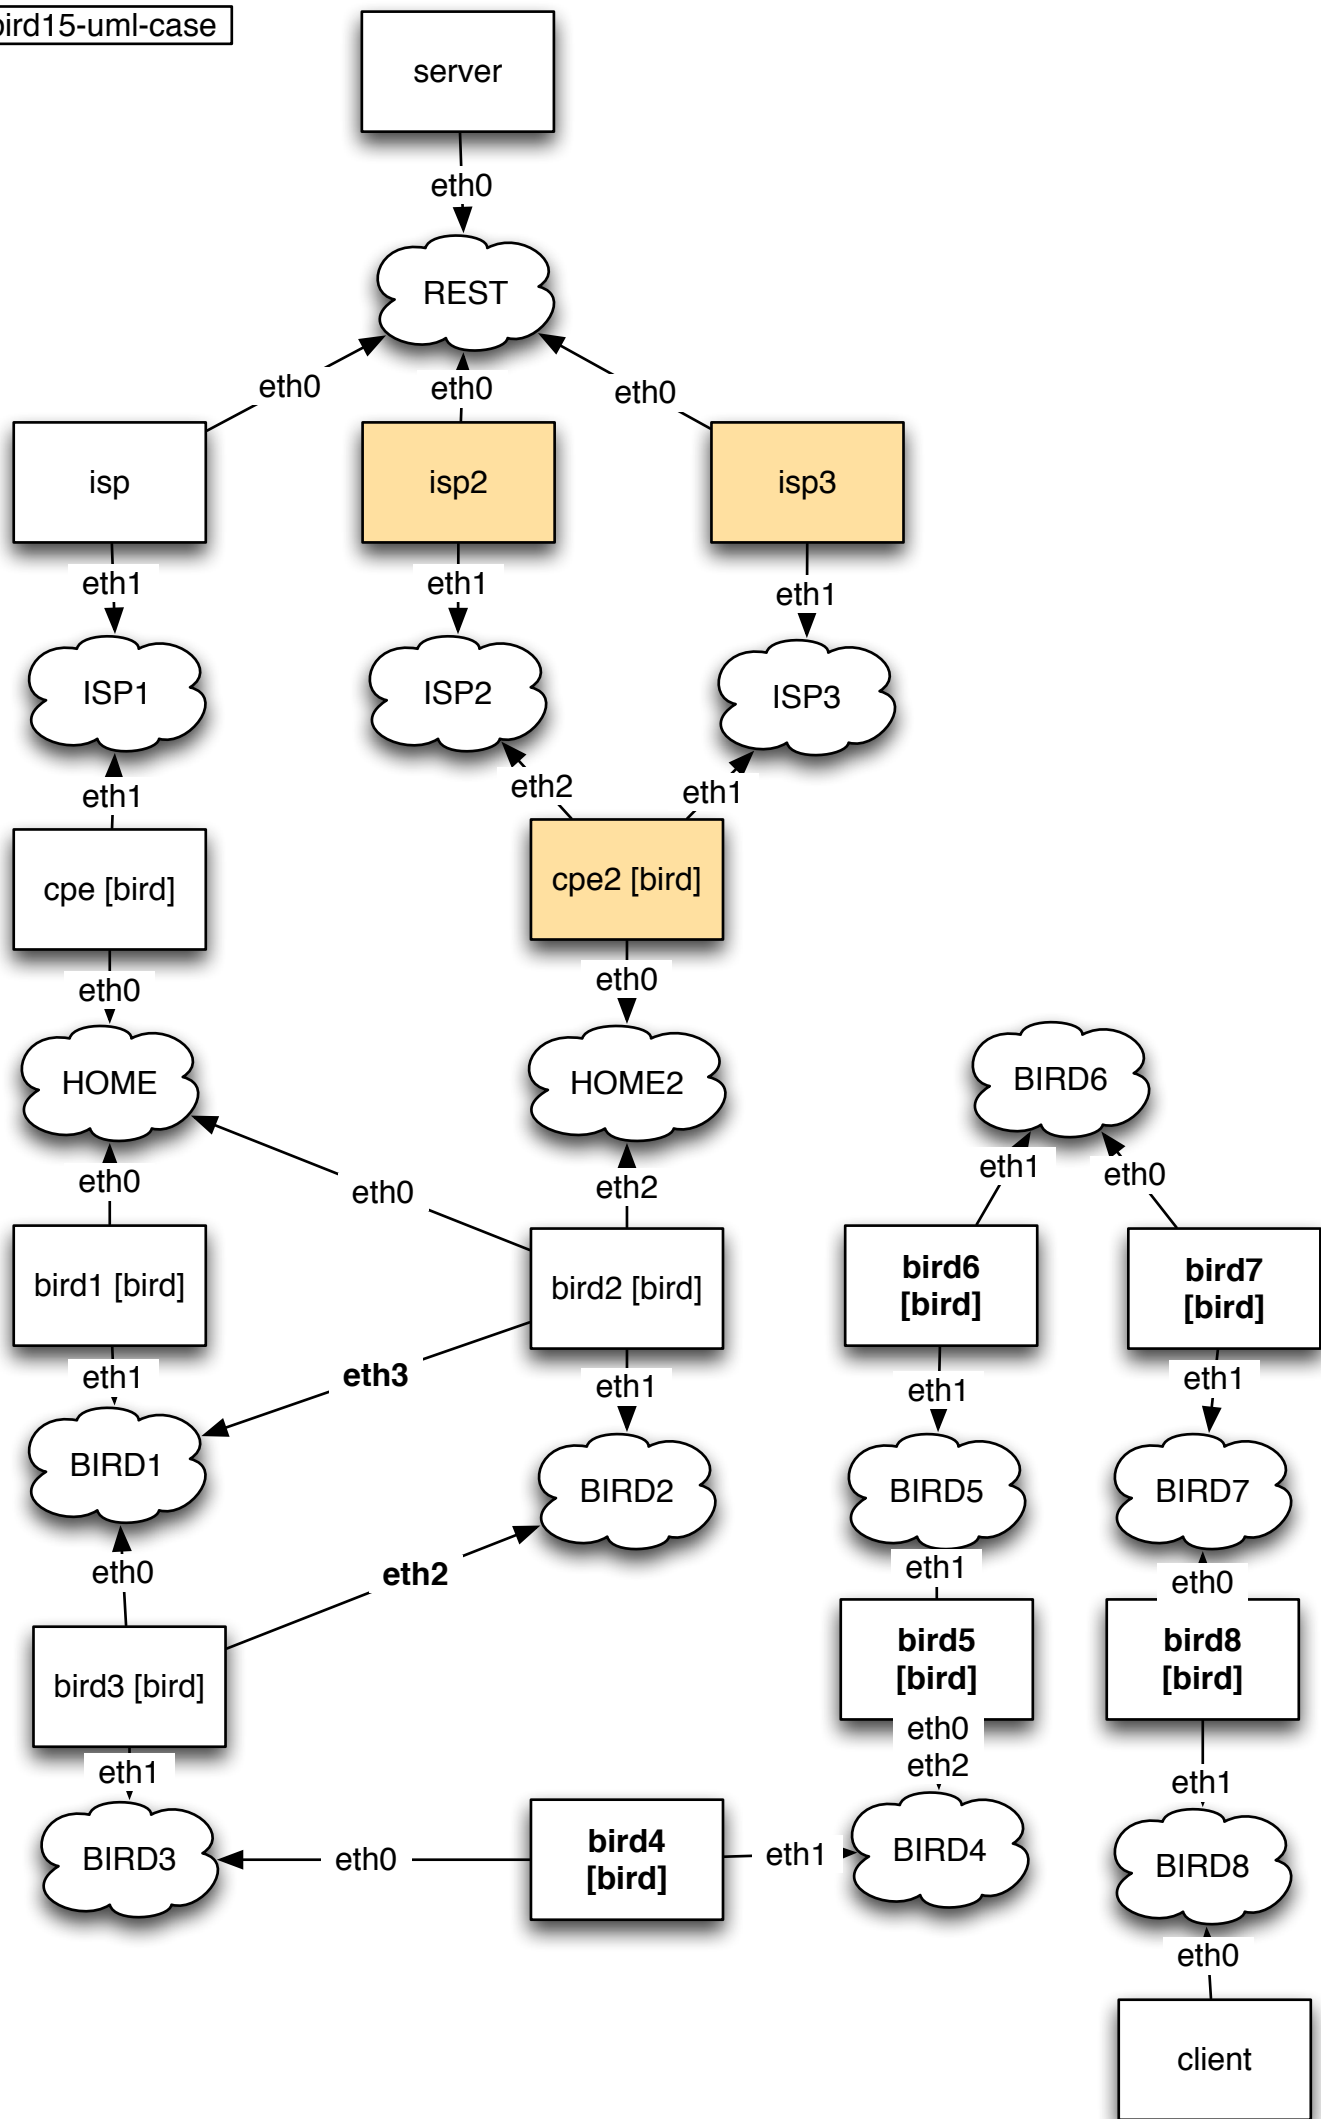





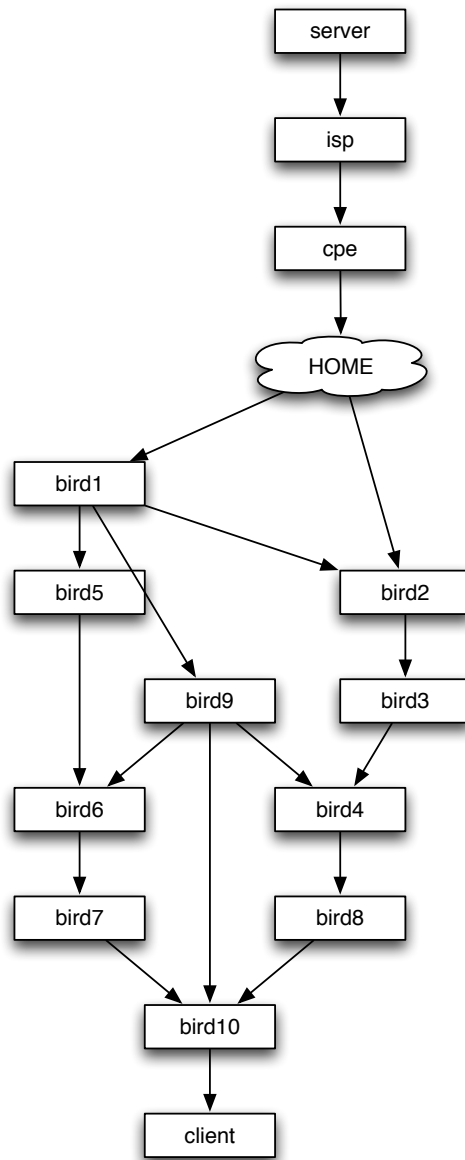

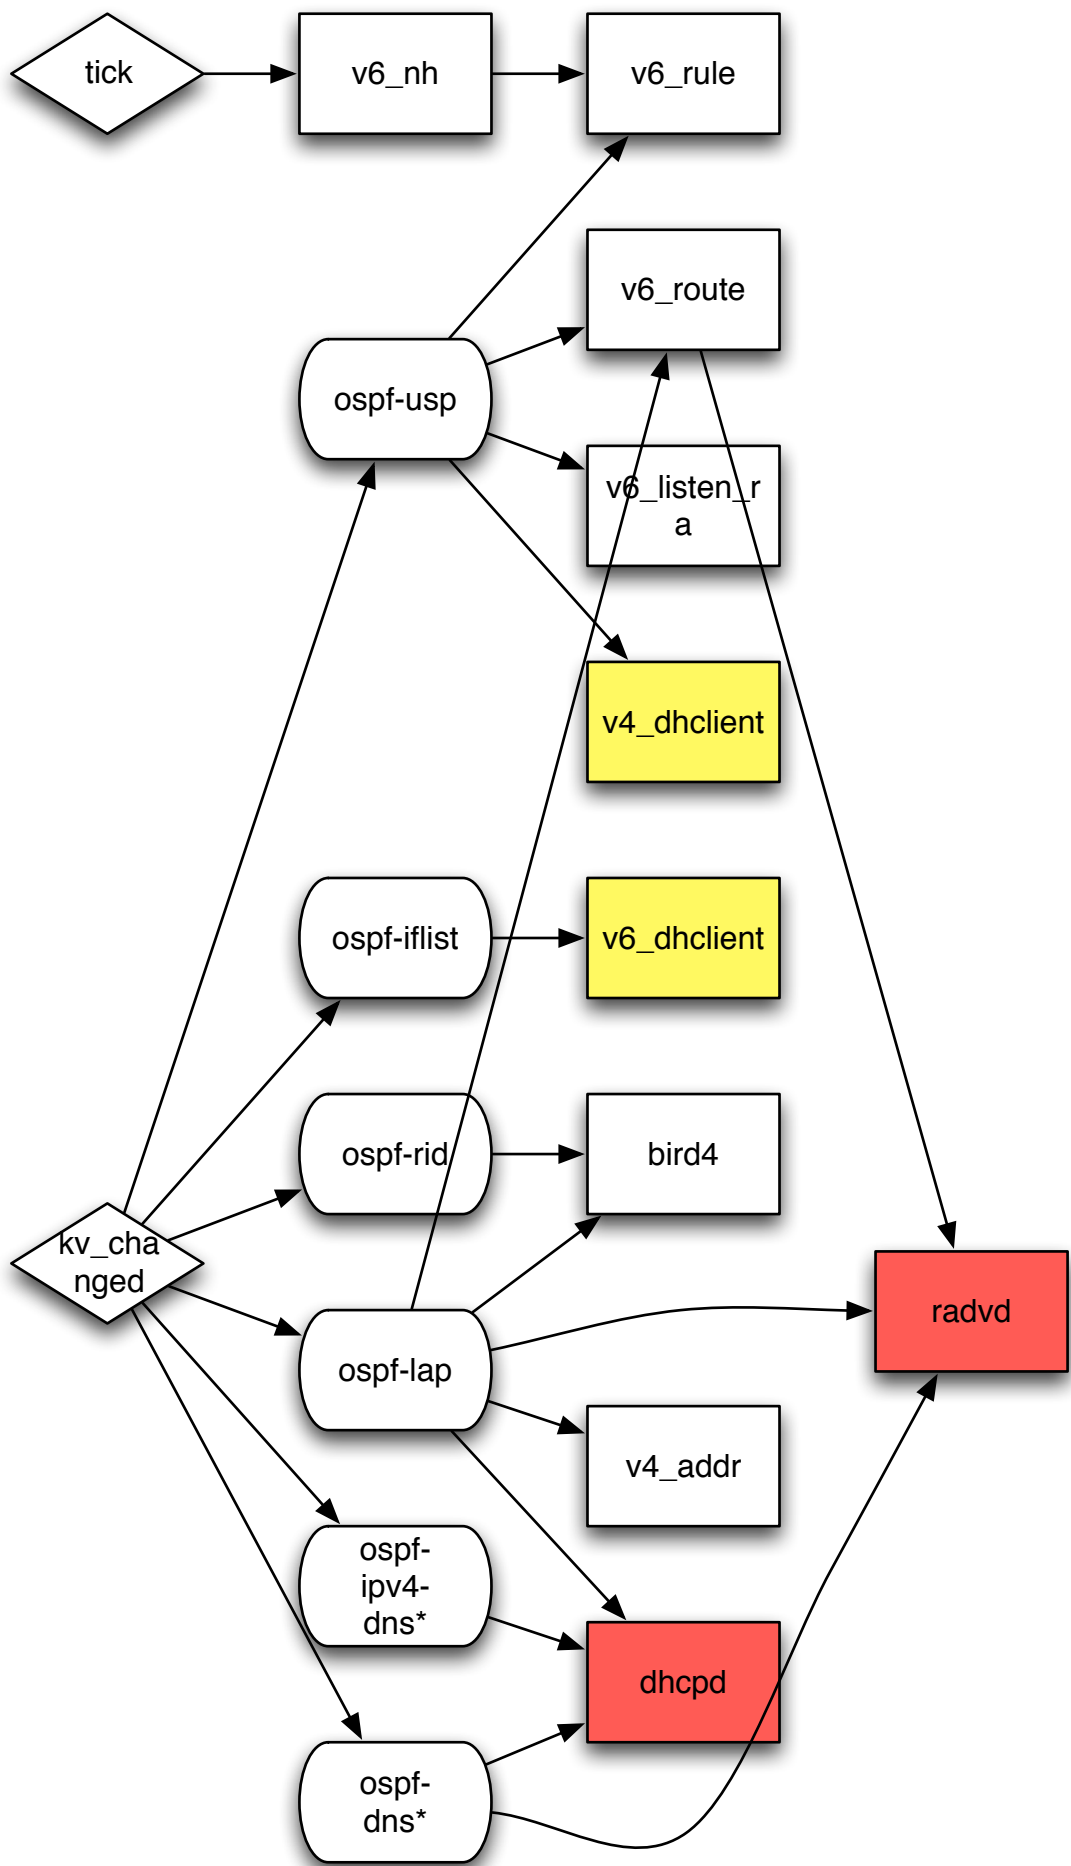


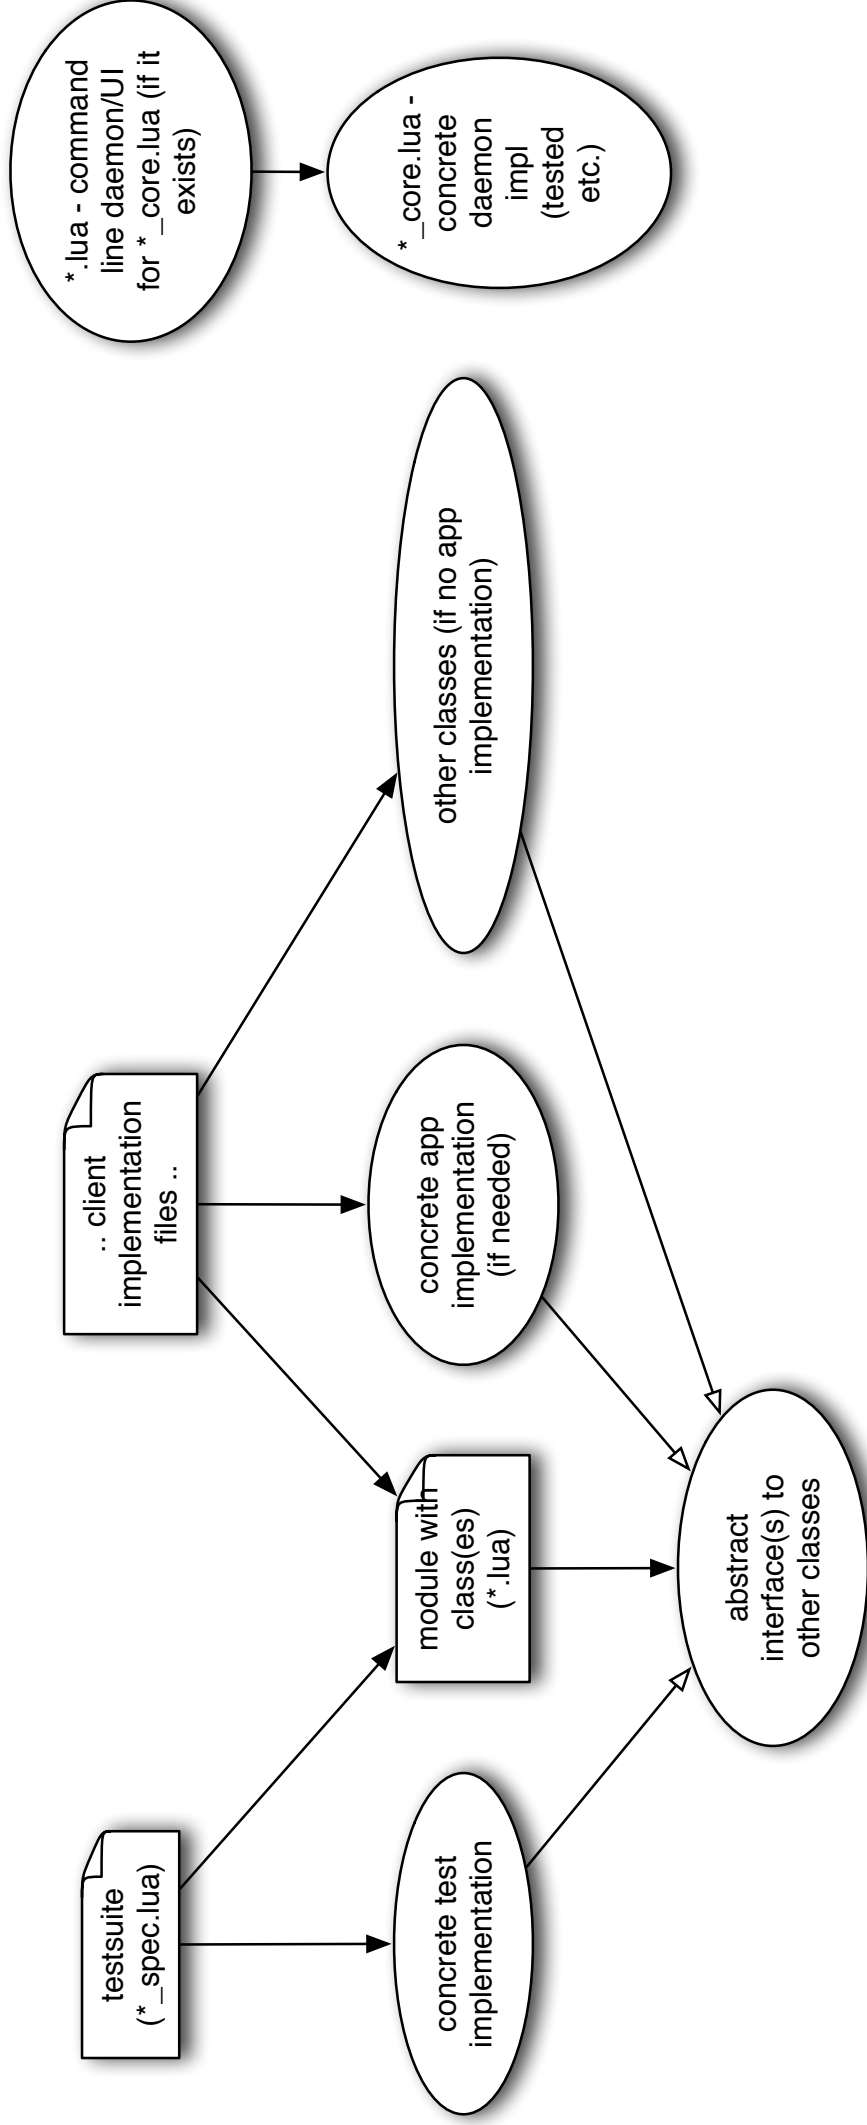

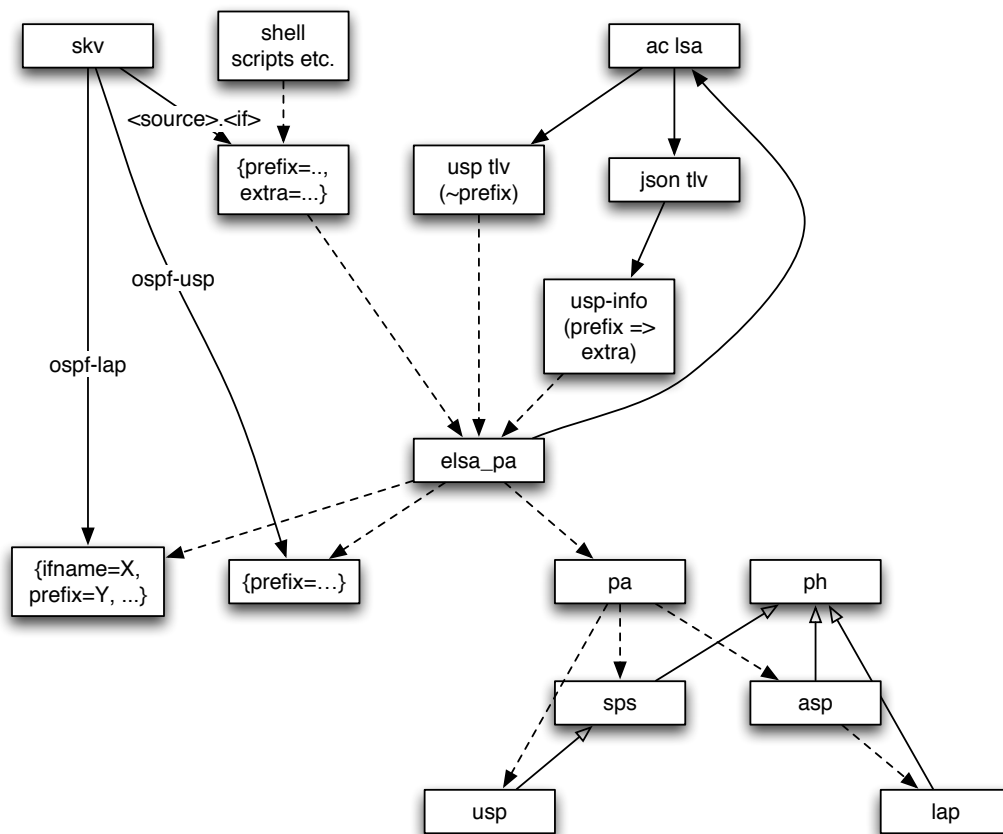

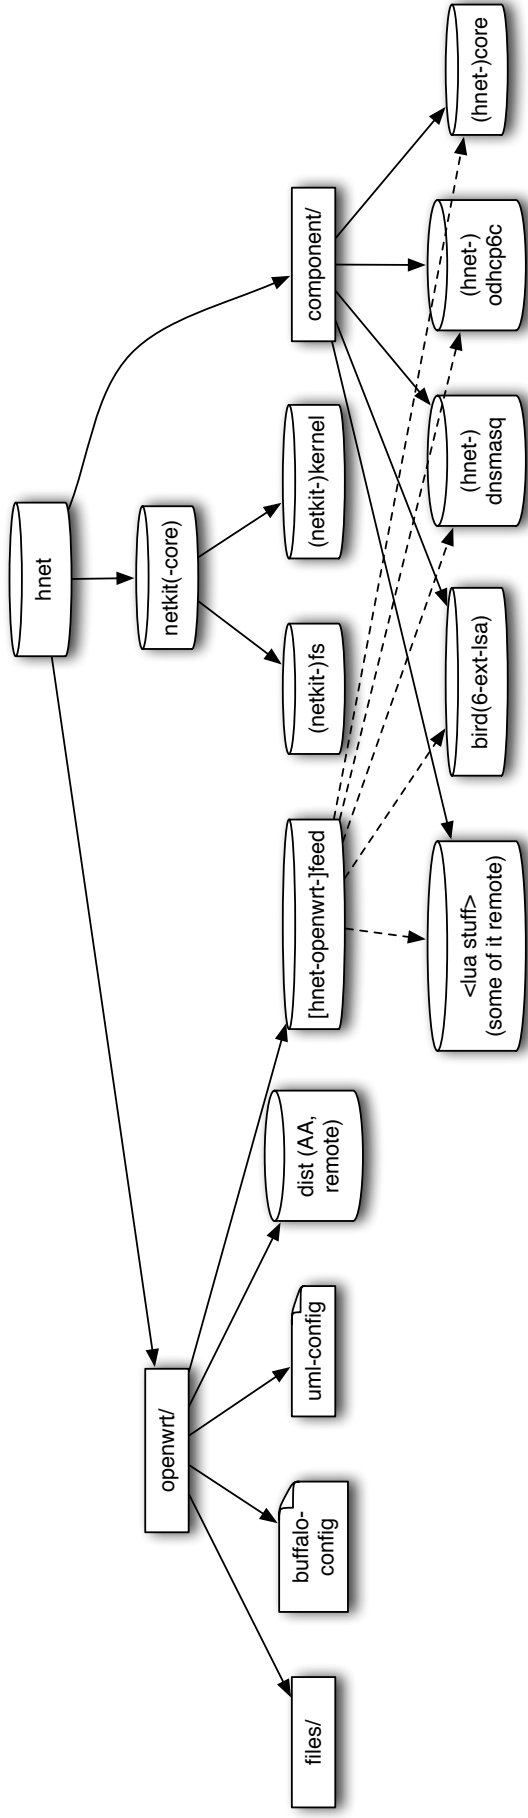


TODO? forked bird idea

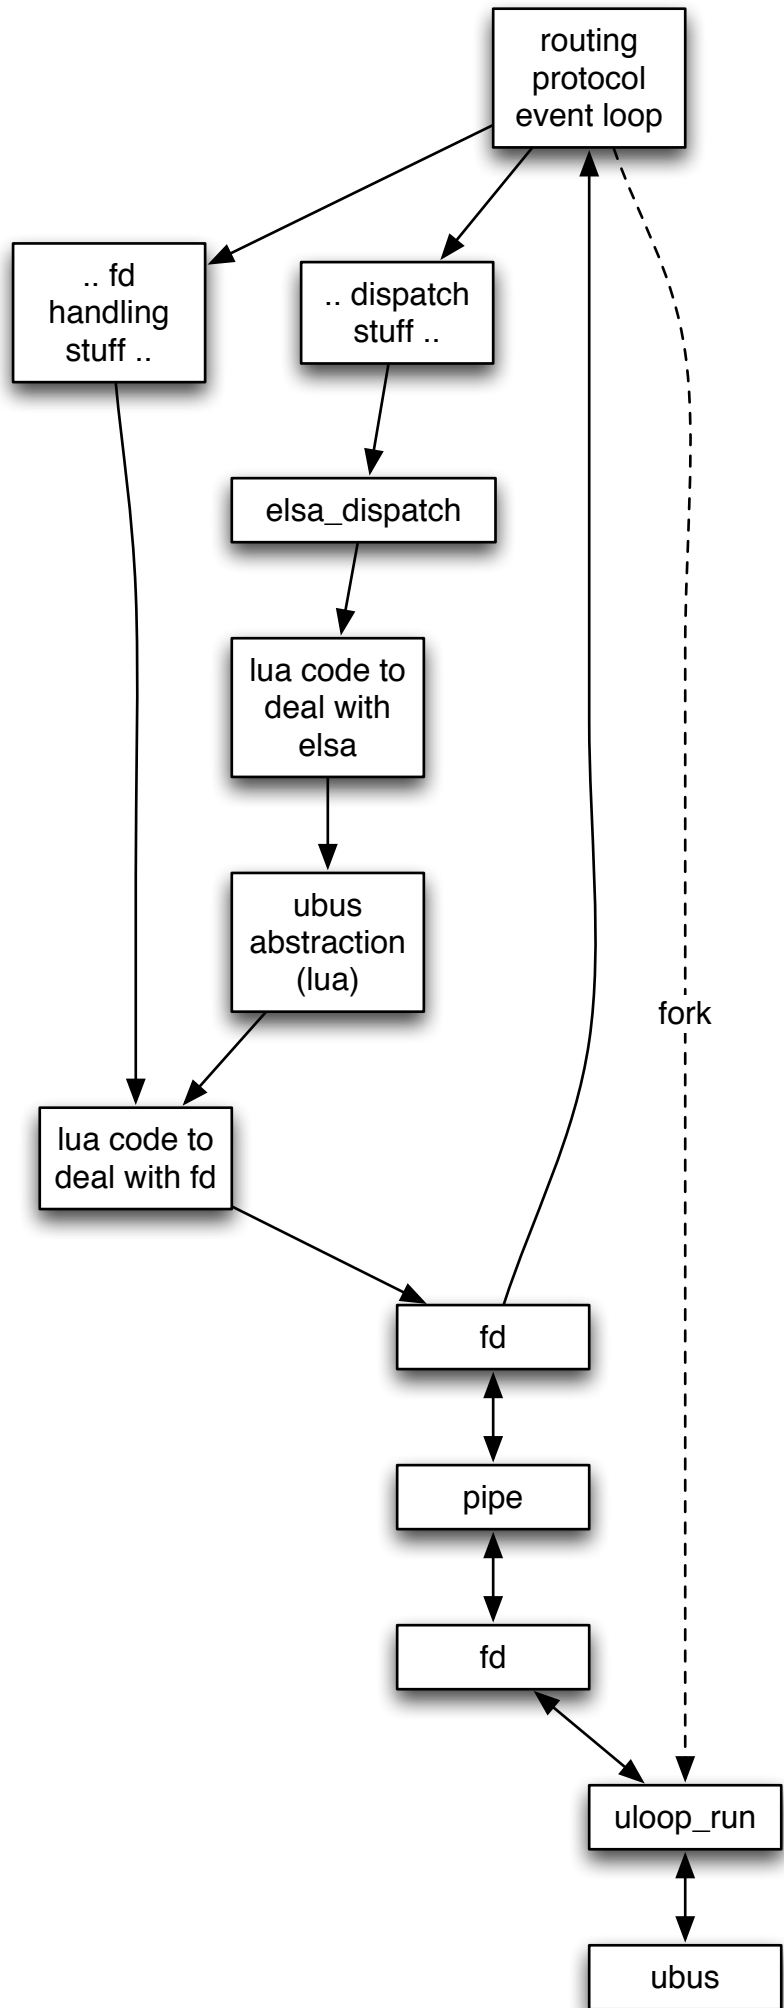

TODO? 201209 bird-elsa-lua-ubus

NOW (Bird+ELSA approach would be ..)

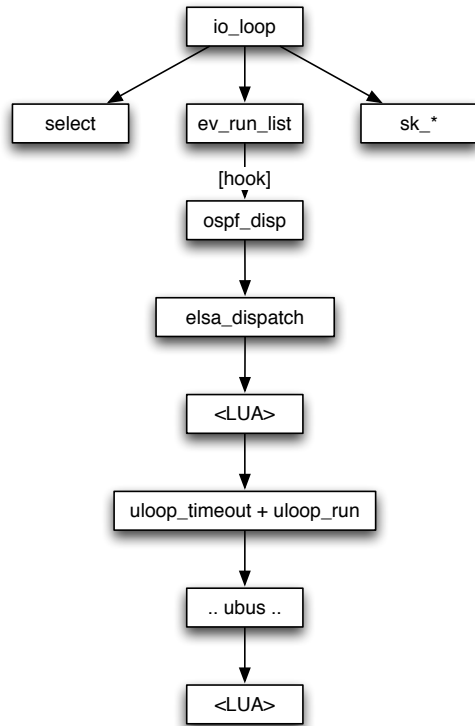

Correct? approach would be to use uloop as base event loop

