

Traide Fair Australia

During a recent trade fair visit (14.04.2025) to XAG Sydney Australia, supported by further online research, the **XAG P150 agricultural drone** was identified as a promising solution for the removal of invasive plant species. The drone features a payload capacity of up to 70 kg and uses the **RevoSpray 4 system** to apply herbicides either across wide areas or with pinpoint accuracy. The spraying system delivers fine droplets via adjustable centrifugal nozzles, enabling effective coverage on both sides of plant leaves.

The process is managed using **PIX4Dfields**, a mapping and control software. First, a drone equipped with a high-resolution camera captures detailed images of the area. In the software, the user manually marks invasive species, protected plants, and obstacles. These inputs train the software to recognize similar vegetation patterns using machine learning. The generated prescription map is then uploaded to the spraying drone, which treats only the marked zones with high precision.

Compared to ground-based mowers like the **ROBO MOWER T-90** by NetEvoTech, spraying drones offer several advantages. Mechanical mowing can lead to seed dispersion and is limited in difficult or uneven terrain. Experts advised against the use of mowers in this context and recommended drone application to avoid further spread and ensure better reach. The system is also compatible with drone charging stations from **Enovance**, which can quickly recharge batteries for continuous operation. The total cost for a two-drone system including software is approximately **AUD 50,000**.

Sources:

XAG P150 Product Page: <https://www.xa.com/en/p150>

PIX4Dfields Software Overview: <https://www.pix4d.com/product/pix4dfields>

RevoSpray 4 Spraying System: <https://www.xa.com/en/revospray>

ROBO MOWER T-90 Specs (NetEvoTech): <https://www.netevotech.com/robo-mower-t90>

Enovance Drone Charging: <https://enovance.com.au/>

XAG® P150 Agricultural Drone

XAG
INNOVATION

- Delivers precise spraying and spreading, ensuring crops get exactly what they need.
- Reduce overspray, save on chemicals, and maximize crop health.
- Works when you need it — no waiting for pilots or weather windows.



XAG® SRC4 Remote Controller

Elevate your agricultural drone operations with 6-inch ultra-bright screen, 2 km range, 5-hour battery life, and real-time connectivity for precision agriculture.




XAG® DL1 Data Link

Designed to extend your drone's communication range, eliminate signal dead zones, and ensure uninterrupted operations in even the most challenging environments.



XAG® XRTK6 Pro Mobile Station

Achieve centimetre-level accuracy with the XAG® XRTK6 Pro Mobile Station. Portable. RTK, 15 km Wi-Fi range, and offline satellite correction for precision farming.



Spot Spraying

Multi-Field Application — Ideal for small fields or targeted area applications.



Swarm Control

Swarm Operation allows for the autonomous control of two drones simultaneously.



XAG® Care P150

Fly with Peace of Mind

Comprehensive coverage for your XAG® P150, so unexpected repair costs don't slow down your farming success.

Visit Our Website for More Information ➔



+61 (2) 9168 7918



XAG-AU.COM

NetEvoTech

ROBO MOWER T-PREMIUM

Stronger Build with Eco Power Option



Battery Version Available



Choose the battery-powered option of T-PREMIUM for lower noise levels and eco-friendly, emission-free performance.



Reinforced Tracks



Upgraded Dual Blades



Powerful Lift System



Debris Protection

Optional Accessories



Snow Plough



Rotary Brush



Industrial Remote Control



Remote Control with Display and Camera



Tow Hitch



Upgraded Enclosed Design

The advanced enclosed design offers superior protection, enhancing the safety and longevity of both the machine and the operator.

- **Advanced brushless electric motor:** Efficiently powers the tracks, delivering smooth, reliable movement.
- **Durable hardened steel blades:** Built to resist wear, guaranteeing long-lasting sharpness.
- **Long-range remote control:** Manage operations effortlessly from up to 200 meters away.
- **Reinforced rubber tracks:** Engineered for durability on any terrain, giving unmatched stability.
- **Robust, impact-resistant design:** All conditions to minimize damage, ensuring top-tier resilience in all climates.
- **Self-charging hybrid drive:** Continuously powers up while the mower works, ensuring uninterrupted performance.
- **High-powered gasoline engine:** Fuels the cutting blades with strength for superior mowing efficiency.



Take your mowing to the next level with the optional automation module, enabling precise, automated navigation along pre-planned routes.



The sharp blades and powerful engine of the T-Series ensure clean, easy cuts through small shrubs.



Reinforced heavy-duty tracks with a low centre of gravity ensure stability on slopes up to 65°.



The T-Series' super-low profile and 360° rotation easily navigate under solar panels.



Maneuverability allows smooth cutting under trees, without damaging fruit trees or



Maintenance

The T-Series' powerful climbing ability ensures efficient maintenance of your

maintenance of steep
embankments.

Compare Model Specification:

		
	T 90	T-PREMIUM
 Dimensions:	140cm x 130cm x 63cm	140cm x 140cm x 70cm
 Weight:	31.5kg	36kg
 Mowing width:	90cm	90cm
 Efficiency:	3000-4500m ² /h	3000-4500m ² /h
 Engine type:	Four-stroke engine	Four-stroke engine
 Speed of movement:	0-5km/h	0-5km/h
 Maximum working slope:	65°	65°
 Blade lifting range:	1-20cm	1-20cm
 Maximum cutting height:	2m	2m
 Remote control range:	200m	200m

NetEvoTech

ROBO MOWER T-90

Unleash the Power, Conquer Any Terrain



Reinforced Tracks



Upgraded Blades



Powerful Lift System



Debris Protection

Optional Accessories



Cargo Platform



Atomizer 200L



Horizontal and
Vertical Sprinkler 200L



Snow Plough



Rotary Brush



Industrial
Remote Control



Remote Control with
Display and Camera



Tow Hitch

✉ sales@xag-au.com

🌐 www.xag-au.com

☎ +61 (2) 9168 7918

Overall solution for drone charging

Model: O-Power 21 (Battery Pack)



Model: IBC6000W (AC-DC Charger)

Model: IBC10000W (DC-DC Charger)



Efficient & Time-saving

Battery pack takes only 5 hours to fully charge with 220V mains power, and only 2 hours with the EV DC fast charger. Only takes about 8 minutes to charge the drone battery.



Worry-free & Reliable

300V cycle warranty, worry-free.
Five-year warranty, free repair for non-man-made faults.
Accidental spontaneous combustion insurance up to 1 million dollars.



Silent & Zero Pollution

No noise pollution, no maintenance required.



Economical & Affordable

80% reduction in charging costs compared to gasoline generators.

O-Power 21 (Battery Pack)

Model	O-Power 21 (Battery Pack)		
Cell technology	LiFePO ₄	Nominal voltage	76.8V
Dimension (D*W*H)	820*580*295mm	Recommended crate	0.5C
Package size (D*W*H)	1300*730*540mm	USB interface voltage	5V
Weight(Net weight)	174.5kg	USB interface power	65W
Nominal capacity	280Ah	Display	4.3 inches
Nominal energy	21.5kWh	Heat dissipation method	Air cooling
Battery group mode	1P24S	Ingress protection	IP20
Rated charge/discharge current	140A	Working altitude	≤3000m
Max.Charge/Discharge current	200A	Operating temperature	0-50°C
Operating voltage	67.2V - 84.24V	Cycle life	≥3000 Cycles

IBC6000W (AC-DC Charger)

Model	IBC6000W (AC-DC Charger)		
Dimension (D*W*H)	450*223.4*66.2mm	Power	6kW
Weight (Net weight)	8.5 kg	Input method	L+N+PE
Rated input voltage	220Vac	Heat dissipation method	Air cooling
Input voltage range	90Vac-264Vac (90 - 185Vac derating 2000W output)	Ingress protection rating	IP20
Output voltage range	60Vdc - 87.6Vdc	Working altitude	≤3000m
Output current	0 - 70A	Operating temperature	0-50°C

IBC10000W (DC-DC Charger)

Model	IBC10000W (DC-DC Charger)		
Dimension (D*W*H)	550*230*94.5mm	Output power	10kW
Weight (Net weight)	14.5kg	Heat dissipation method	Air cooling
Input voltage range	65Vdc-100Vdc	Ingress protection	IP20
Output voltage range	0.5Vdc-58.8Vdc	Working altitude	≤3000m
Output current	0 - 180A (Default 150A)	Operating temperature	0-50°C



XAG® P150

RevoCast P4

XAG
AUSTRALIA

Effortless precision,
unmatched productivity




115 L
Granule
Container

280 Kg/min
Max.
Spread Rate

3-8 m'
Spread
Swath

70 Kg
Payload


2,167 Kg/hr²
Spreading Efficiency



Versatile
Screw Feeders



Vertical
Waving Spreader



Dual-Side
Large Filling Ports



WWW.XAG-AU.COM

168 7918



WWW.XAG-AU.COM



XAG® P150




RevoSpray P4

Pioneering intelligent rotary atomisation
for superior crop protection in any environment



3-8 m¹
Spread
Swath

7 kg/hr²
Efficiency



**Dual-Side
Large Filling Ports**

Factors, temperature, and user handling.
conditions.
ing, and 18 m/s speed in open fields.

18 m/s
Max. Flight Speed

30 L/min
Max. Flow Rate

5-10 m
Spraying Width

26 ha/h¹
Spraying Efficiency

60-500 µm
Droplet Size Range



70 L Smart Liquid Tank



Advanced Centrifugal Nozzles



Flexible Impeller Pumps

Spraying Efficiency: The spraying efficiency is measured at a 20 L/Ha application volume, 10 m spacing, and 18 m/s speed in open fields. Actual performance may vary due to real-life conditions.



WWW.XAG-AU.COM

+61 (2) 9168 7918



COM

Spraying Efficiency: The spraying efficiency is measured at a 20 L/Ha application volume, 10 m spacing, and 18 m/s speed in open fields. Actual performance may vary due to real-life conditions.

WWW.XAG-AU.COM

XAG® P150

XAG
AUSTRALIA

TRADE-IN DEALS AVAILABLE:

UPGRADE TO A XAG P150 TODAY.



XAG® P150

up to **26** ha/h

OVERALL SPRAYING
EFFICIENCY¹

Older Model

up to **19** ha/h

OVERALL SPRAYING
EFFICIENCY²

≈ more than a **36% increase in productivity**



Contact us now for a free
valuation on your current
models trade in!

COMPARISON WITH OLDER AGRICULTURAL DRONES

	Tank Size	Max Operational Speed	Max Flow Rate
P150	70L	18 m/s	30 L/min
P100 Pro	50L	13.8 m/s	22 L/min
P100	40L	13.8 m/s	12 L/min
V40	16L	10 m/s	10 L/min
P30	16L	8 m/s	5.6 L/min
Other	40L	10 m/s	12 L/min

Spraying Efficiency: The spraying efficiency is measured at a 20 L/Ha application volume, 10 m spacing, and 18 m/s speed in open fields. Actual performance may vary due to real-life conditions.
19 ha/h is for normal, large-volume spraying (such as wheat pest control). P100 Pro operating parameters: 30 L/Ha, 9 m flight route spacing, 13.8 m/s flight speed.

XAG
AUSTRALIA


WWW.XAG-AU.COM



+61 (2) 9168 7918

XAG
AUSTRALIA



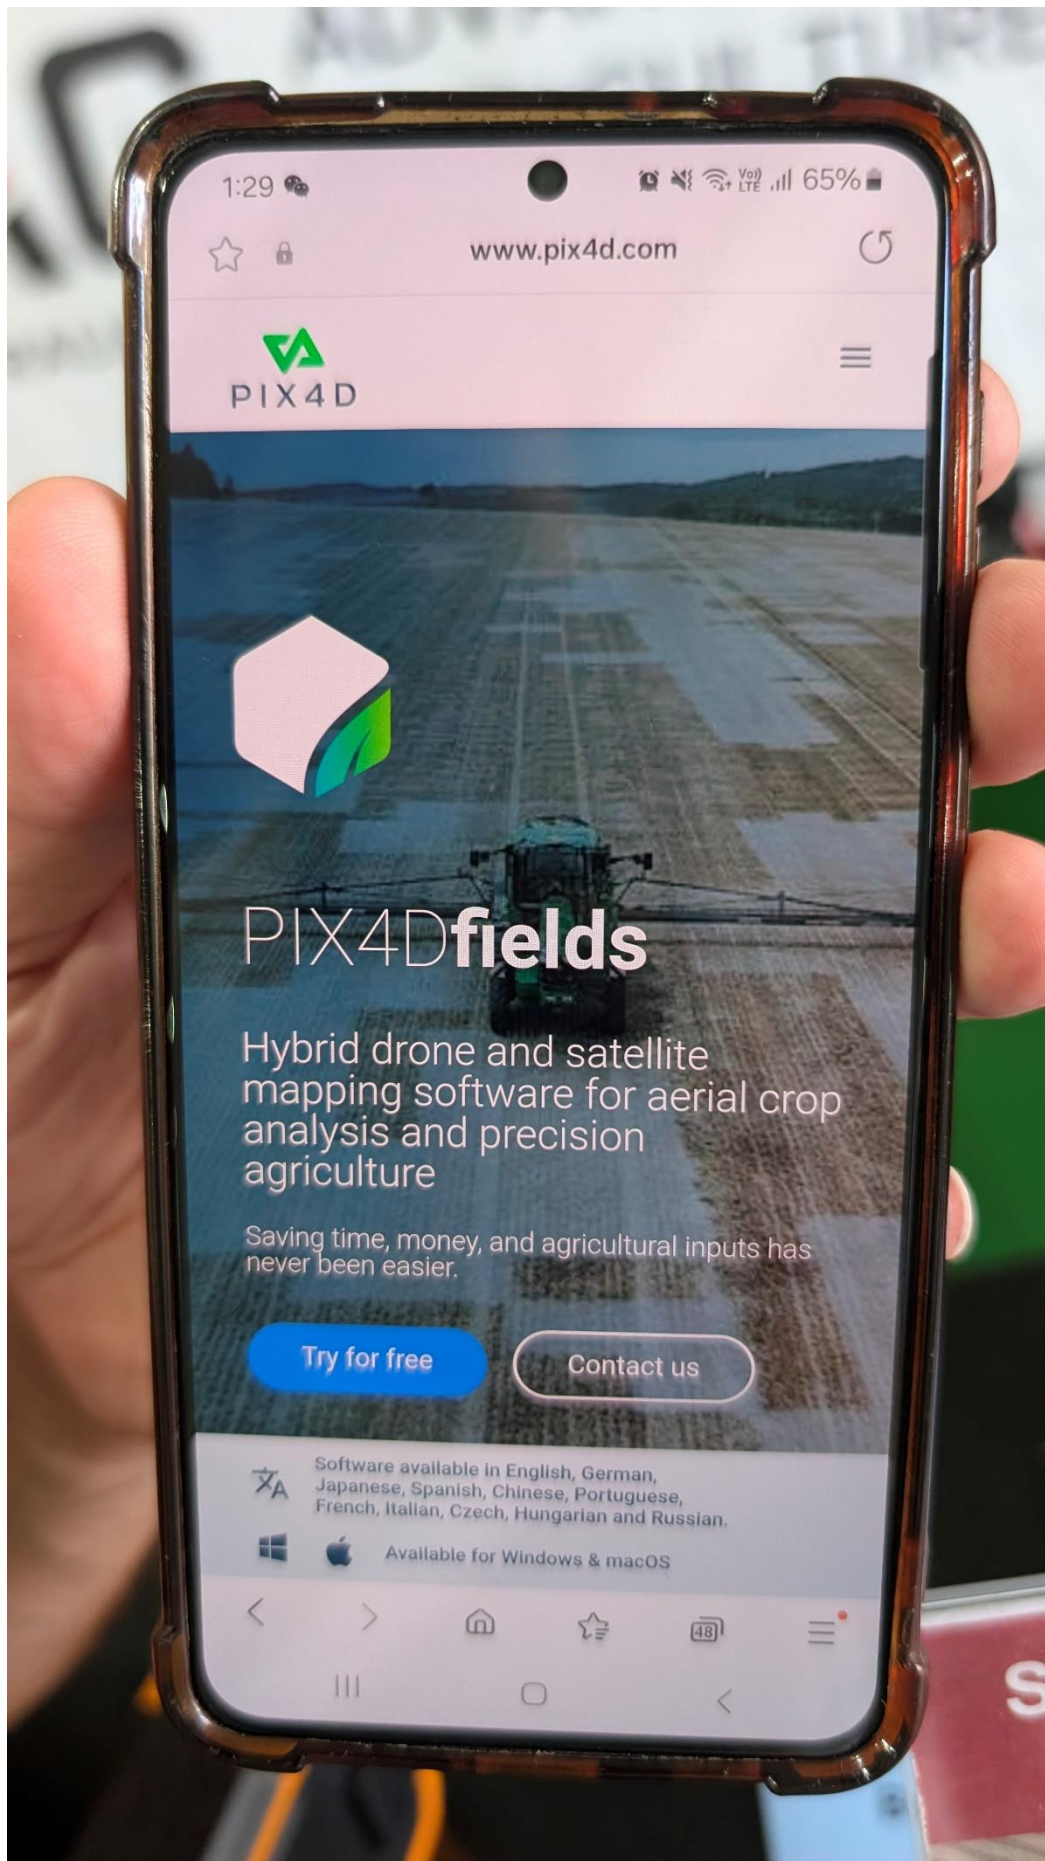

1:29

65%

www.pix4d.com



PIX4Dfields

Hybrid drone and satellite
mapping software for aerial crop
analysis and precision
agriculture

Saving time, money, and agricultural inputs has
never been easier.

[Try for free](#)

[Contact us](#)



Software available in English, German,
Japanese, Spanish, Chinese, Portuguese,
French, Italian, Czech, Hungarian and Russian.



Available for Windows & macOS

1:29

VoLTE 65%



www.pix4d.com



PIX4Dfields

Hybrid drone and satellite
mapping software for aerial crop
analysis and precision
agriculture

Saving time, money, and agricultural inputs has
never been easier.

Try for free

Contact us




Software available in English, German,
Japanese, Spanish, Chinese, Portuguese,
French, Italian, Czech, Hungarian and Russian.



Available for Windows & macOS



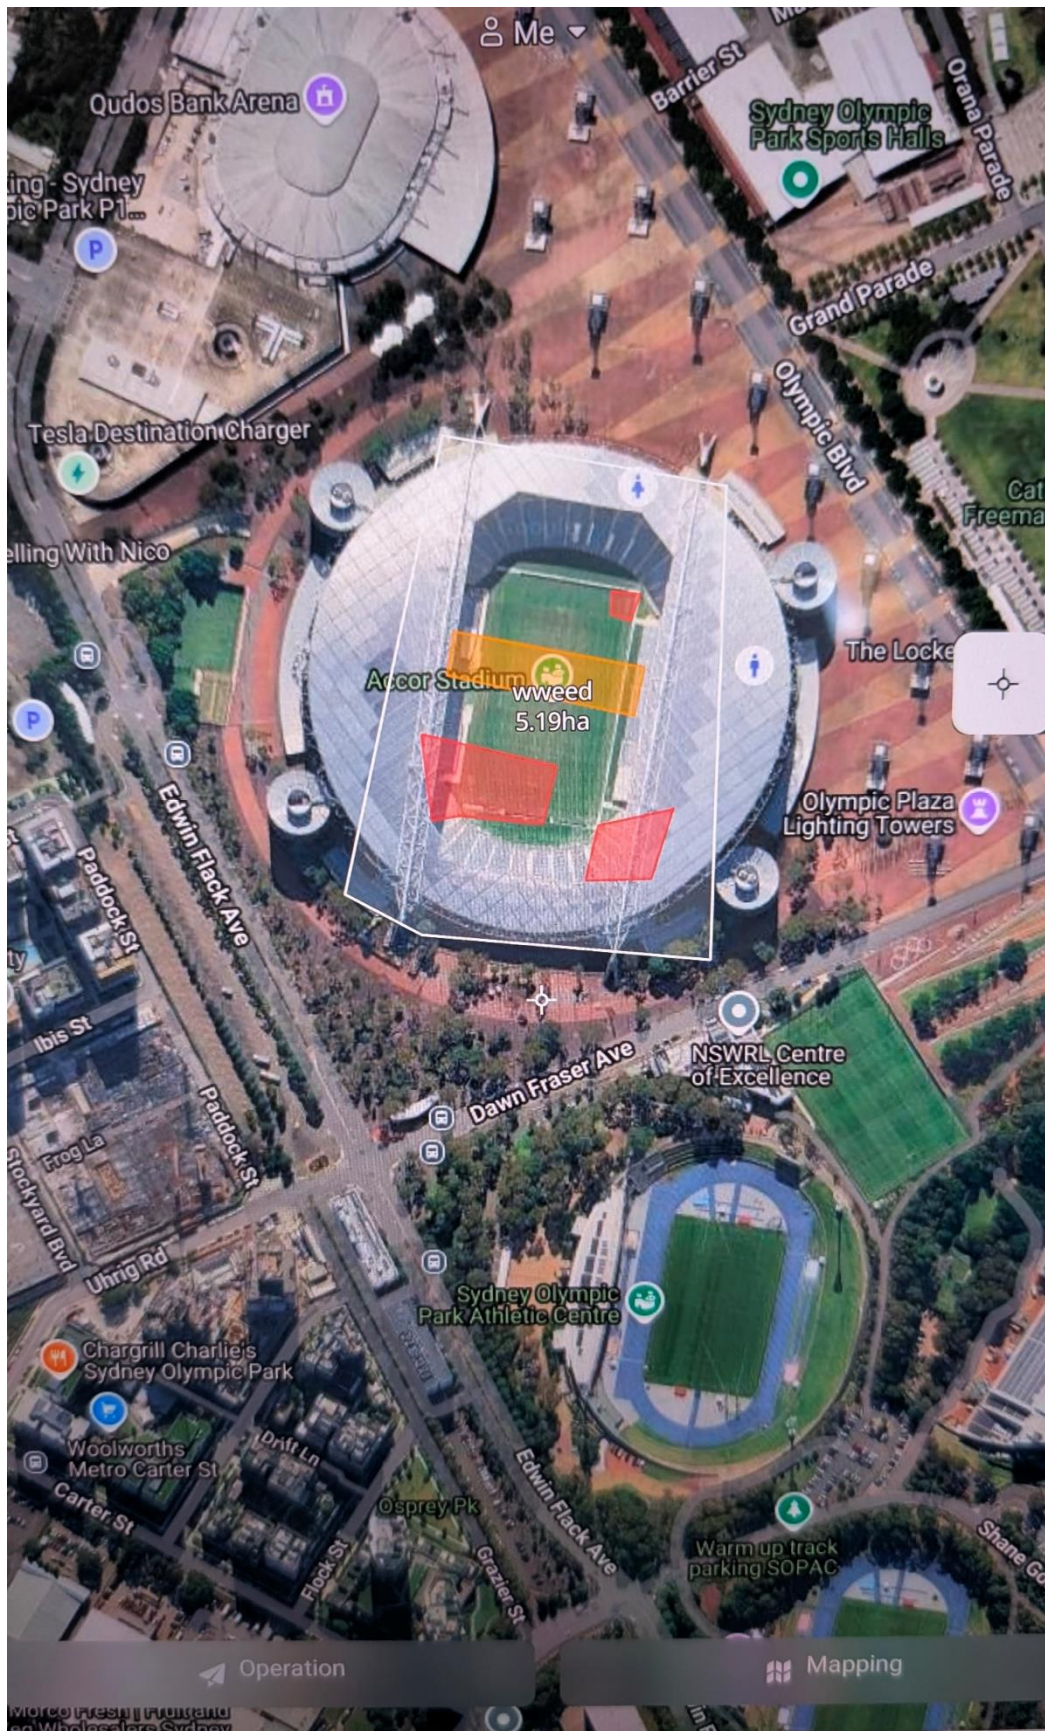

This is how the App looks... Red is no go area and orange is spray area