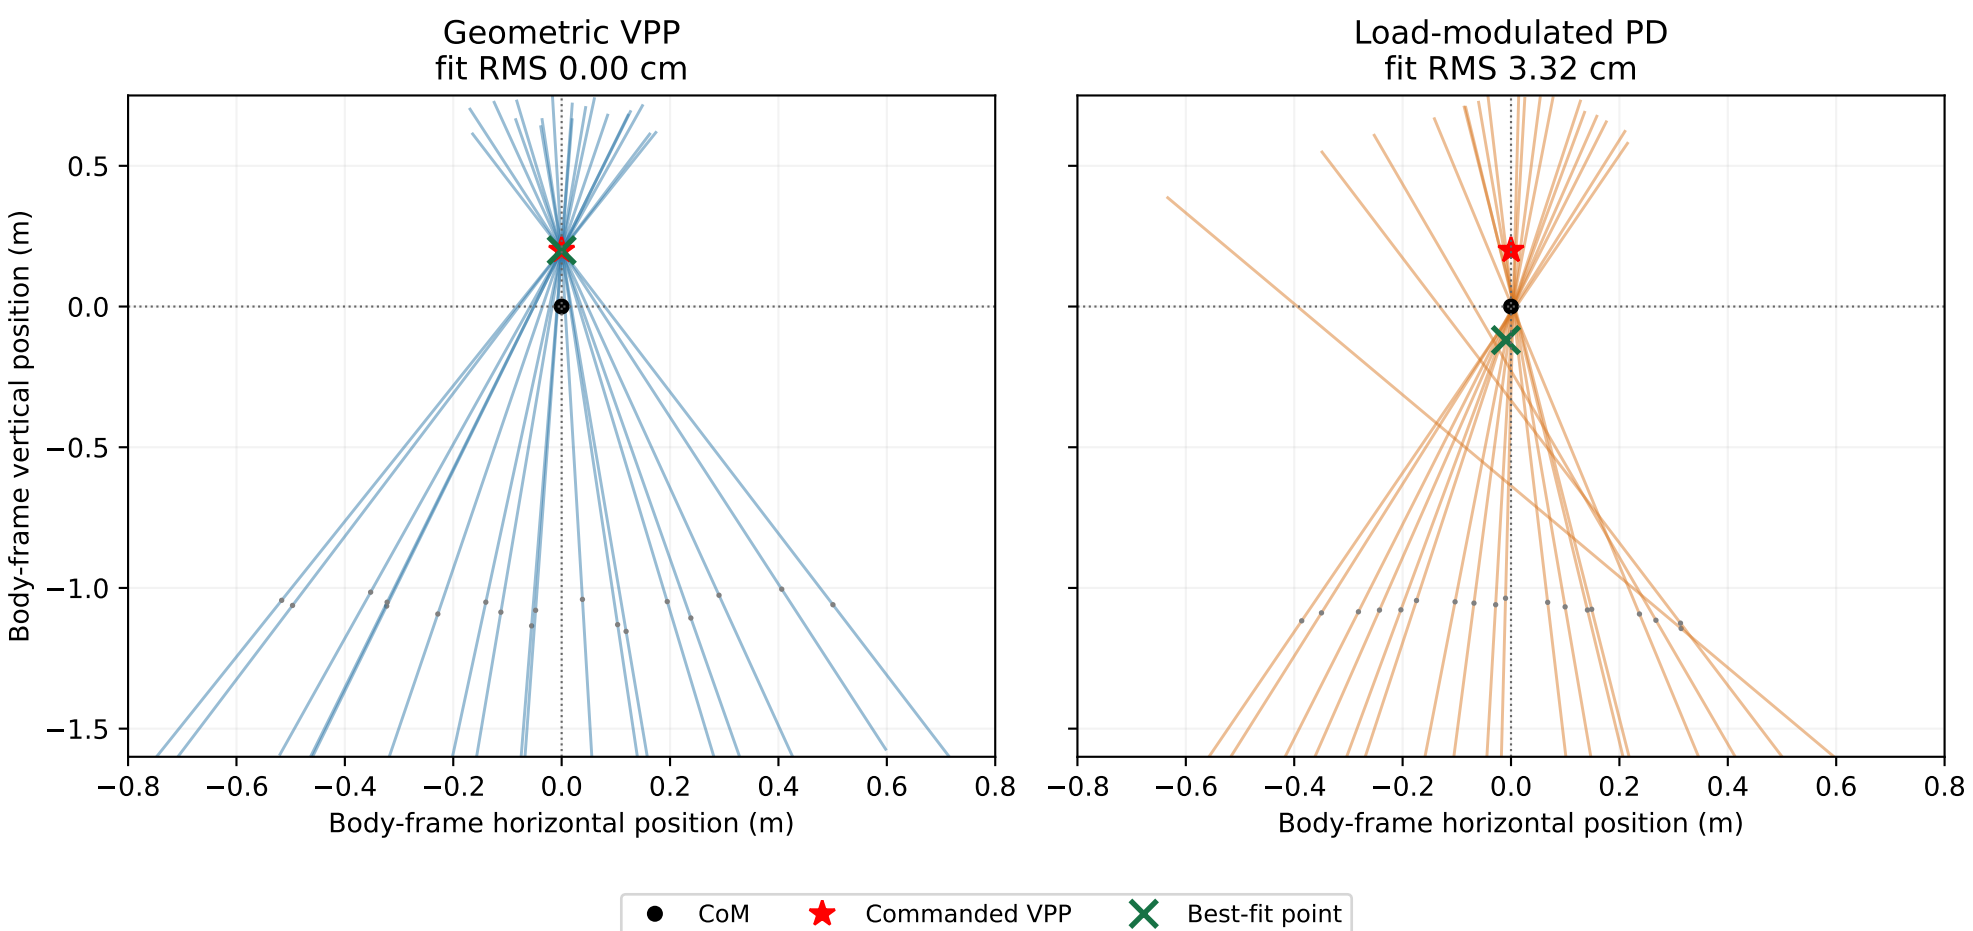
Geometric VPP
fit RMS 0.00 cm
Load-modulated PD
fit RMS 3.32 cm
Body-frame vertical position (m)
0.5
0.0
−0.5
−1.0
−1.5
−0.8
−0.6
−0.4
−0.2
0.0
0.2
0.4
0.6
0.8
Body-frame horizontal position (m)
CoM
Commanded VPP
Best-fit point