





Power Regulator Section

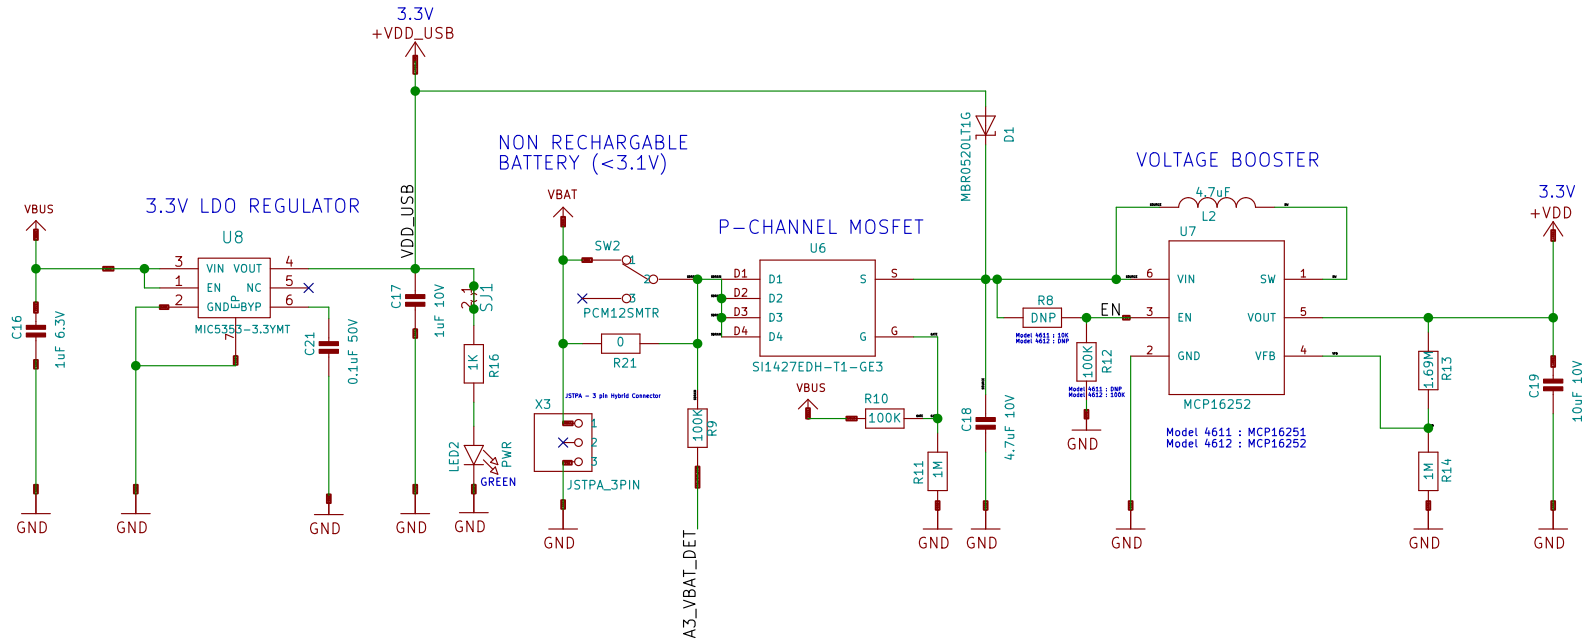

Micro USB Connector

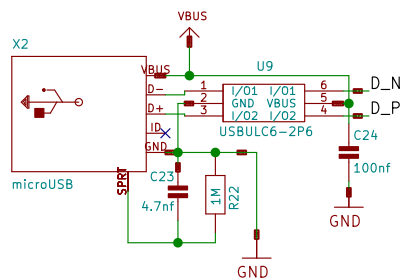

VBUS Monitoring

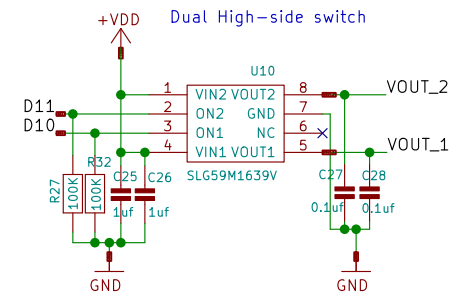

Model	R28	U7	R8	R12	Notes
4611	DNP	MCP16251	10K	DNP	On 4611, PA8 high enables TCXO only; boost regulator is always enabled, so VDD is always 3.3V until shutdown
4612	0	MCP16252	DNP	100K	On 4612, PA8 high enables TCXO and boosts VDD to 3.3V; PA8 low causes VDD to drop to VIN (typically Vbat - 100 mV). VDD on the I/O ports changes based on whether A0 is high or low.

Drawing number : 234001102

MCCI Corporation

Sheet: /Power_Module/

File: Power_Module.sch

Title: Catena 4611/4612 Schematic

Size: A4 Date: 2019-03-05

KiCad E.D.A. kicad (5.0.2)-1

Rev: Rev C
Id: 3/3

MCCI